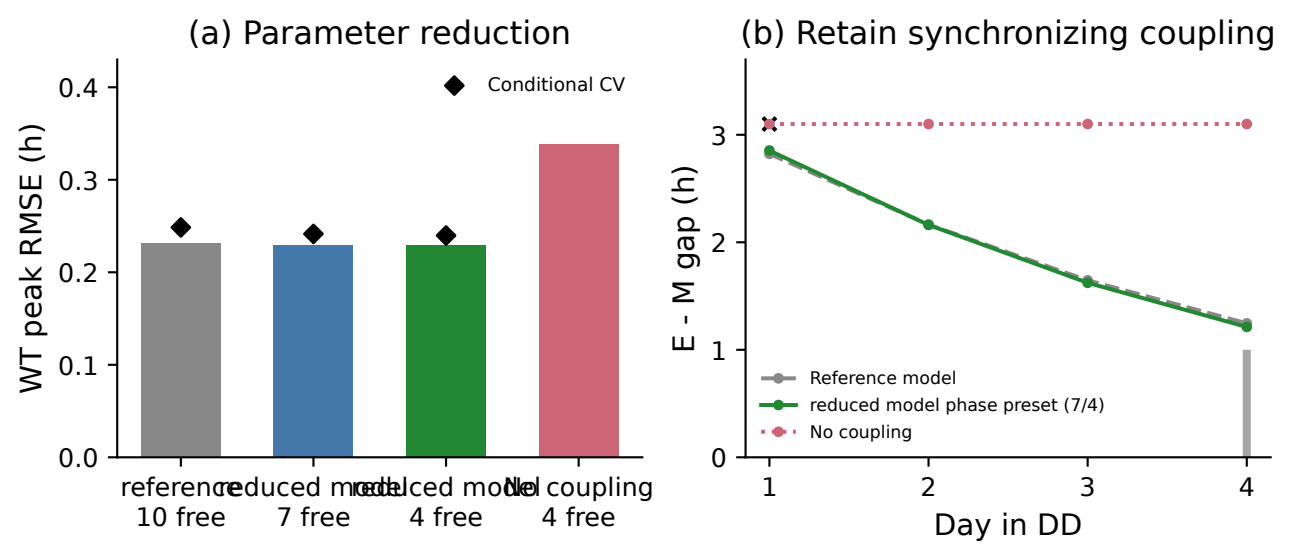
(a) Parameter reduction
WT peak RMSE (h)
0.0
0.1
0.2
0.3
0.4
Conditional CV
reference
10 free
reduced model
7 free
reduced model
4 free
No coupling
4 free
(b) Retain synchronizing coupling
E - M gap (h)
0
1
2
3
Reference model
reduced model phase preset (7/4)
No coupling
1
2
3
4
Day in DD