

Coherent Three-Photon Excitation of the Strontium Clock Transition

Junyu He (何君鈺),[1] Benjamin Pasquiou,[1,2,3,4] Rodrigo González Escudero,[1]
Sheng Zhou (周晟),[1] Mateusz Borkowski,[1] and Florian Schreck[1,2,*]

[1] *Van der Waals-Zeeman Institute, Institute of Physics, University of Amsterdam, Science Park 904, 1098XH Amsterdam, The Netherlands*
[2] *QuSoft, Science Park 123, 1098XG Amsterdam, The Netherlands*
[3] *CNRS, UMR 7538, LPL, F-93430, Villetaneuse, France*
[4] *Laboratoire de Physique des Lasers, Université Sorbonne Paris Nord, F-93430, Villetaneuse, France*

(Dated: November 18, 2024)

We demonstrate coherent three-photon excitation of the strontium clock transition with a contrast of 51(12)% using a Bose-Einstein condensate. We follow it up with a demonstration of three-photon STIRAP-like transfer, overcoming the typical limitations of this technique to odd-level numbers. We also measure the two-body loss coefficient of ^{84}Sr clock-state atoms. Our work constitutes an essential step towards outcoupling a continuous atom laser beam and provides a fast excitation mechanism for quantum simulation using bosonic alkaline-earth-like atoms.

arXiv:2406.07530v4 [cond-mat.quant-gas] 15 Nov 2024

Two-valence-electron atoms like Sr and Yb offer significant advantages over alkali atoms for quantum sensing [1–3], simulation [4, 5] and computing [6, 7]. These advantages originate in a narrow-line transition enabling laser cooling to the microkelvin scale, a ground state free of electronic magnetic moment (^{1}S$_0$), metastable excited states (^{3}P$_{0,2}$), single-photon Rydberg transitions from those states, and an ultranarrow optical clock transition (^{1}S$_0$ – ^{3}P$_0$). The clock transition provides the frequency reference optical atomic clocks [1, 8], enables elegant atom interferometric gravitational-wave detectors [2, 3], and qubits [6, 9, 10].

Bosonic strontium provides experimental opportunities not offered by the fermionic isotope. Only bosons allow the creation of Bose-Einstein condensates (BECs) and atom lasers, which are indispensable tools for quantum simulation [11] and promise quantum sensing based on atom interferometry [12, 13]. The clock transition enable the construction of simplified clocks, atom interferometric gravitational-wave antennas, or the outcoupling of an atom laser beam from a steady-state BEC [14]. This transition can be opened by applying a magnetic field [15–18], but this technique only yields small Rabi frequencies unless one uses impractically high magnetic fields or light intensities. Instead, we implement a three-photon Raman transfer scheme [19, 20] based on a system of four levels: the ground state ^{1}S$_0$, clock state ^{3}P$_0$, and two intermediate states, ^{3}P$_1$ and ^{3}S$_1$ [Fig. 1(a)].

Here we demonstrate a coherent three-photon Raman transfer of Sr atoms on the clock transition. First, using a ^{84}Sr BEC as a starting point, we observe Rabi oscillations between the ground state ^{1}S$_0$ and the excited clock state ^{3}P$_0$. Second, we use the same scheme to demonstrate Stimulated Raman Adiabatic Passage (STIRAP), overcoming its usual limitation to odd level numbers [21]. Third, in a thermal gas, we measure the two-body loss coefficient for collisions of clock-state atoms.

Throughout this work we either use a pure BEC or a thermal gas of ^{84}Sr. Briefly, we load atoms from a red Sr magneto-optical trap (MOT) into a crossed optical dipole trap, extinguish the MOT, and perform evaporative cooling [14, 22]. The dipole trap consists of a horizontally-propagating elliptical reservoir beam with waists 120 μm horizontally and 14.5 μm vertically, and a vertically-propagating dimple trap with a beam waist of 27 μm [Fig. 1(b)]. Both use 1070-nm light. We obtain pure BECs of about 10^5 atoms. When a μK-level thermal gas is needed, we stop evaporation early.

For our three-photon Raman scheme [Fig. 1(a)] it is critical that we maintain coherence between the three lasers driving it. We generate the 689-nm light for the ^{1}S$_0$-^{3}P$_1$ transition using an injection-locked diode laser, which amplifies light from our MOT laser. The MOT laser has a full width at half-maximum of approximately 1.5 kHz after locking to a piezo cavity. We stabilize the frequency of this laser to better than 0.5 kHz by locking the cavity length using saturated-absorption spectroscopy [23]. We produce the 688-nm beam for the ^{3}P$_1$-^{3}S$_1$ transition using a diode laser whose low output power of 2.5 mW is then increased to 13 mW using an injection-locked laser. We generate the 679-nm beam for the downward ^{3}S$_1$-^{3}P$_0$ transition using a diode laser that delivers

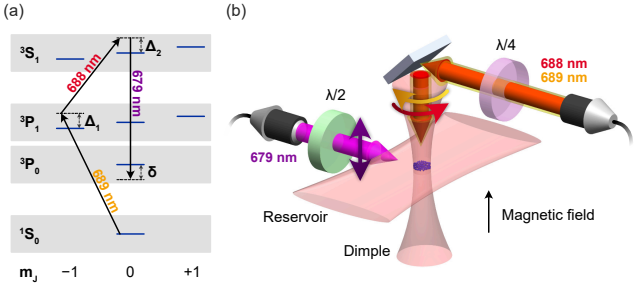


Fig. 1. (a) Levels and transitions relevant for three-photon transfer. We add a non-zero magnetic field to lift the degeneracy between m_J sub-levels. By controlling the polarizations of the beams, we drive the three-photon transfer through specific sub-levels that avoid destructive interferences between potential transfer paths. Δ_1: one-photon detuning for 689-nm. $\Delta_2 - \Delta_1$: one-photon detuning for 688-nm. δ: three-photon detuning. (b) Geometry of dipole traps and three-photon transfer beams. Colored arrows denote photon polarizations.