
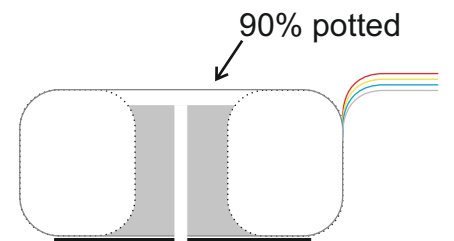
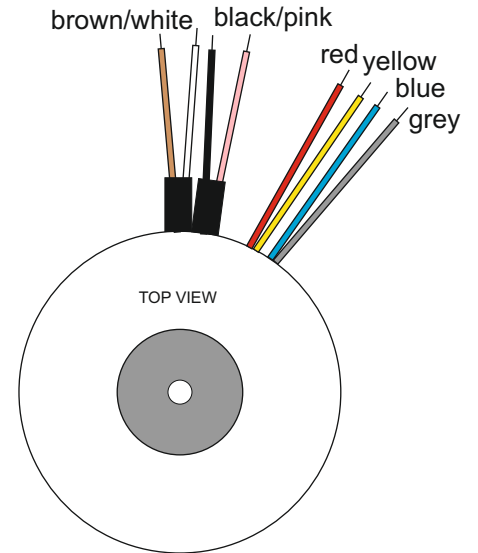
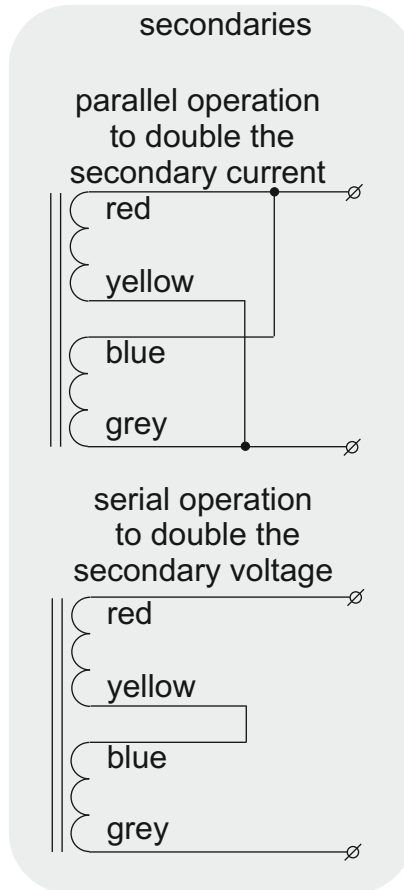
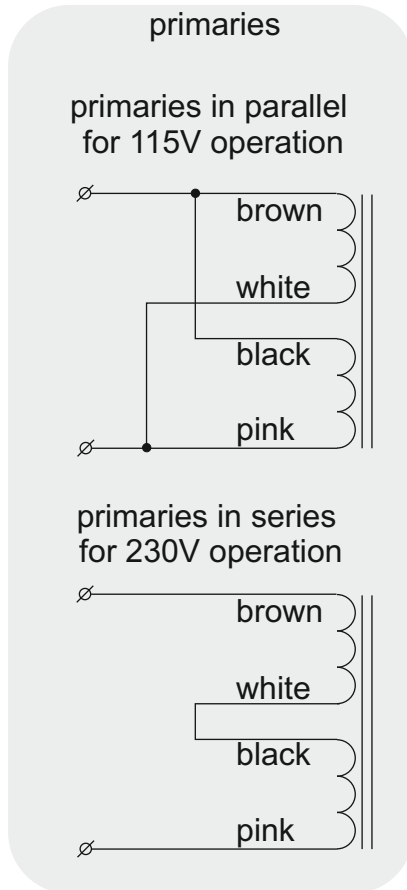


Toroidal transformer type 8N1787P

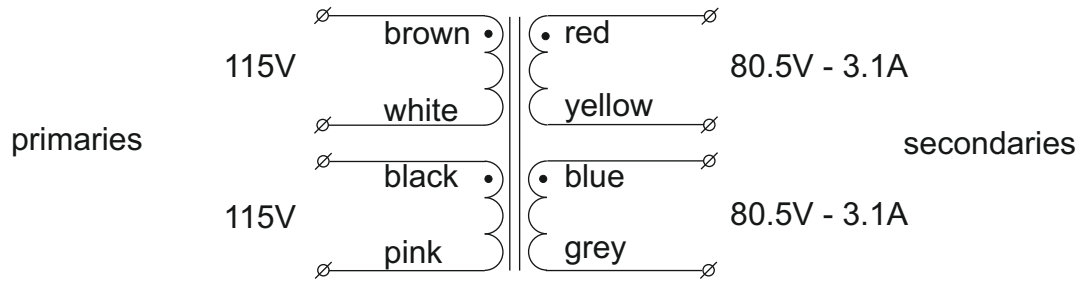

Diameter 135mm
 Height 63mm
 Weight 4.2kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long


Center potted with 8.5mm mounting hole.

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 For 230V use: primary: 2.5A, 5x20mm, IEC127, high I²t value in series with two NTC-resistors type NTC5
 secondary: none
 For 115V use: primary: 5A, 5x20mm, IEC127, high I²t value in series with 2 NTC-resistors type NTC2.5
 secondary: none

Type number	primary	secondaries voltage	current
8N1787P	2x115V	2x 80.5V	3.1A

All voltages are under full ohmic load.
 Regulation : 4.5%

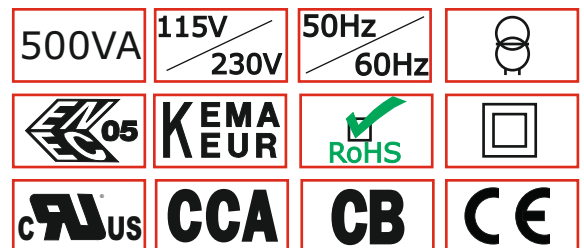

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	May 2011	8N1787P
	P O - B o x 27 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457			
	info@amplimo.nl http://www.amplimo.nl			toroidal transformer 500VA for 115V or 230V operation
	© Copyright Amplimo BV			