




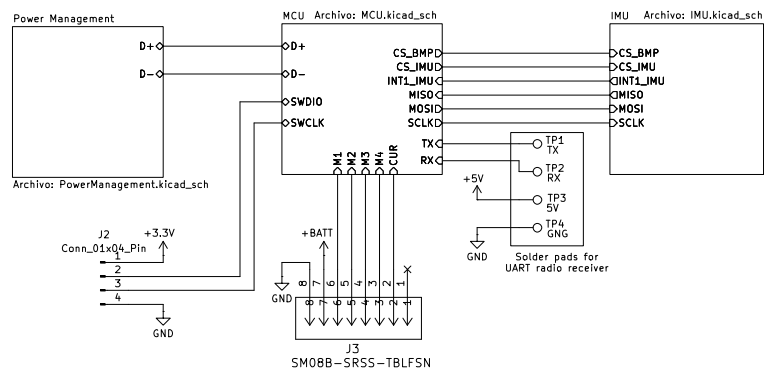


VBATT – 5V BUCK Converter

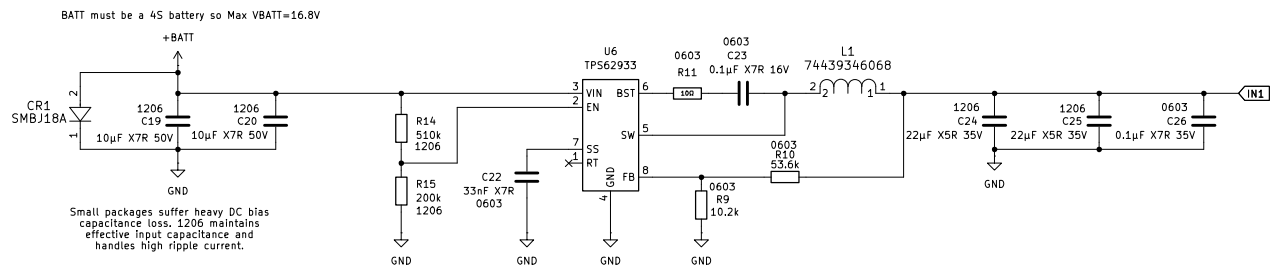


USB C Input

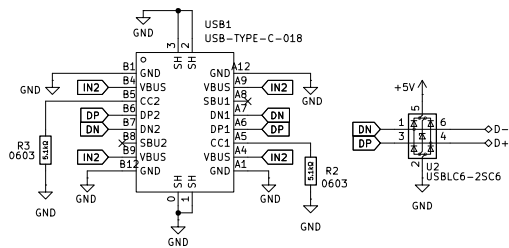

Autoswitching Power MUX

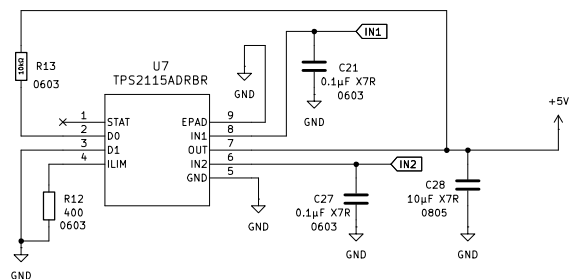

5V-3.3V Regulator

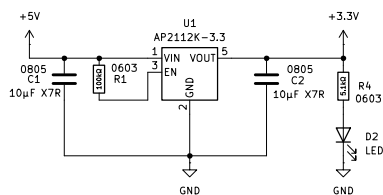

According to section 3.3 of AN2867
 $CL = (CL1 + CL2) / (CL1 * CL2) + C_s$
 $CL = 12pF$ according to datasheet
 Estimated PCB Stray Capacitance:
 $C_s = 5pF$
 $C = 2(CL - C_s)$
 $C = 2(12pF - 5pF)$
 $C = 14pF$

