



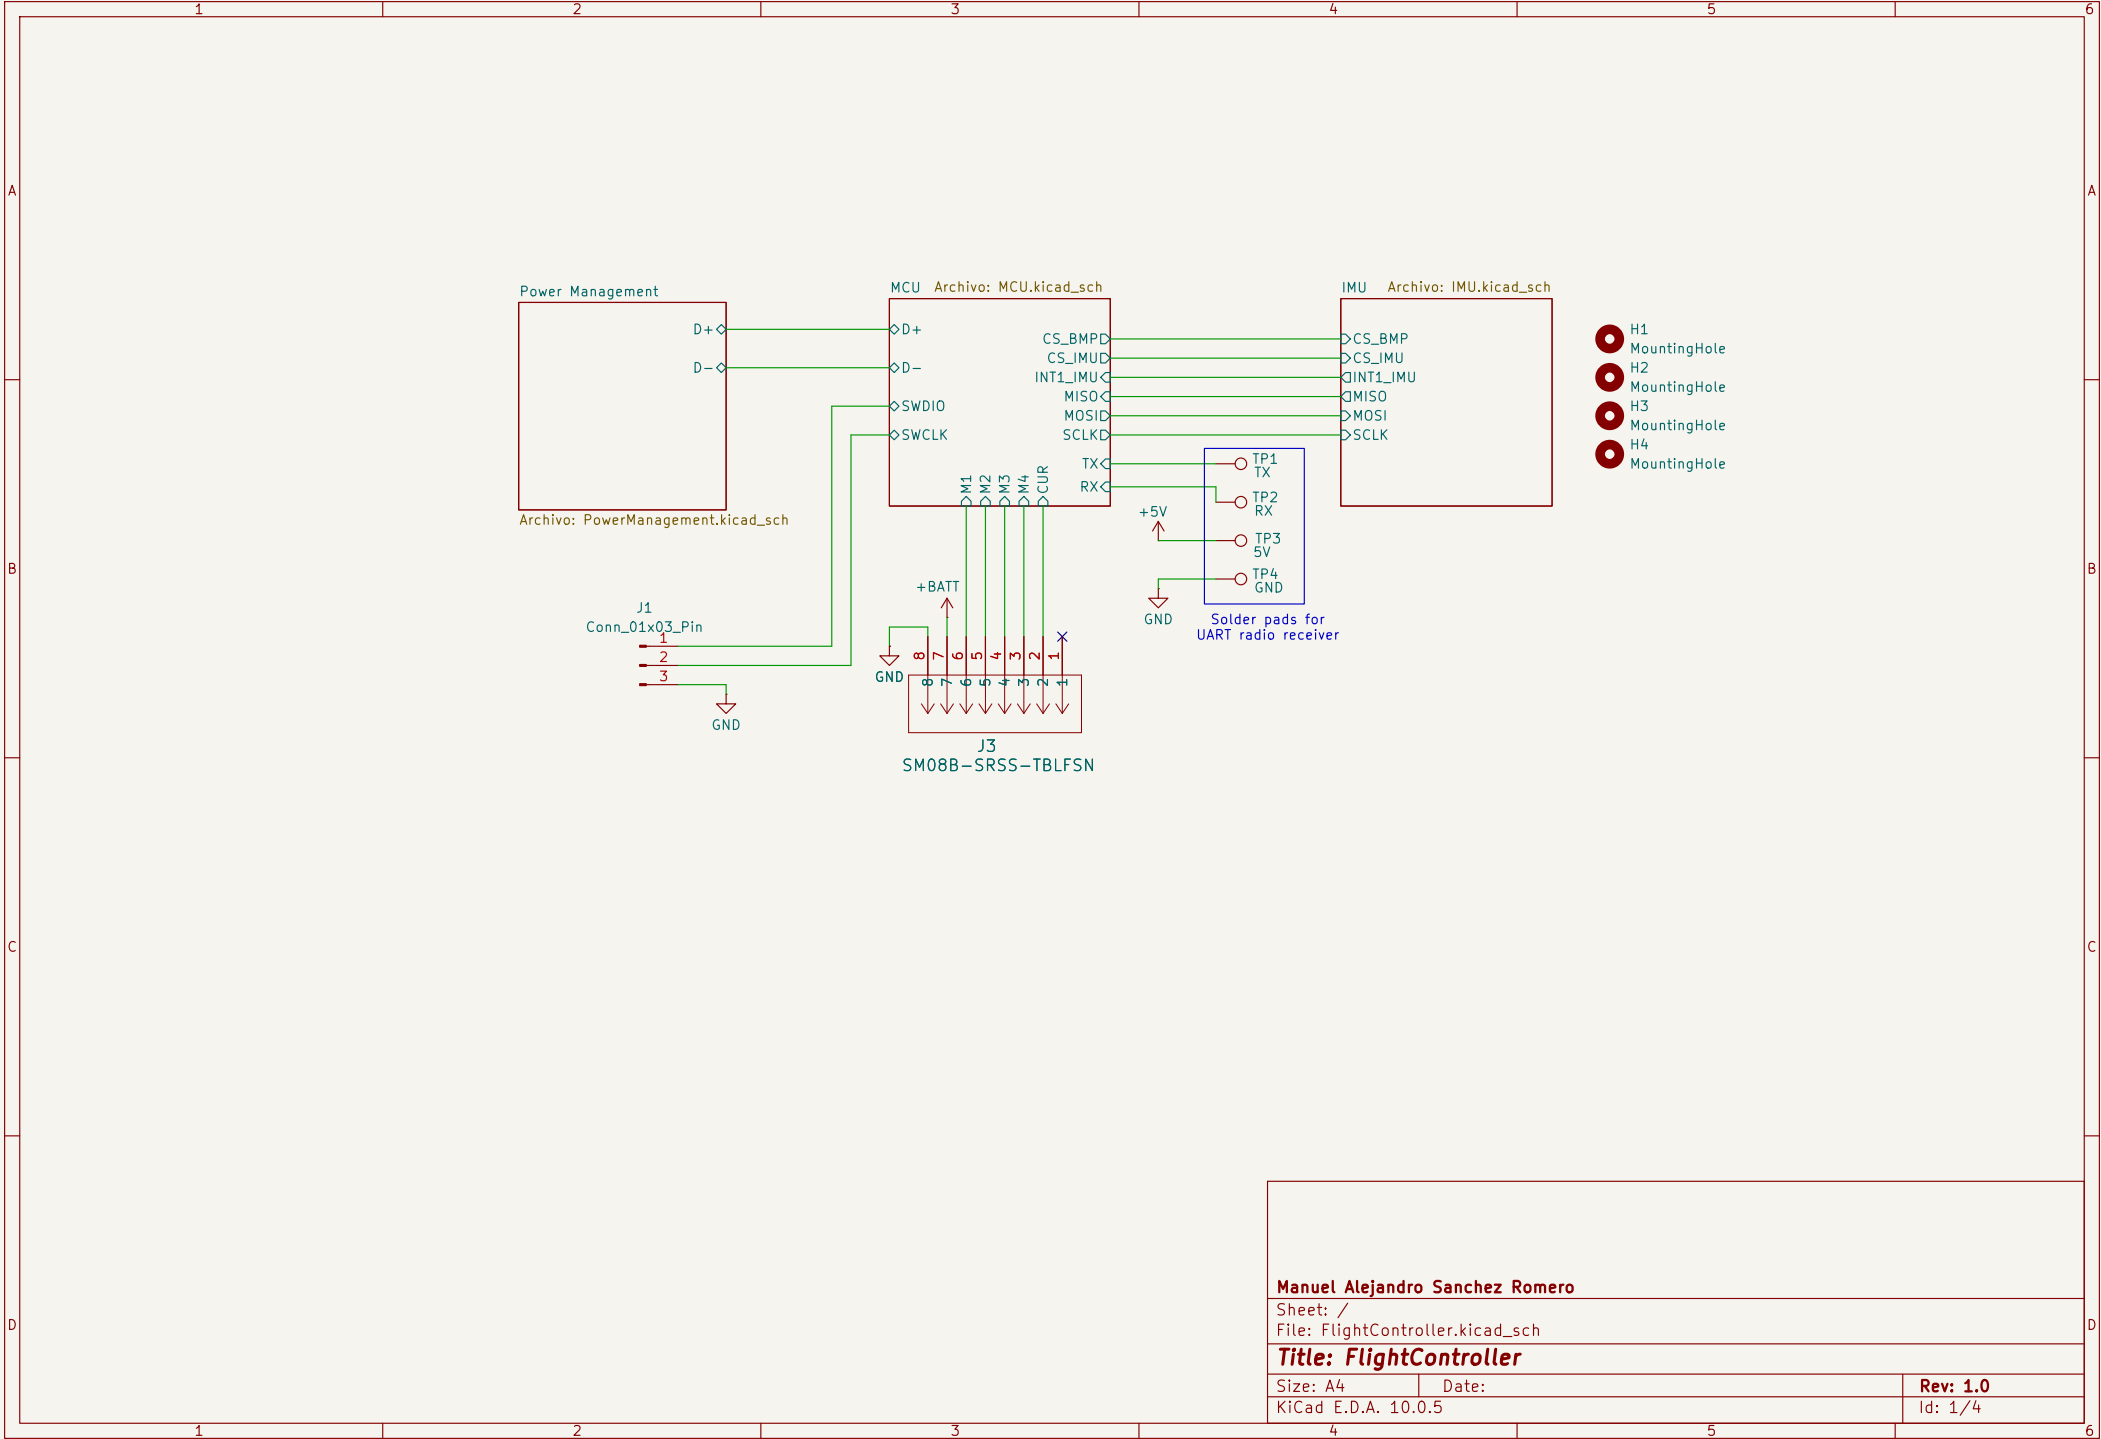


VBATT – 5V BUCK Converter


BATT must be a 4S battery so Max VBATT=16.8V

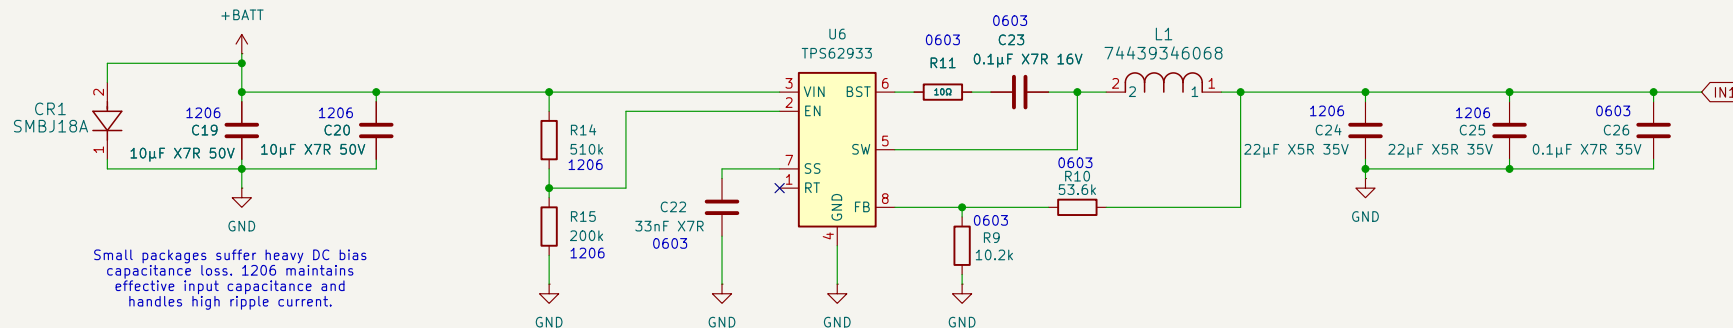


USB C Input

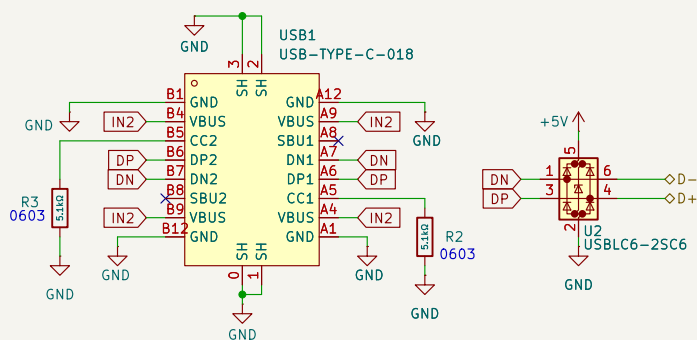

Autoswitching Power MUX

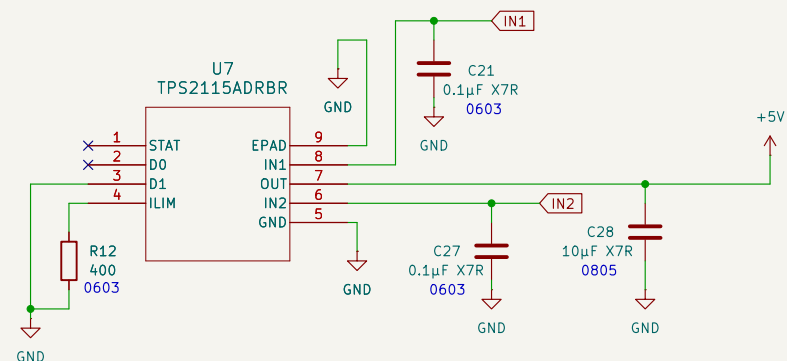

5V-3.3V Regulator

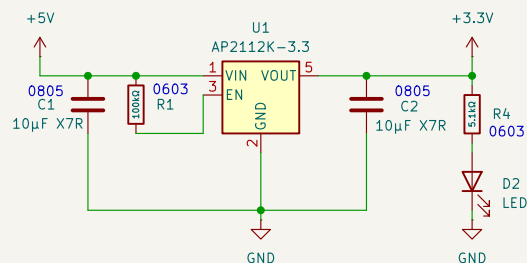

Manuel Alejandro Sanchez Romero

Sheet: /Power Management/

File: PowerManagement.kicad_sch

Title: PowerManagementCircuit

Size: A4



Date:

KiCad E.D.A. 10.0.5

Rev: 1.0

Id: 2/4

According to section 3.3 of AN2867
 $CL = (CL1 + CL2) / (CL1 * CL2) + C_s$
 $CL = 12pF$ according to datasheet
 Estimated PCB Stray Capacitance:
 $C_s = 5pF$
 $C = 2(CL - C_s)$
 $C = 2(12pF - 5pF)$
 $C = 14pF$

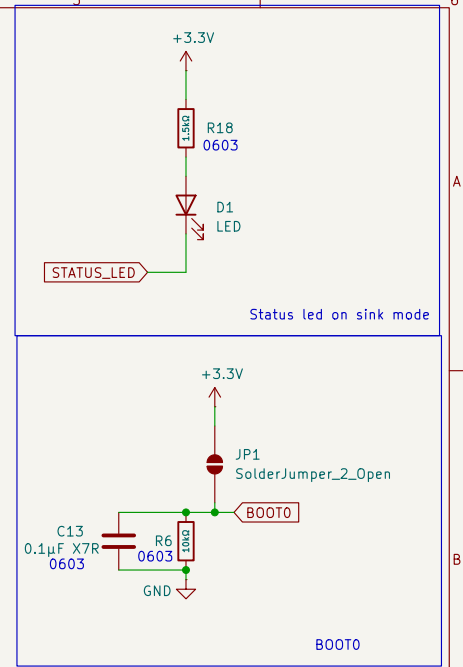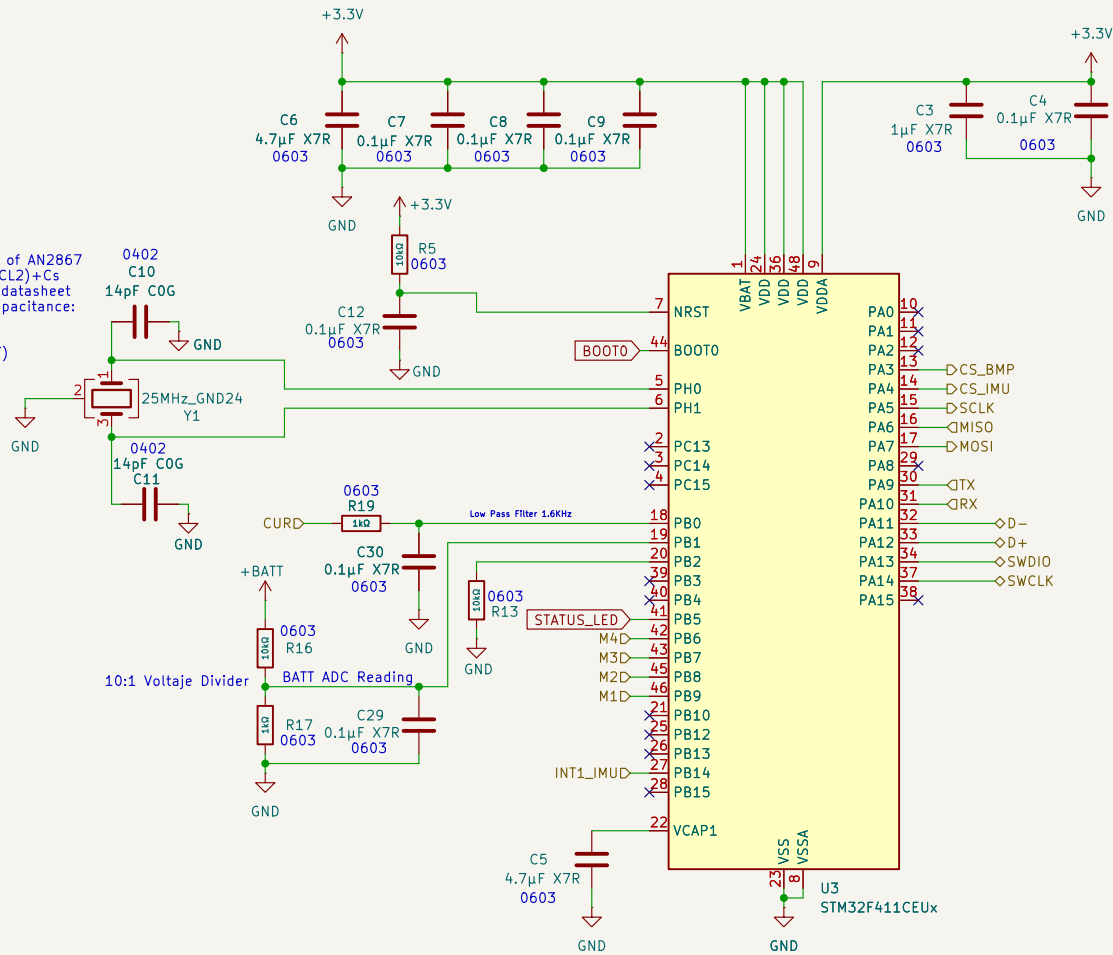

Manuel Alejandro Sanchez Romero

Sheet: /MCU/
 File: MCU.kicad_sch



Title: STM32F411CE Circuit

Size: A4
 KiCad E.D.A. 10.0.5

Date:

Rev: 1.0

Id: 3/4

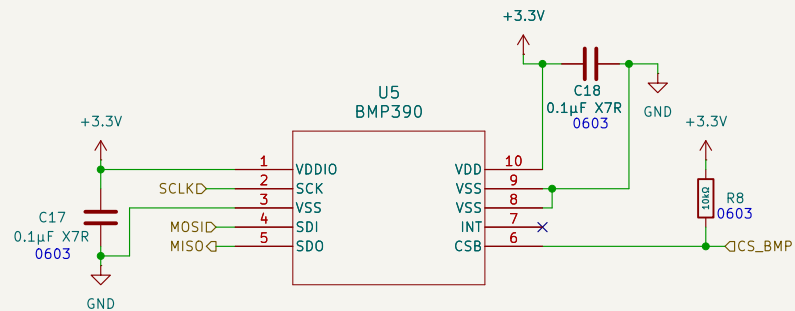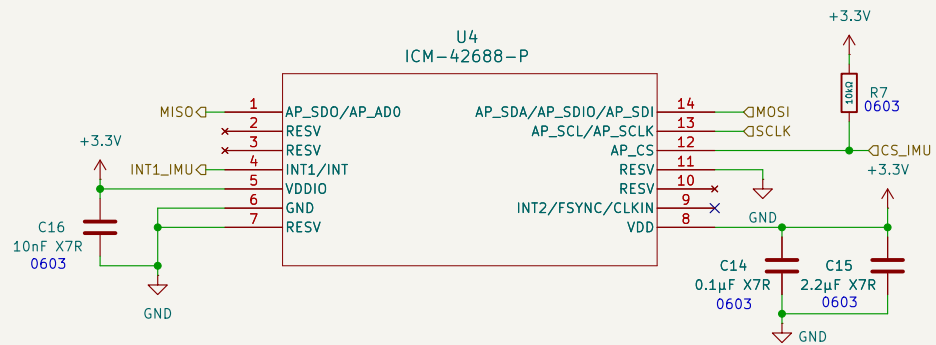

Manuel Alejandro Sanchez Romero

Sheet: /IMU/
File: IMU.kicad_sch

Title: IMU

Size: A4
KiCad E.D.A. 10.0.5

Date:

Rev: 1.0

Id: 4/4