

1. Description

1.1. Project

Project Name	LAB1 EX3
Board Name	custom
Generated with:	STM32CubeMX 6.3.0
Date	09/20/2022


1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C6Ux
MCU Package	UFQFPN48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M3

2. Pinout Configuration

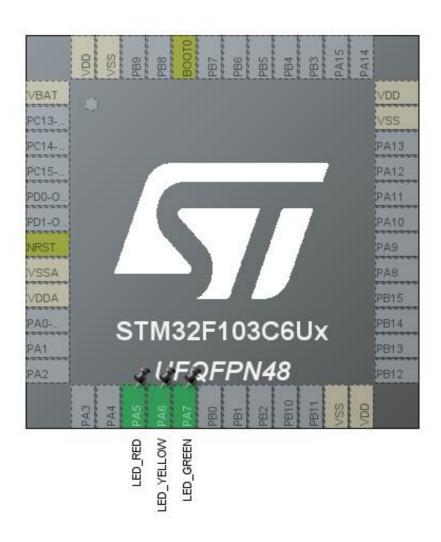


3. Pins Configuration

Pin Number UFQFPN48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
15	PA5 *	I/O	GPIO_Output	LED_RED
16	PA6 *	I/O	GPIO_Output	LED_YELLOW
17	PA7 *	I/O	GPIO_Output	LED_GREEN
23	VSS	Power		
24	VDD	Power		
35	VSS	Power		
36	VDD	Power		
44	воото	Boot		
47	VSS	Power		
48	VDD	Power		

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

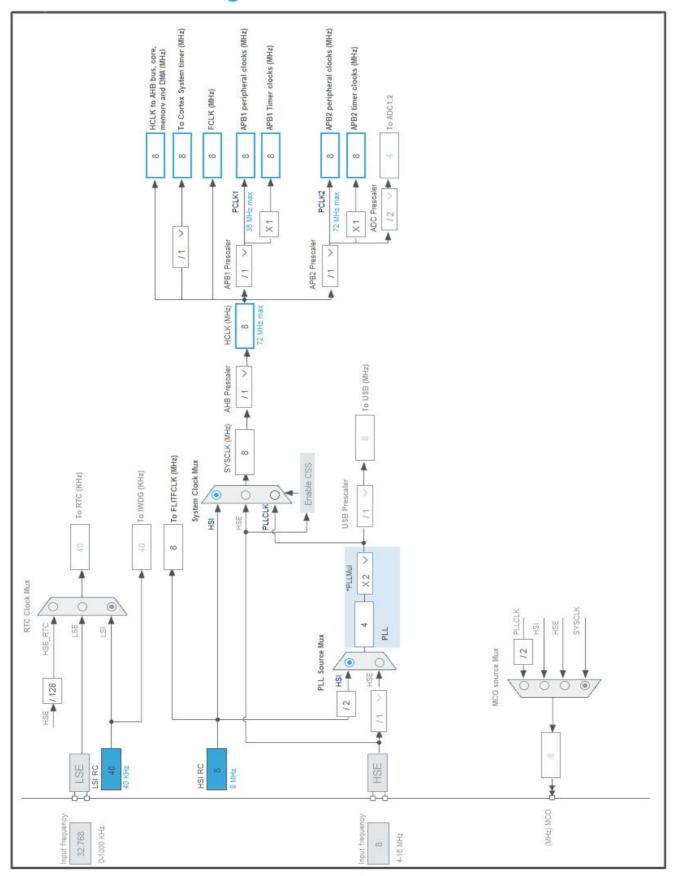

5. Software Project

5.1. Project Settings

Name	Value	
Project Name	LAB1 EX3	
Project Folder	C:\Users\84967\STM32CubeIDE\workspace_1.7.0\KHANH\LAB1 EX3	
Toolchain / IDE	STM32CubeIDE	
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.4	
Application Structure	Advanced	
Generate Under Root	Yes	
Do not generate the main()	No	
Minimum Heap Size	0x200	
Minimum Stack Size	0x400	

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX GPIO Init	GPIO

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C6Ux
Datasheet	DS5936_Rev7

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	24.5 mA	11.7 µA
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Та Мах	102.41	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	2.46 mA
Battery Life	1 month, 27 days,	Average DMIPS	61.0 DMIPS
	1 hour	_	

6.6. Chart

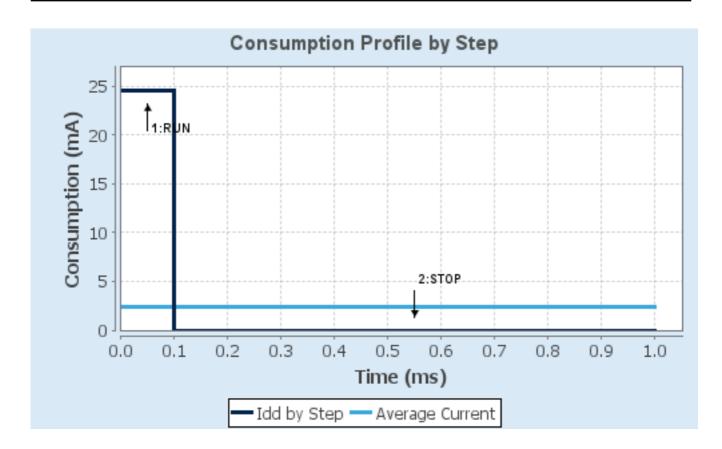

7. Peripherals and Middlewares Configuration

7.1. RCC

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Prefetch Buffer Enabled

Flash Latency(WS) 0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

7.2. SYS

Debug: No Debug

Timebase Source: SysTick

^{*} User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
GPIO	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_RED
	PA6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_YELLOW
	PA7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_GREEN

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority	
Non maskable interrupt	true	0	0	
Hard fault interrupt	true	0	0	
Memory management fault	true	0	0	
Prefetch fault, memory access fault	true	0	0	
Undefined instruction or illegal state	true	0	0	
System service call via SWI instruction	true	0	0	
Debug monitor	true	0	0	
Pendable request for system service	true	0	0	
System tick timer	true	15	0	
PVD interrupt through EXTI line 16	unused			
Flash global interrupt	unused			
RCC global interrupt	unused			

8.3.2. NVIC Code generation


Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
	sequence ordering	handler	
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

^{*} User modified value

9. System Views

9.1. Category view

9.1.1. Current

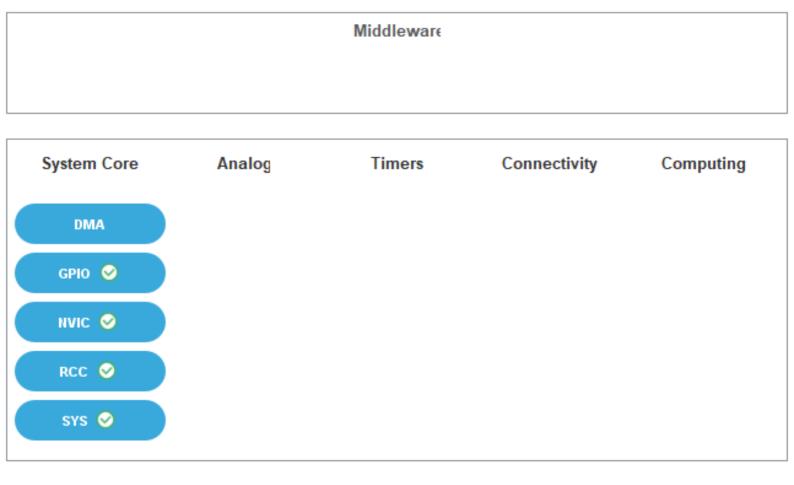

10. Docs & Resources

Type Link

Datasheet http://www.st.com/resource/en/datasheet/CD00210843.pdf

Reference http://www.st.com/resource/en/reference_manual/CD00171190.pdf

manual

Programming http://www.st.com/resource/en/programming manual/CD00228163.pdf

manual

Programming http://www.st.com/resource/en/programming_manual/CD00283419.pdf

manual

Errata sheet http://www.st.com/resource/en/errata_sheet/CD00211391.pdf

Application note http://www.st.com/resource/en/application_note/CD00160362.pdf

Application note http://www.st.com/resource/en/application_note/CD00164185.pdf

Application note http://www.st.com/resource/en/application_note/CD00167326.pdf

Application note http://www.st.com/resource/en/application_note/CD00167594.pdf

Application note http://www.st.com/resource/en/application_note/CD00211314.pdf

Application note http://www.st.com/resource/en/application_note/CD00249778.pdf

Application note http://www.st.com/resource/en/application_note/CD00259245.pdf

Application note http://www.st.com/resource/en/application_note/CD00264321.pdf

Application note http://www.st.com/resource/en/application_note/CD00264342.pdf

Application note http://www.st.com/resource/en/application_note/CD00264379.pdf

Application note http://www.st.com/resource/en/application_note/DM00024853.pdf

Application note http://www.st.com/resource/en/application_note/DM00032987.pdf

Application note http://www.st.com/resource/en/application_note/DM00033267.pdf

Application note http://www.st.com/resource/en/application_note/DM00033344.pdf

Application note http://www.st.com/resource/en/application_note/DM00042534.pdf

Application note http://www.st.com/resource/en/application_note/DM00052530.pdf

Application note http://www.st.com/resource/en/application_note/DM00073742.pdf

Application note http://www.st.com/resource/en/application_note/DM00080497.pdf

Application note http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note http://www.st.com/resource/en/application_note/DM00156964.pdf http://www.st.com/resource/en/application_note/DM00160482.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00209695.pdf Application note http://www.st.com/resource/en/application_note/DM00220769.pdf http://www.st.com/resource/en/application_note/DM00236305.pdf Application note http://www.st.com/resource/en/application_note/DM00257177.pdf Application note http://www.st.com/resource/en/application note/DM00272912.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00296349.pdf Application note http://www.st.com/resource/en/application note/DM00315319.pdf Application note http://www.st.com/resource/en/application note/DM00325582.pdf Application note http://www.st.com/resource/en/application_note/DM00327191.pdf Application note http://www.st.com/resource/en/application_note/DM00354244.pdf Application note http://www.st.com/resource/en/application_note/DM00380469.pdf Application note http://www.st.com/resource/en/application_note/DM00395696.pdf http://www.st.com/resource/en/application_note/DM00493651.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00536349.pdf Application note http://www.st.com/resource/en/application_note/DM00725181.pdf