
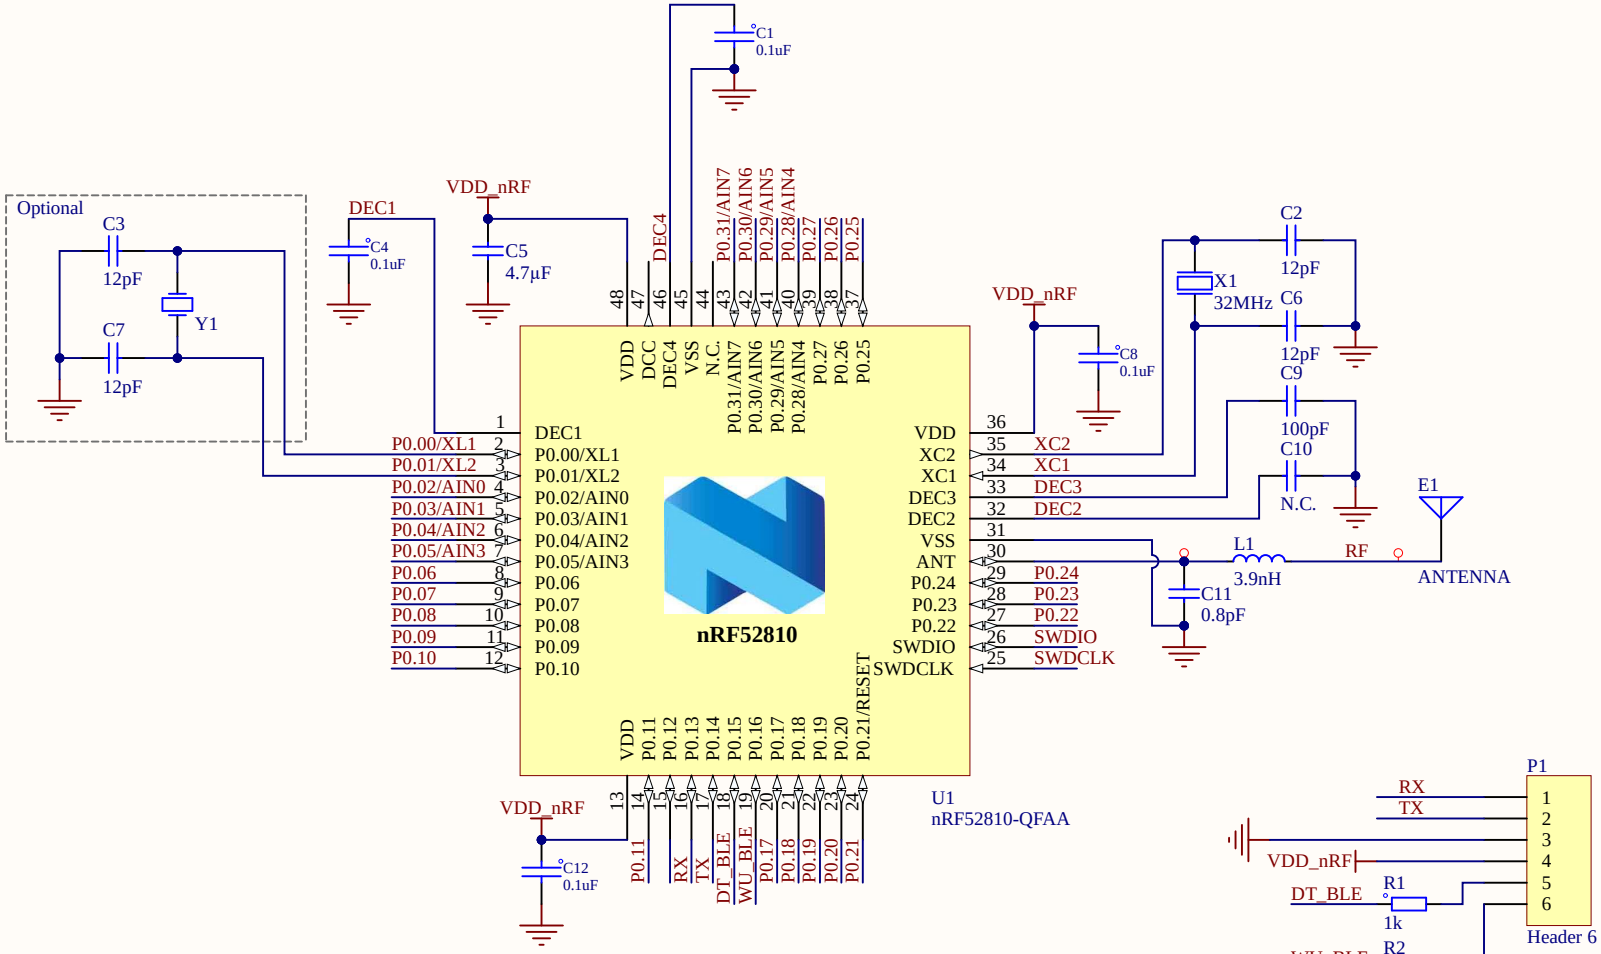


Title		
Size: A	Number	Revision
Date: 9/15/2025		Sheet of
File: E:\project\..\NRF52810.SchDoc		Drawn By:

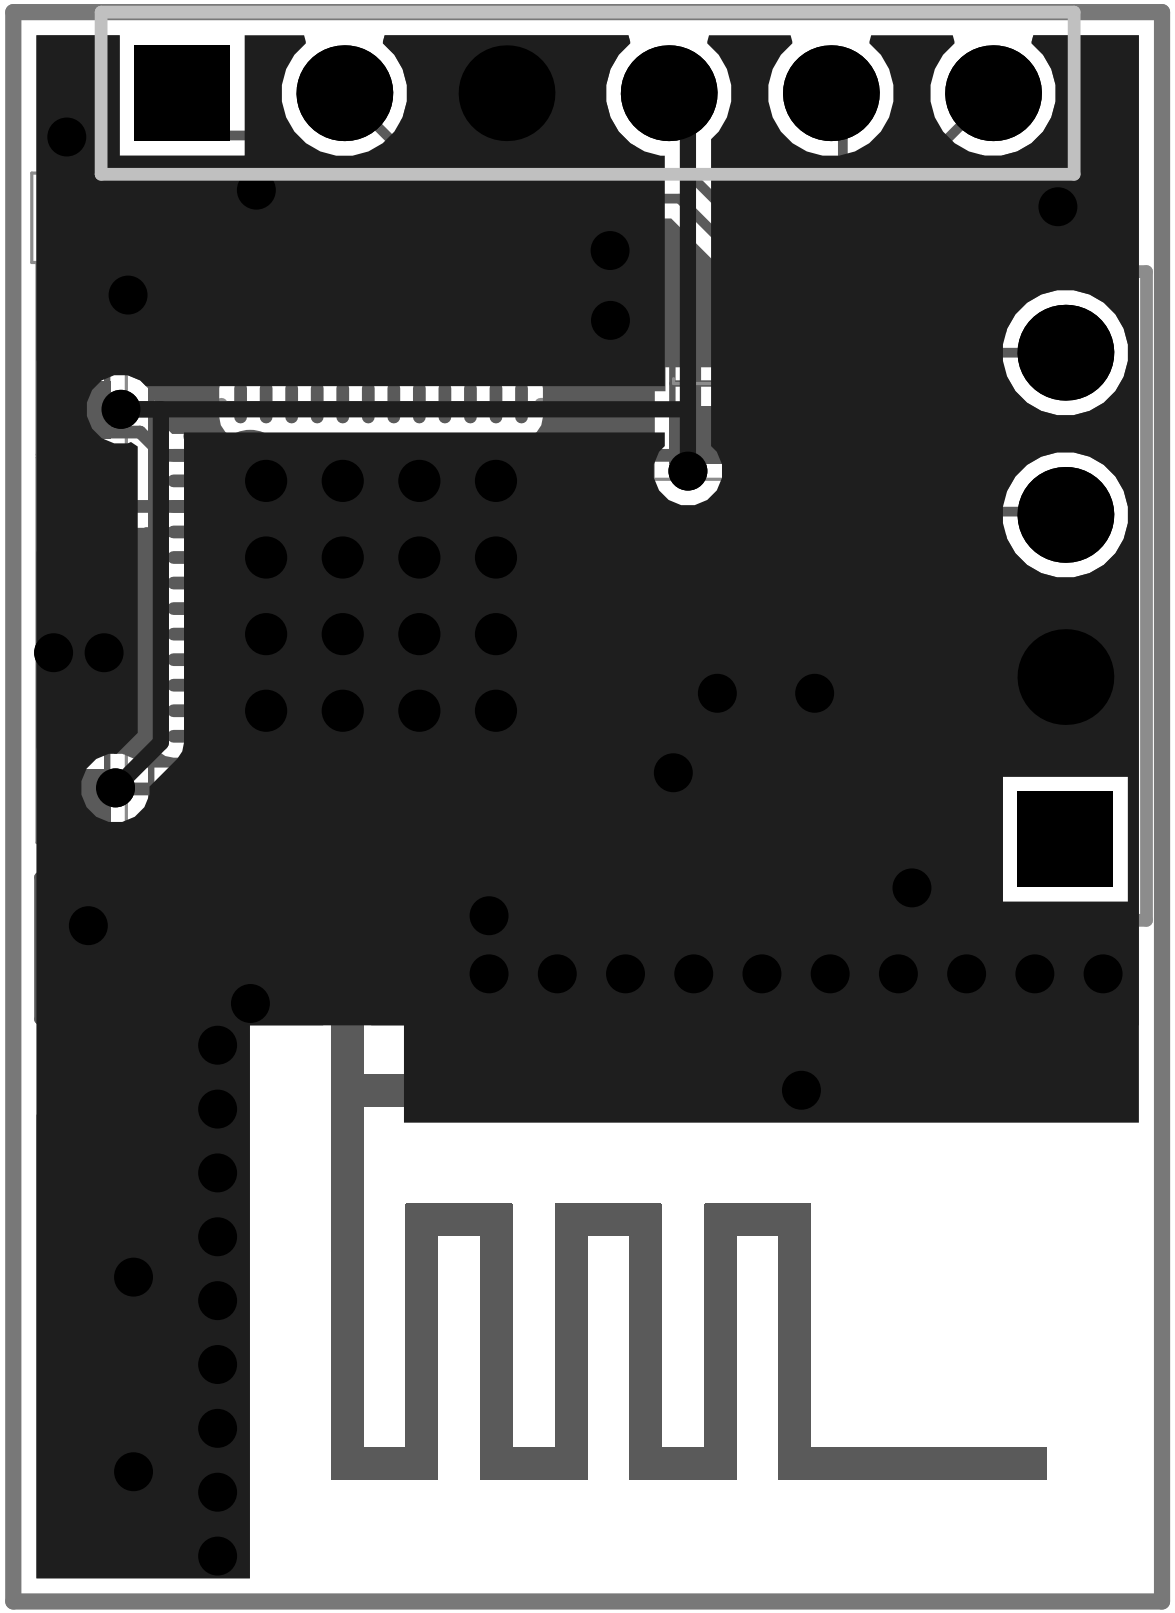

Comment	Manufacturer Part Number	Description	Designator	Footprint	LibRef	Quantity
0.1uF	GMC10X7R104K50NT	Cap SMT Cer .1UF 50V 10% 0603 4K/TR	C1, C4, C8, C12	C0603	C0.1uF-0805	4
12pF		Capacitor, NP0, ±2%	C2, C3, C6, C7	CAPC1005X04L	C0402-12p	4
4.7µF		Capacitor, X5R, ±10%	C5	C0603	C0603-4µ7	1
100pF		Capacitor, NP0, ±5%	C9	CAPC1005X04L	C0402-100p	1
N.C.		Not mounted	C10	CAPC1005X04L	C0402-N.C.	1
0.8pF		Capacitor, NP0, ±5%	C11	CAPC1005X04L	C0402-0.8p	1
ANTENNA		Generic Antenna	E1	ANTENNA_MIFA 31	ANTENNA	1
3.9nH		High frequency chip inductor ±5%	L1	INDC1005X04L	L0402-3n9	1
Header 6		Header, 6-Pin	P1	HDR1X6	Header 6	1
Header 4		Header, 4-Pin	P2	HDR1X4	Header 4	1
1k	CR0805-8W-102JT	RES SMD 1K OHM 5% 1/8W 0805	R1, R2	R0603	R1k_0805	2
nRF52810-QFAA	nRF52810-QFAABB	Multi-protocol Bluetooth Low Energy, ANT and 2.4GHz proprietary system-on-chip	U1	QFN40P600X600X90-48N	nRF52810-QFAABB	1
32MHz		XTAL SMD 2016, 32MHz, CI=8pF, Total Tol: ±40ppm	X1	BT-XTAL_2016	XTAL_SMD2016_32MHz_8pF_General	1
32.768k	ABS07-32.768KHZ-T	32.768kHz ±20ppm Crystal 12.5pF 70 kOhm -40°C ~ 85°C Surface Mount 2-SMD	Y1	Crytal_32.768kHz ±20ppm	Crystal_Abr_32.768k_12.5pF	1