

## 1. Description


### 1.1. Project

Project Name	pcf8563
Board Name	custom
Generated with:	STM32CubeMX 4.26.0
Date	08/11/2018

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103VETx
MCU Package	LQFP100
MCU Pin number	100

## 2. Pinout Configuration

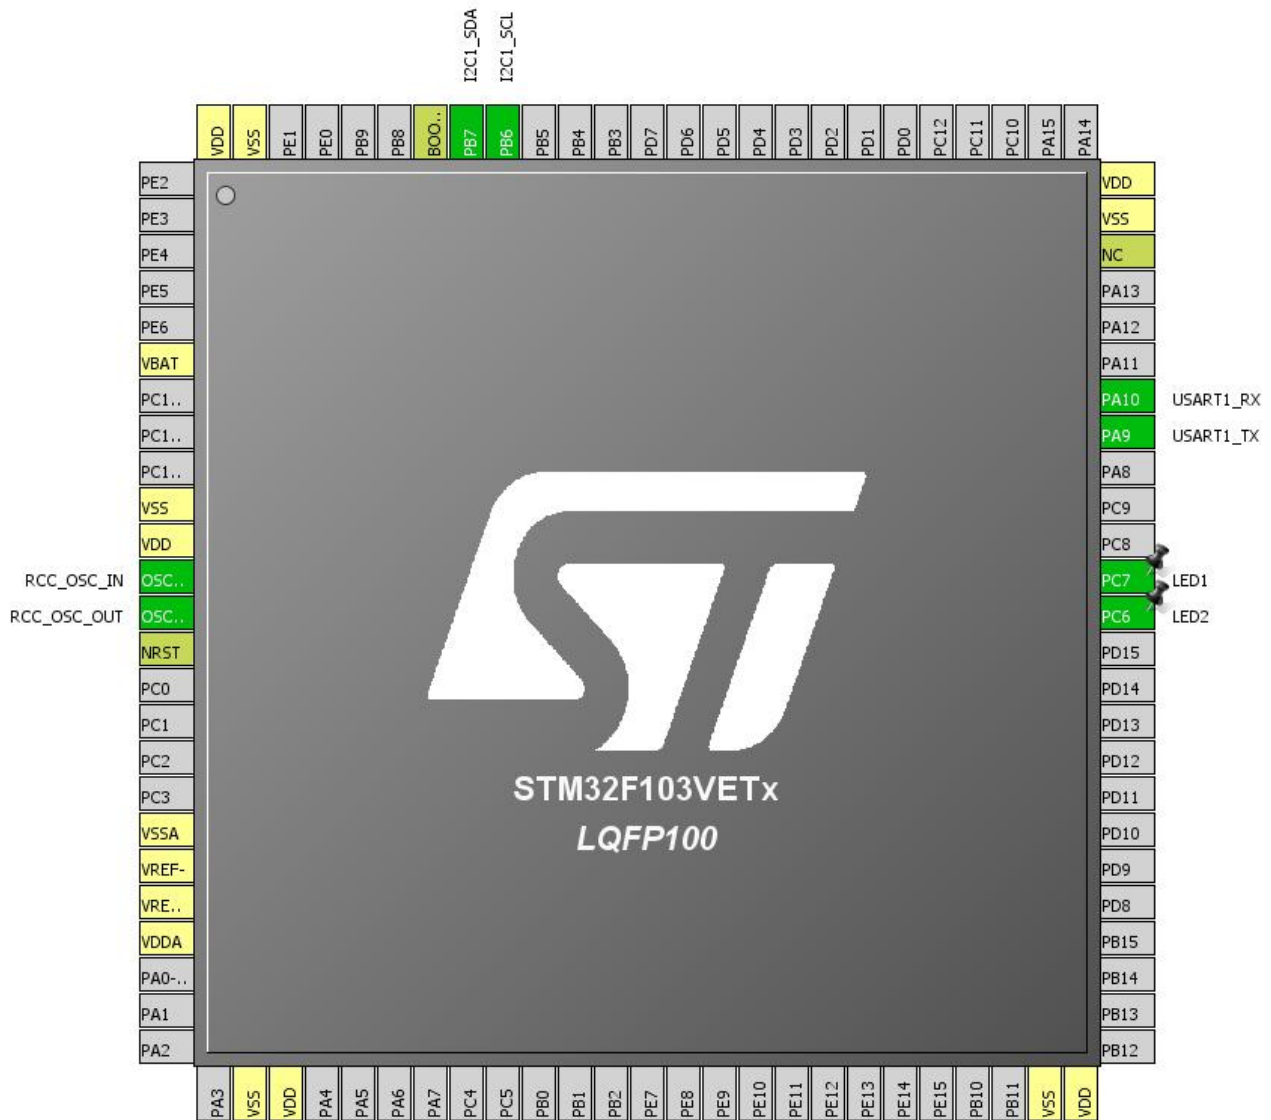


### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	OSC_IN	I/O	RCC_OSC_IN	
13	OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VSSA	Power		
20	VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
27	VSS	Power		
28	VDD	Power		
49	VSS	Power		
50	VDD	Power		
63	PC6 *	I/O	GPIO_Output	LED2
64	PC7 *	I/O	GPIO_Output	LED1
68	PA9	I/O	USART1_TX	
69	PA10	I/O	USART1_RX	
73	NC	NC		
74	VSS	Power		
75	VDD	Power		
92	PB6	I/O	I2C1_SCL	
93	PB7	I/O	I2C1_SDA	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

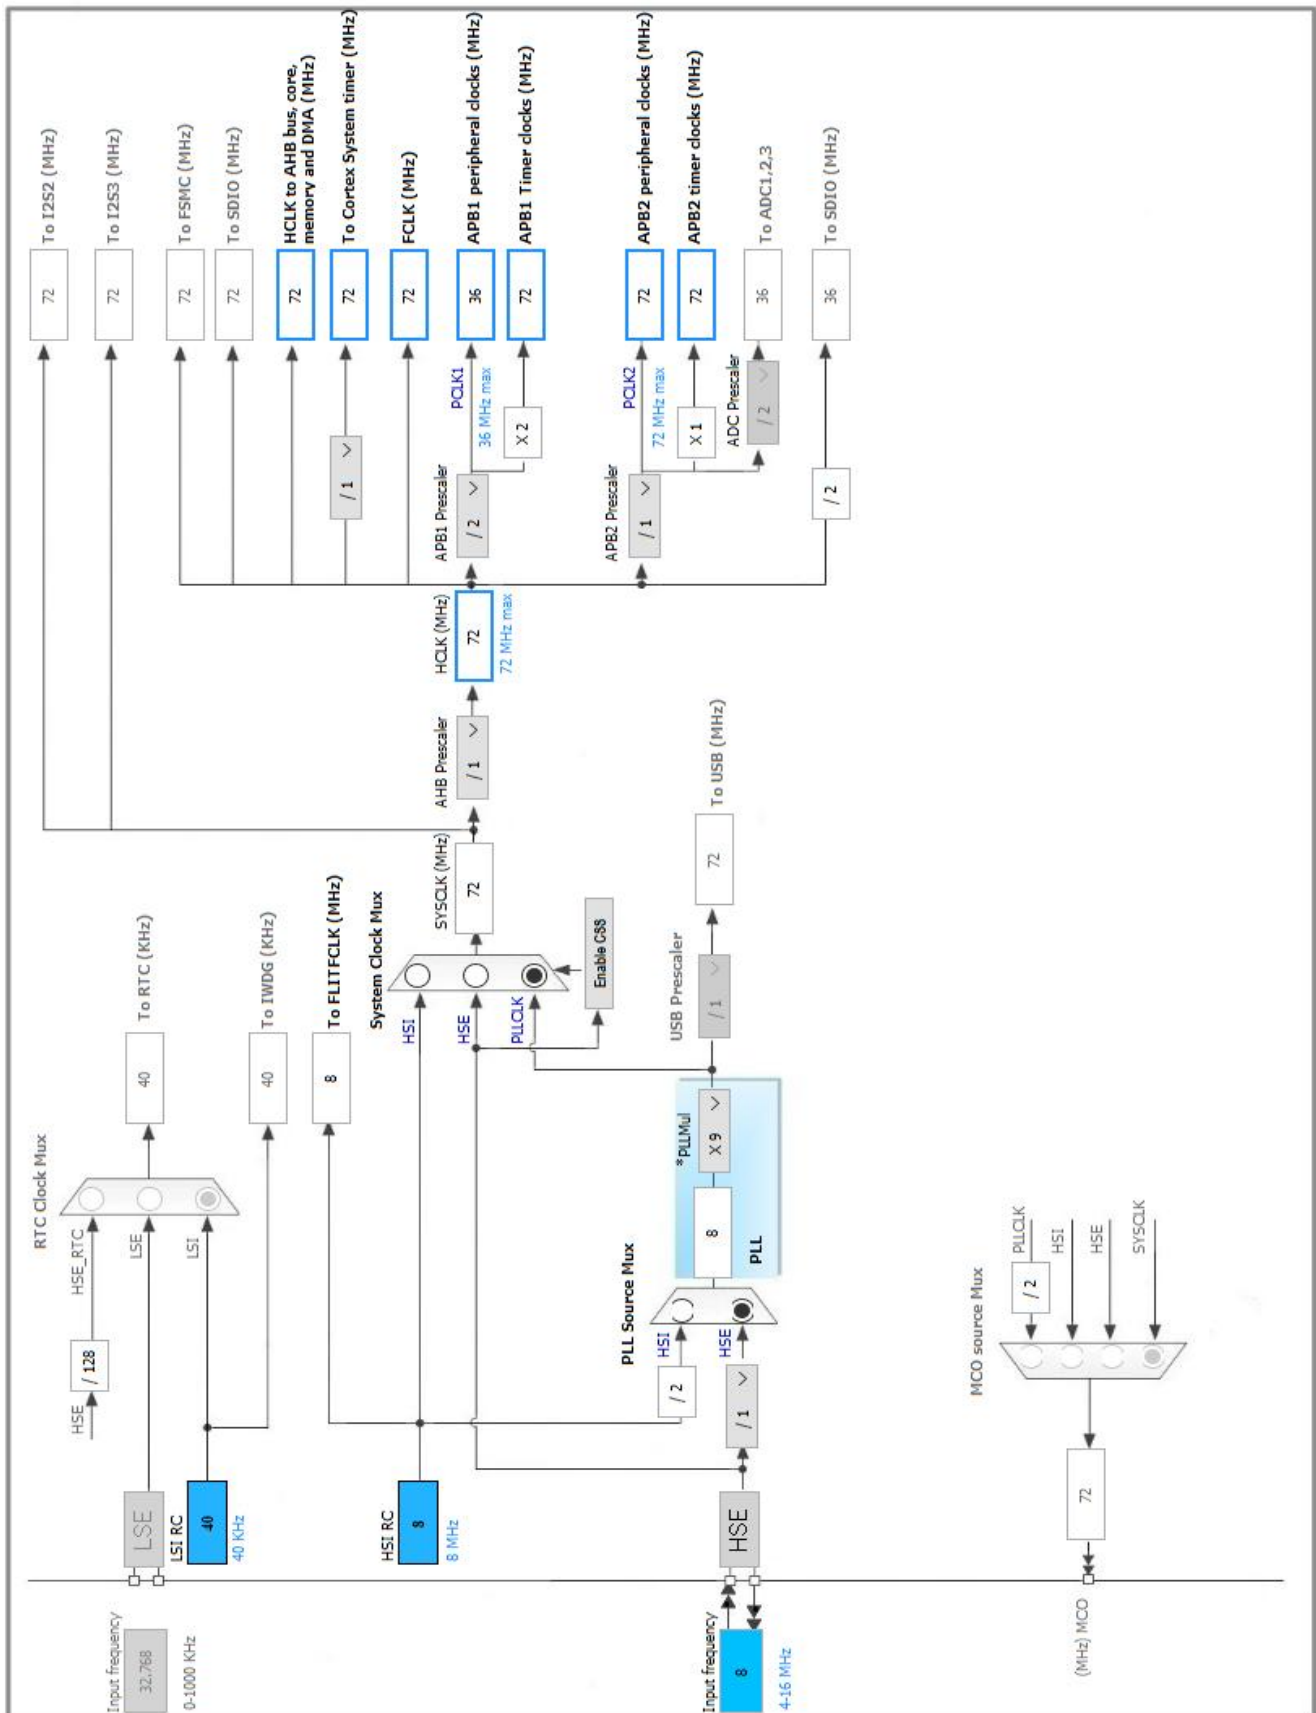

## 5. IPs and Middleware Configuration

### 5.1. I2C1

#### I2C: I2C

##### 5.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 5.2. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.3. SYS

Debug: No Debug

Timebase Source: SysTick

### 5.4. USART1

**Mode: Asynchronous**

**5.4.1. Parameter Settings:**

**Basic Parameters:**

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

**Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	<b>High *</b>	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	<b>High *</b>	
RCC	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	<b>High *</b>	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	<b>n/a</b>	
GPIO	PC6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2
	PC7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART1 global interrupt	unused		

\* User modified value



## 7. Power Consumption Calculator report

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103VETx
Datasheet	14611_Rev12

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	pcf8563
Project Folder	D:\[project]\stm32f103vet6\github\pcf8563
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## ***9. Software Pack Report***