

## 1. Description


### 1.1. Project

Project Name	9g_micro_servo
Board Name	custom
Generated with:	STM32CubeMX 4.26.0
Date	08/10/2018

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103VETx
MCU Package	LQFP100
MCU Pin number	100

## 2. Pinout Configuration

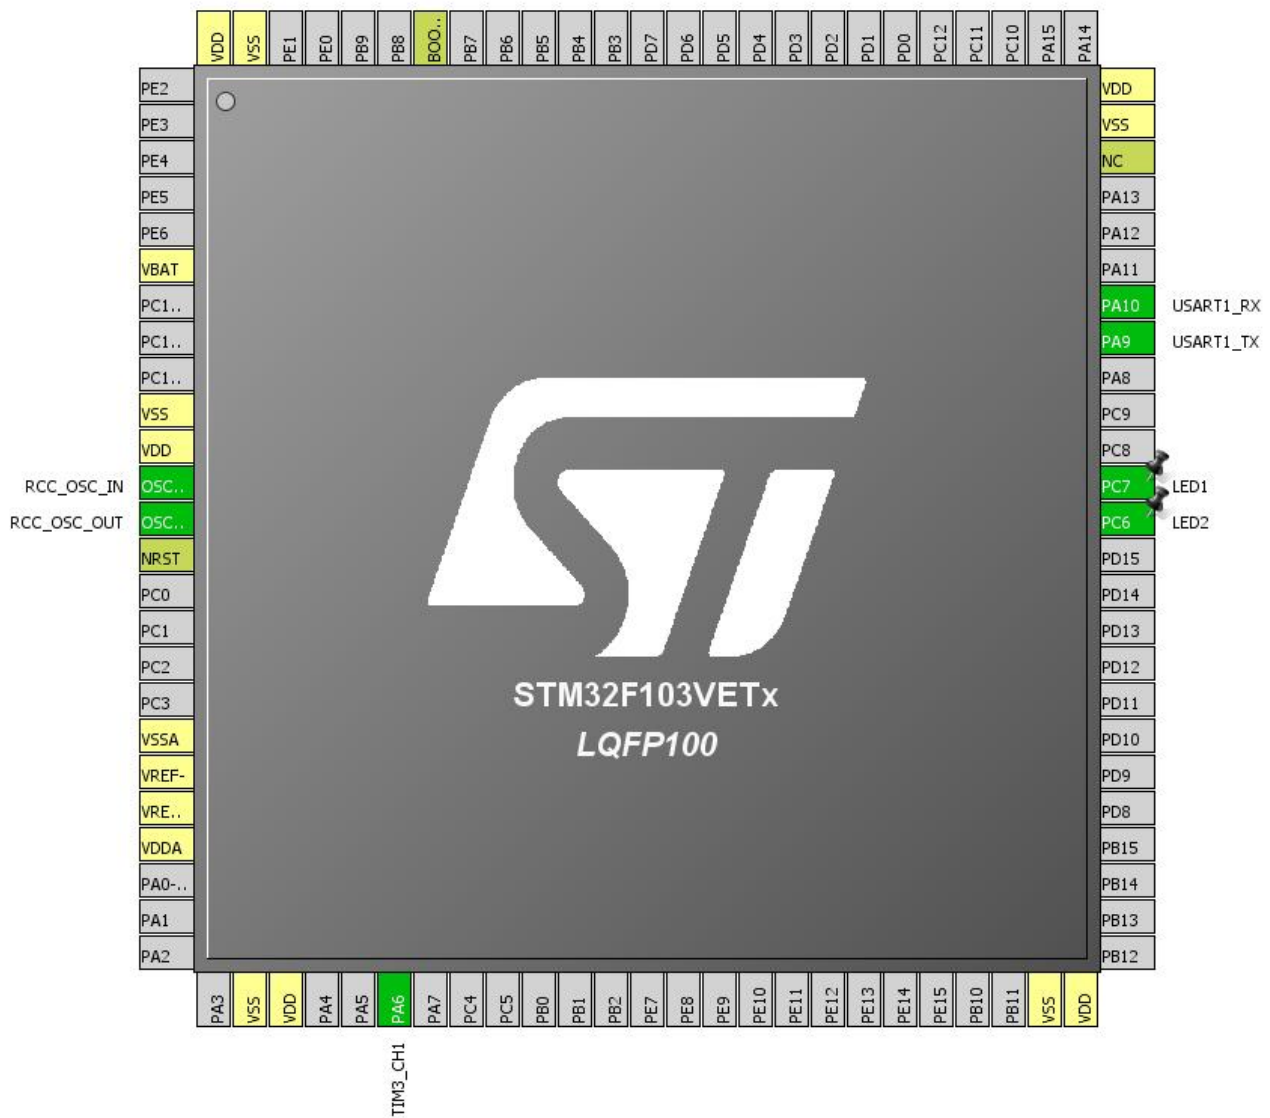


### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	OSC_IN	I/O	RCC_OSC_IN	
13	OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VSSA	Power		
20	VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
27	VSS	Power		
28	VDD	Power		
31	PA6	I/O	TIM3_CH1	
49	VSS	Power		
50	VDD	Power		
63	PC6 *	I/O	GPIO_Output	LED2
64	PC7 *	I/O	GPIO_Output	LED1
68	PA9	I/O	USART1_TX	
69	PA10	I/O	USART1_RX	
73	NC	NC		
74	VSS	Power		
75	VDD	Power		
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

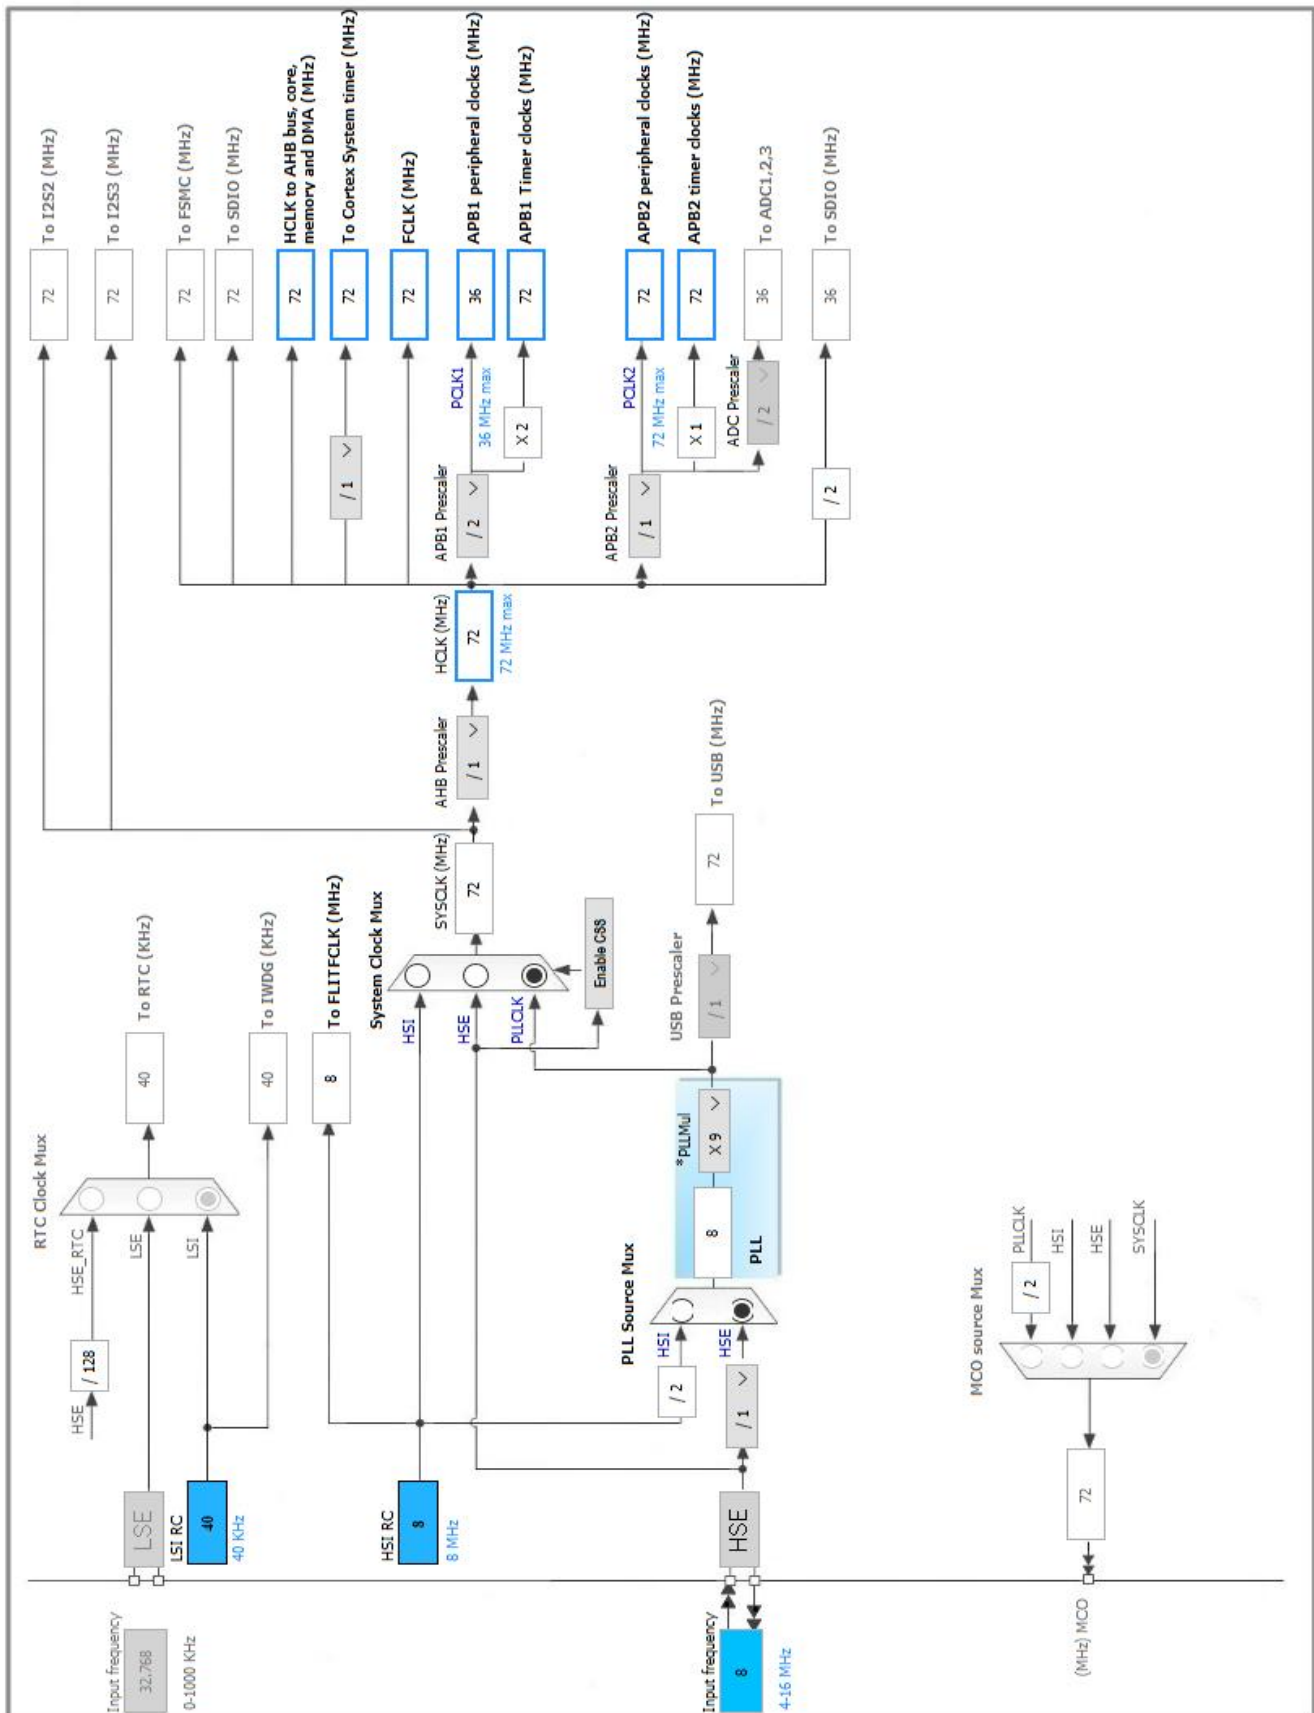

## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.2. SYS

Debug: No Debug

Timebase Source: SysTick

### 5.3. TIM3

Clock Source : Internal Clock

Channel1: PWM Generation CH1

##### 5.3.1. Parameter Settings:

###### Counter Settings:

Prescaler (PSC - 16 bits value)	72-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	20000 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

###### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

###### PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable

CH Polarity

High

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	n/a	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	<b>High *</b>	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	<b>n/a</b>	
GPIO	PC6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2
	PC7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM3 global interrupt	unused		
USART1 global interrupt	unused		

\* User modified value



## **7. Power Consumption Calculator report**

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103VETx
Datasheet	14611_Rev12

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	9g_micro_servo
Project Folder	D:\[project]\stm32f103vet6\github\9g_micro_servo
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## ***9. Software Pack Report***