

Evaluation Statistics

Contents

1 Setup

1.1 Import and Filter Data

Table 1: Entries excluded by timeout, minimum-duration, and dependency filtering.

phase	removal_reason	removed_entries
Phase 5	Elapsed time exceeded configured timeout plus grace period	5
R3	Recovery execution below 10 seconds; treated as not run	2
R4	Elapsed time exceeded configured timeout plus grace period	1
R5	Dependent recovery or stability entry removed with primary phase	3
R5	Recovery execution below 10 seconds; treated as not run	89
SR	Dependent recovery or stability entry removed with primary phase	3

1.2 Theme Settings


2 Success Rates

Table 2: Number of Valid Runs Recorded for Each Evaluation Phase

Phase	Number of runs
Phase 1	236
S1	106
R1	130
Phase 2.1	235
Phase 2.2	234
Phase 3	233
S3	222
R3	9
Phase 4	228
S4	133
R4	94
Phase 5	221
S5	107

Phase	Number of runs
R5	27
SR	238

2.1 Final Outcome by Main Phase

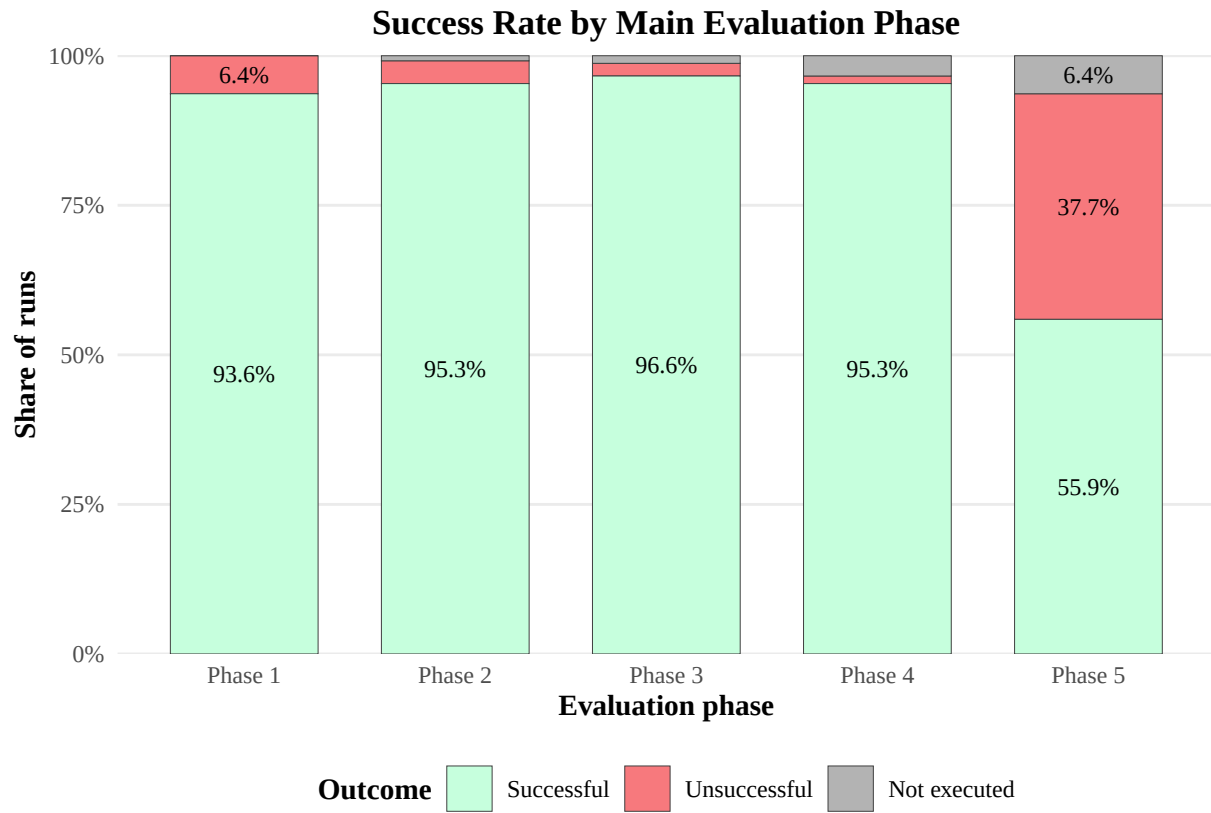

2.2 Direct, Recovered, Failed, and Not-Run Outcomes


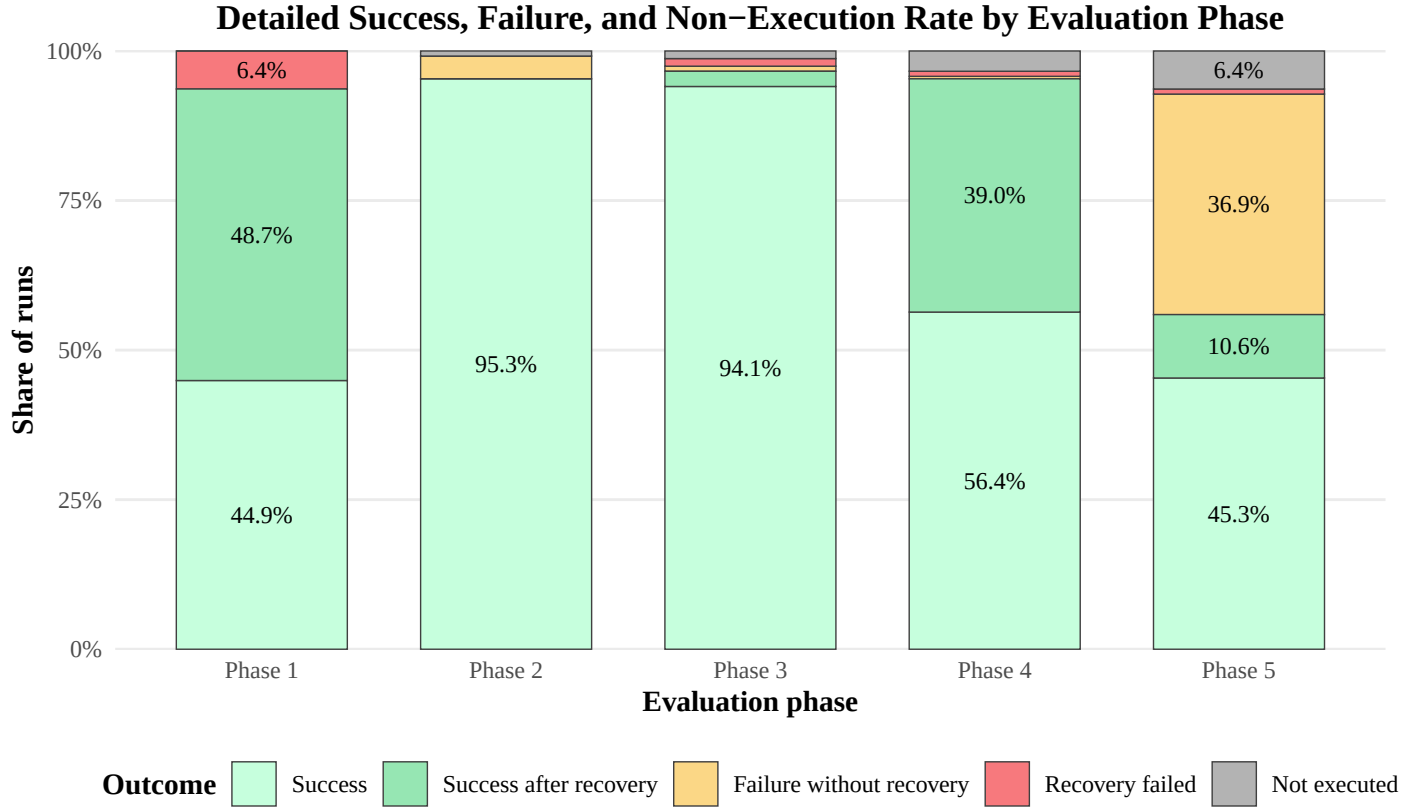


Table 3: Run counts by phase outcome, including phases that were not executed.


phase_group	Failure (no recovery)	Failure (with recovery)	Not run	Success (no recovery)	Success (with recovery)
Phase 1	0	15	0	106	115
Phase 2	9	0	2	225	0
Phase 3	2	3	3	222	6
Phase 4	1	2	8	133	92
Phase 5	87	2	15	107	25

3 Final Success Rate by Input Variables


3.1 Phase 1: Initial Network Formation

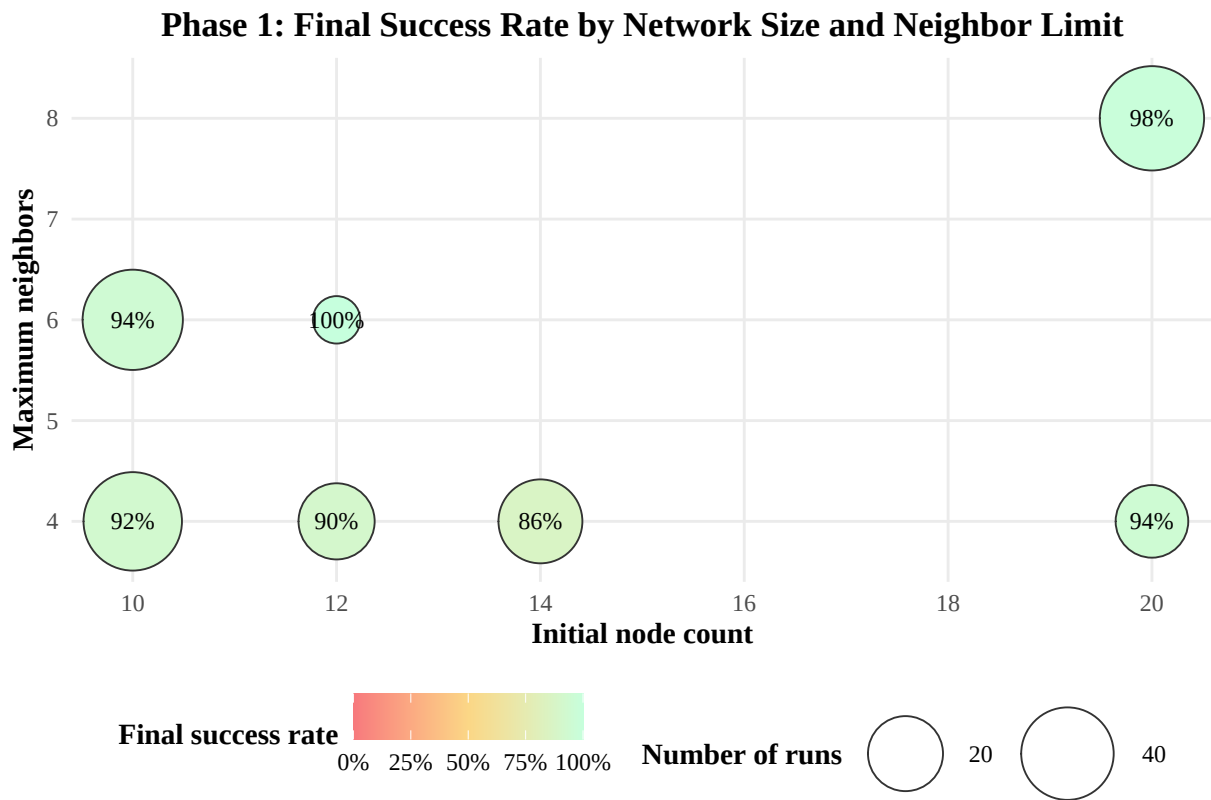


3.2 Phase 3: Single-Node Failure Repair

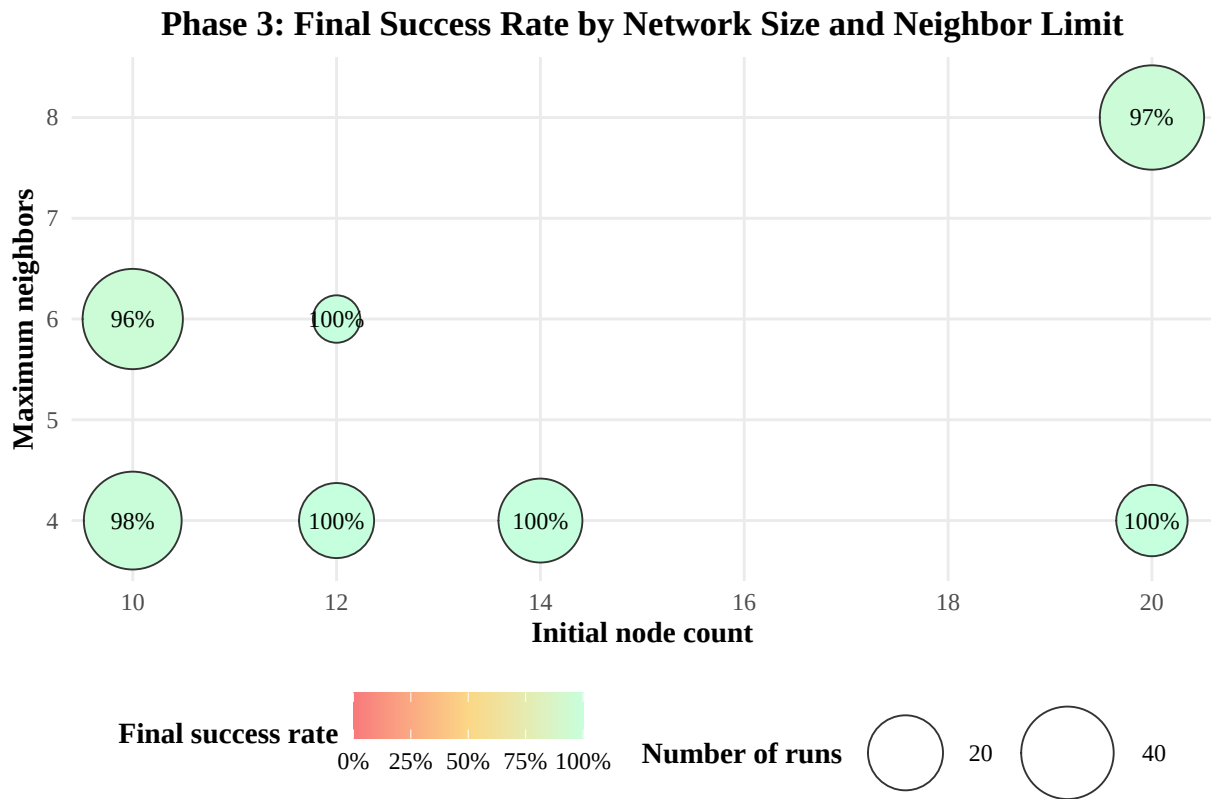

3.3 Phase 4: Adding Nodes

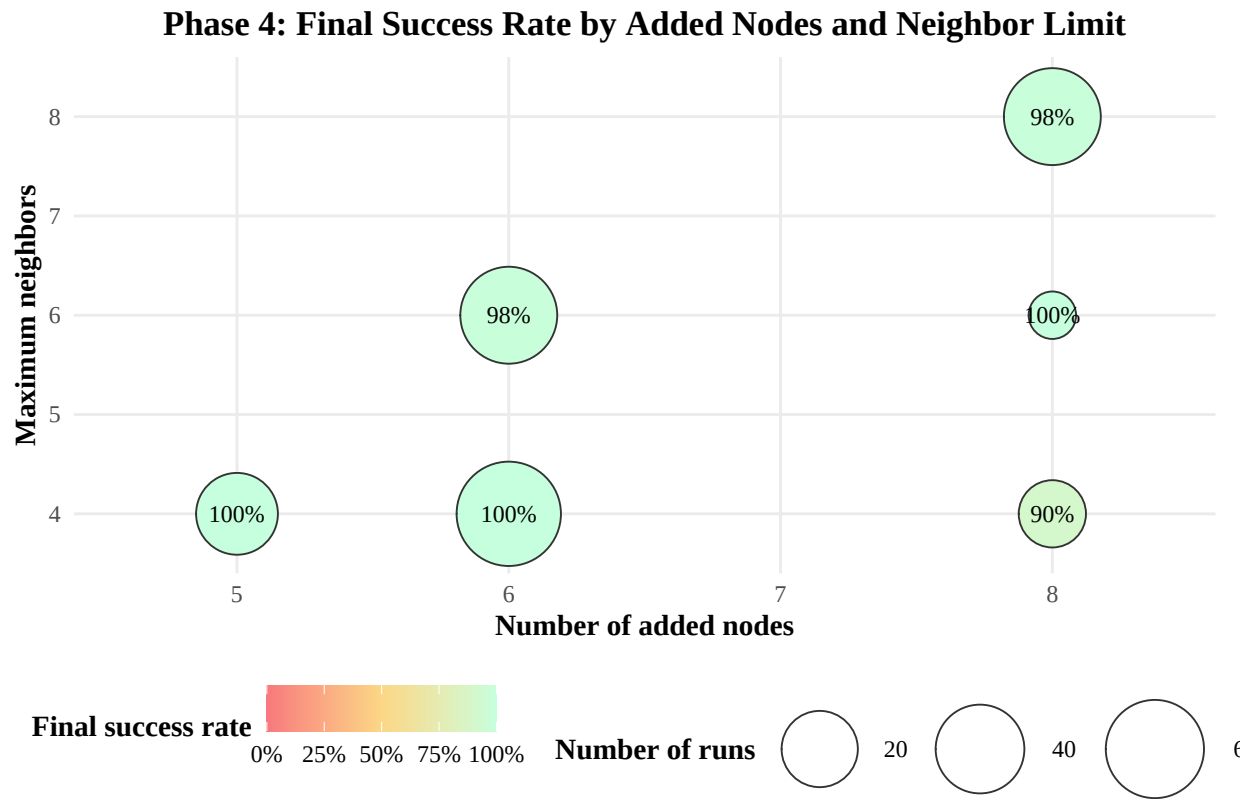

3.4 Phase 5: Removing Multiple Nodes

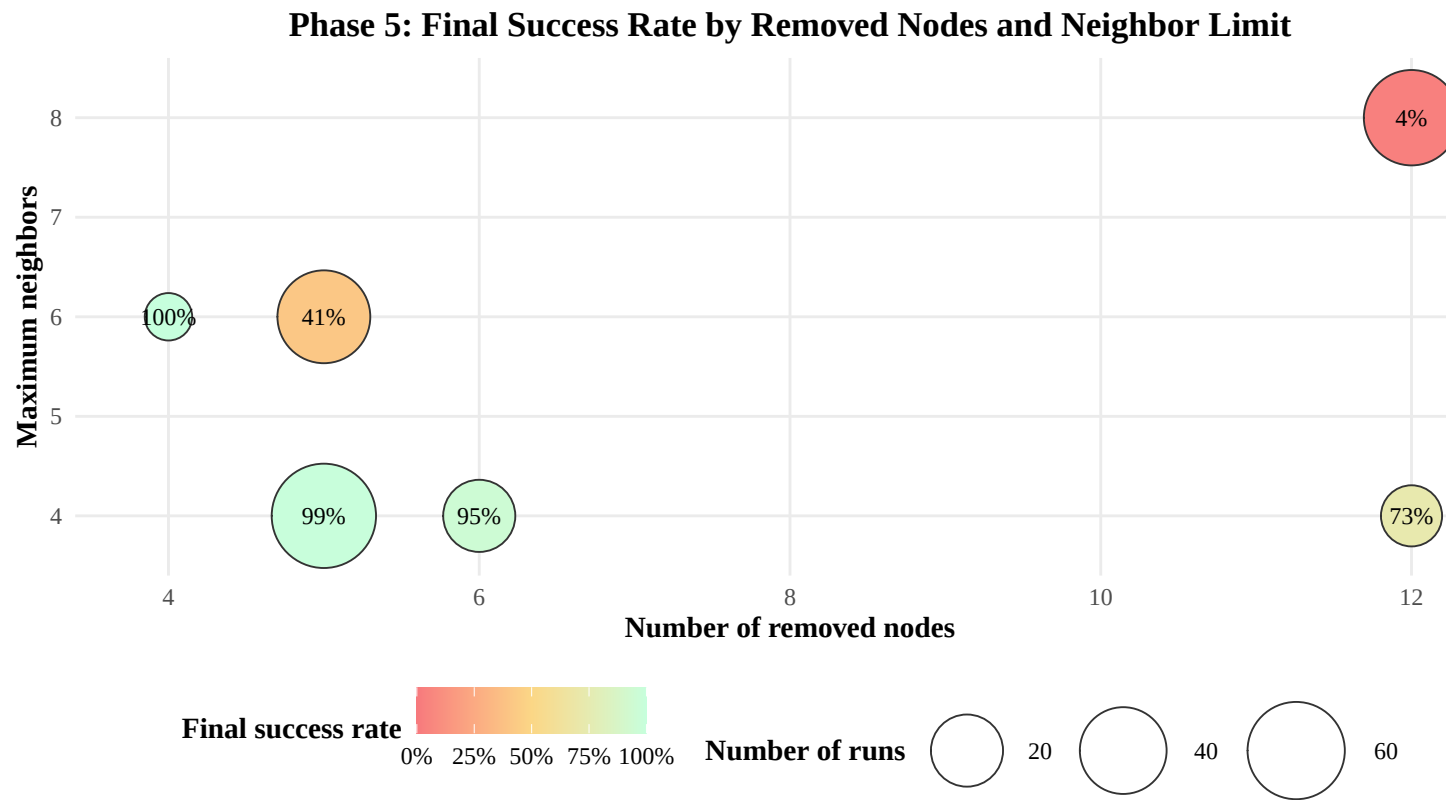


3.5 Combined Input-Variable Comparison





Final Success Rates Across Tested Network Sizes, Neighbor Limits, Node Addition

Final success includes successful replacement-based recovery; bubble size represents the number of runs

Phase 1: Final Success Rate by Network Size and Neighbor LimitPhase 3: Final Success Rate by

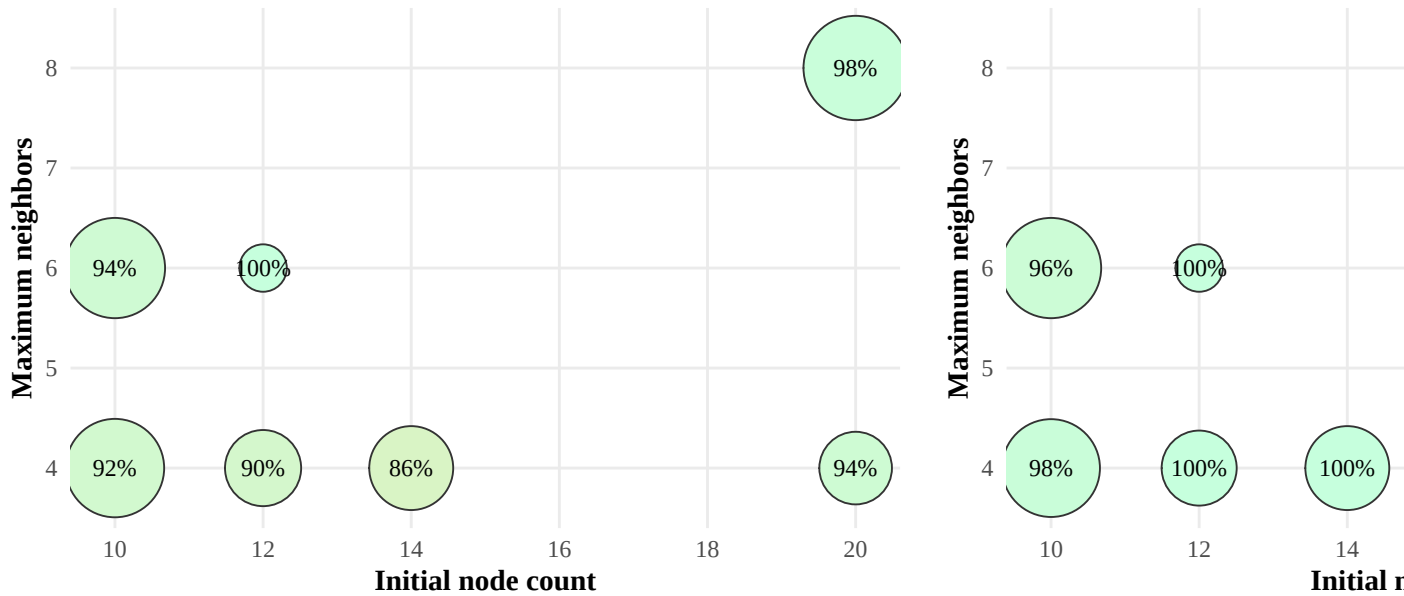


Phase 4: Final Success Rate by Added Nodes and Neighbor LimitPhase 5: Final Success Rate by

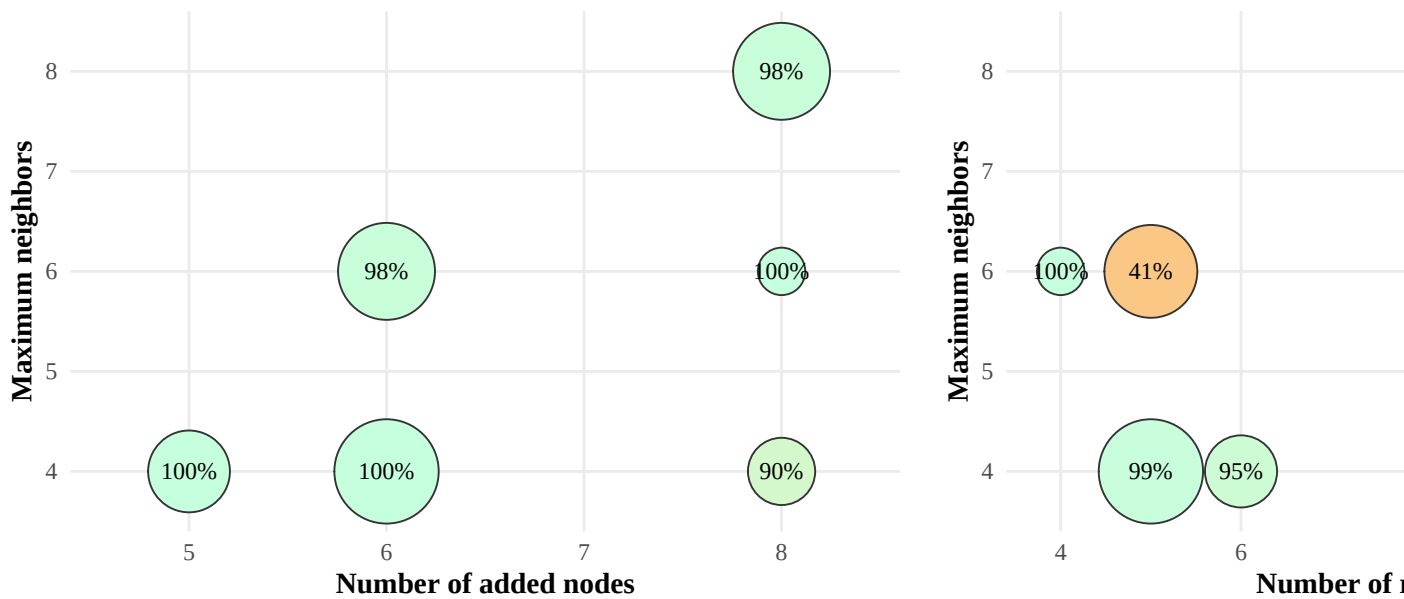

4 Stability Checks

Outcomes of the 10-Second Post-Phase Stability Checks

Each bar shows whether the topology remained valid for the full 10-second observation window after the

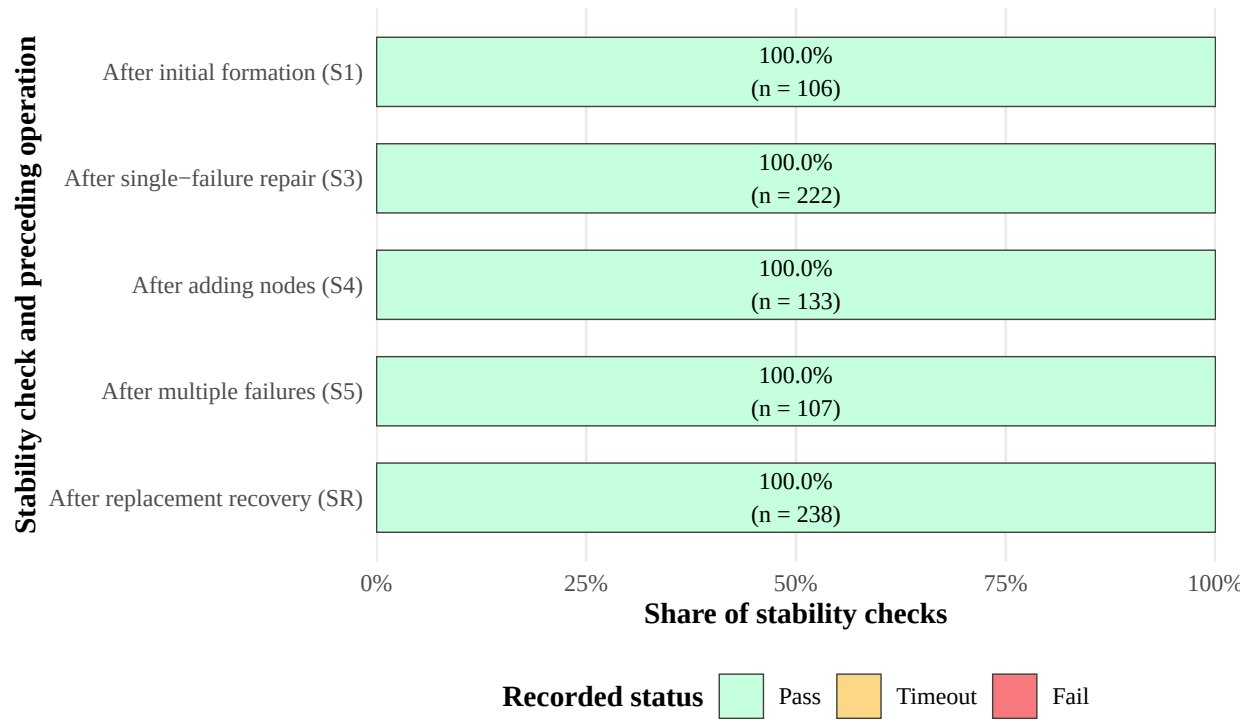


5 Failure Detection Time




6 Main-Phase Completion Time and Input Effects


6.1 Phase 1: Initial Network Formation

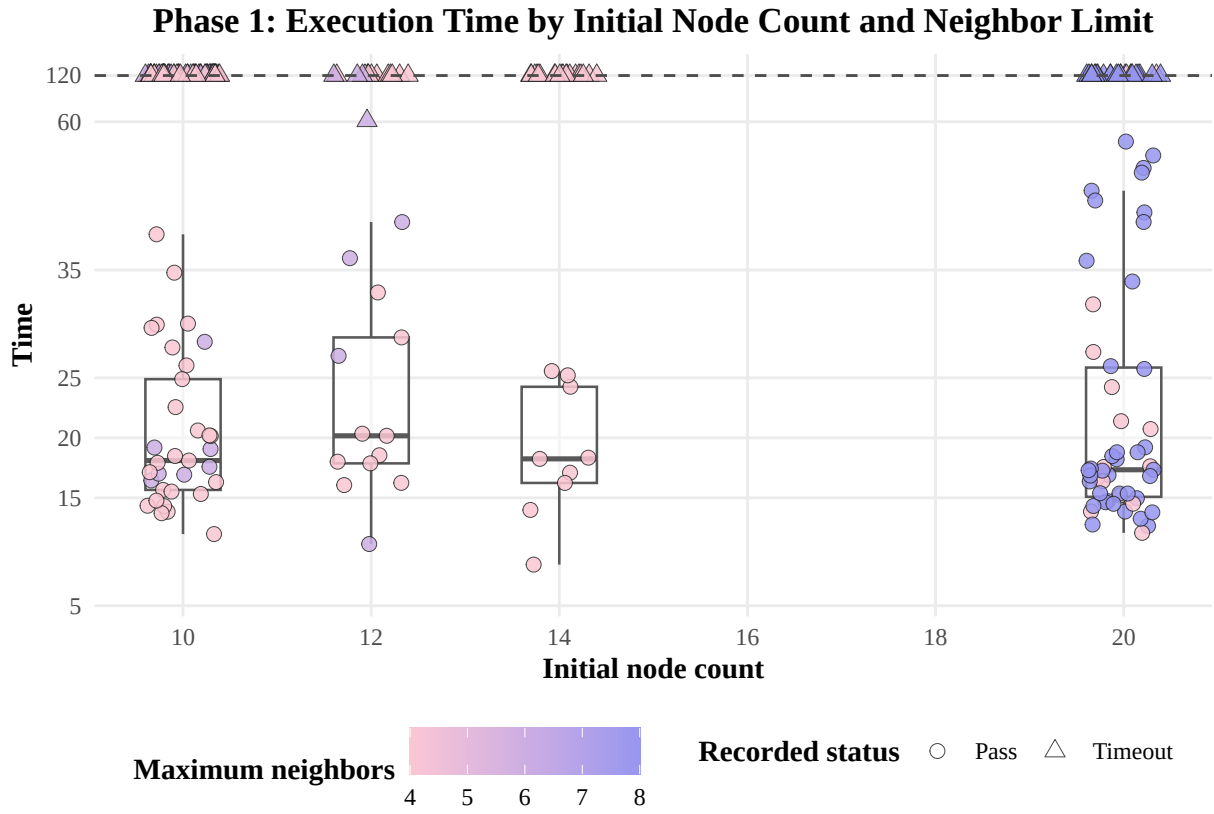

6.2 Phase 3: Repair After One Node Failure

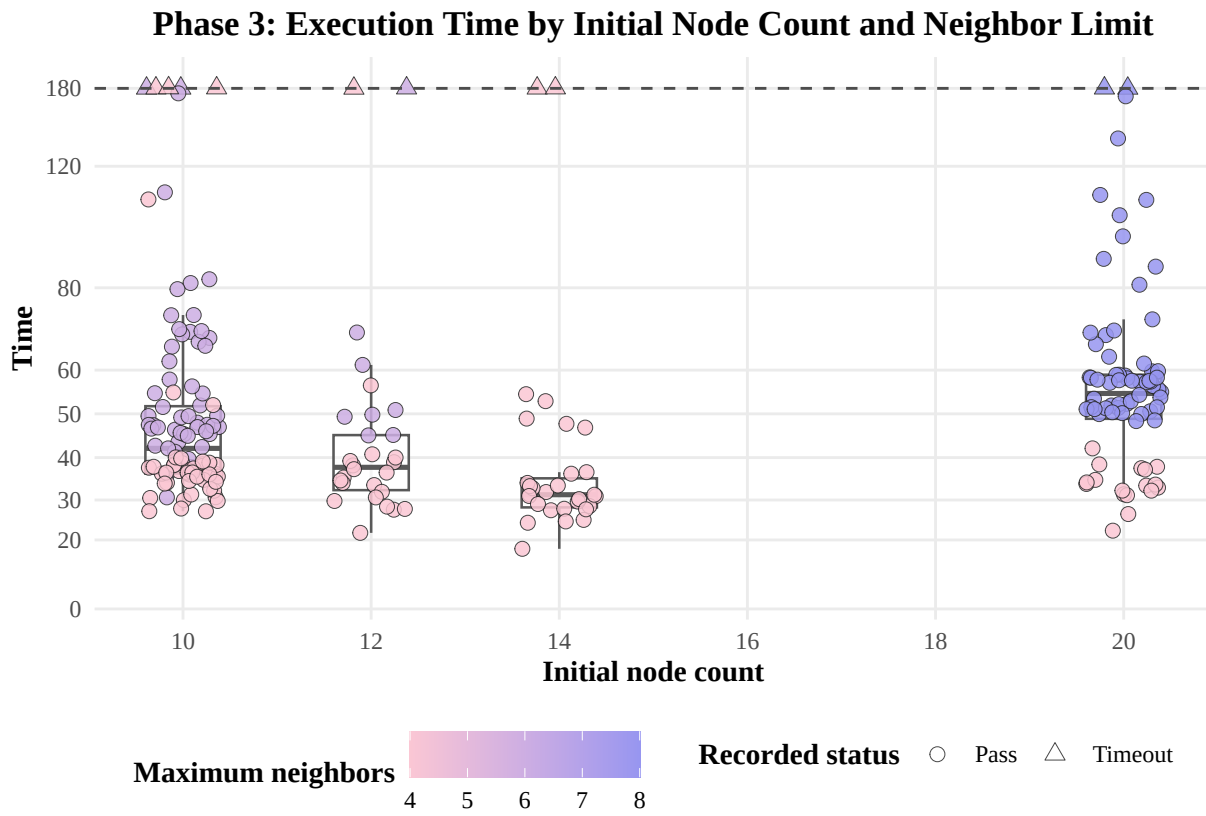


6.3 Phase 4: Adding Nodes

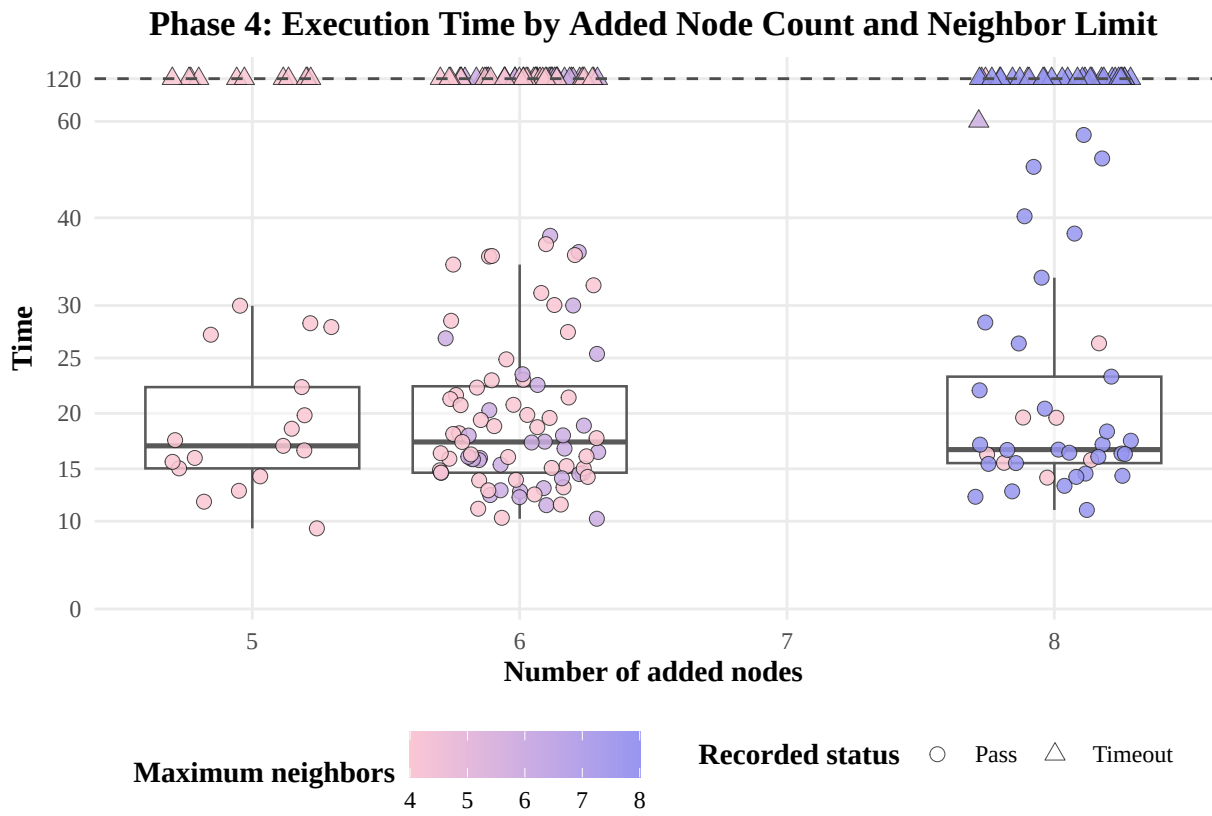

6.4 Phase 5: Repair After Multiple Node Failures


Phase 5: Execution Time by Removed Node Count and Neighbor Limit

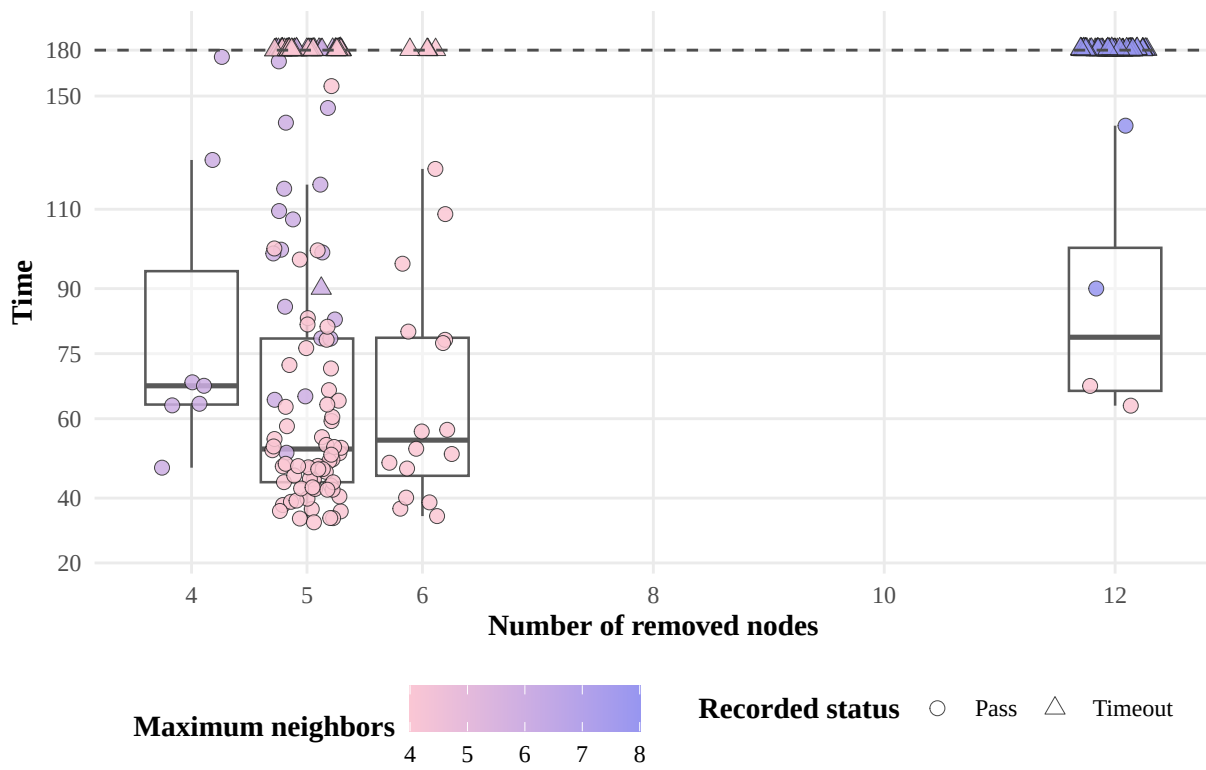

7 Replacement-Based Recovery Completion Time


Replacement-Based Recovery Time by Triggering Operation and Initial Problem C

deficient/problematic nodes and wait for a valid topology. Dashed line: nominal 120-second timeout; dot-dashed line

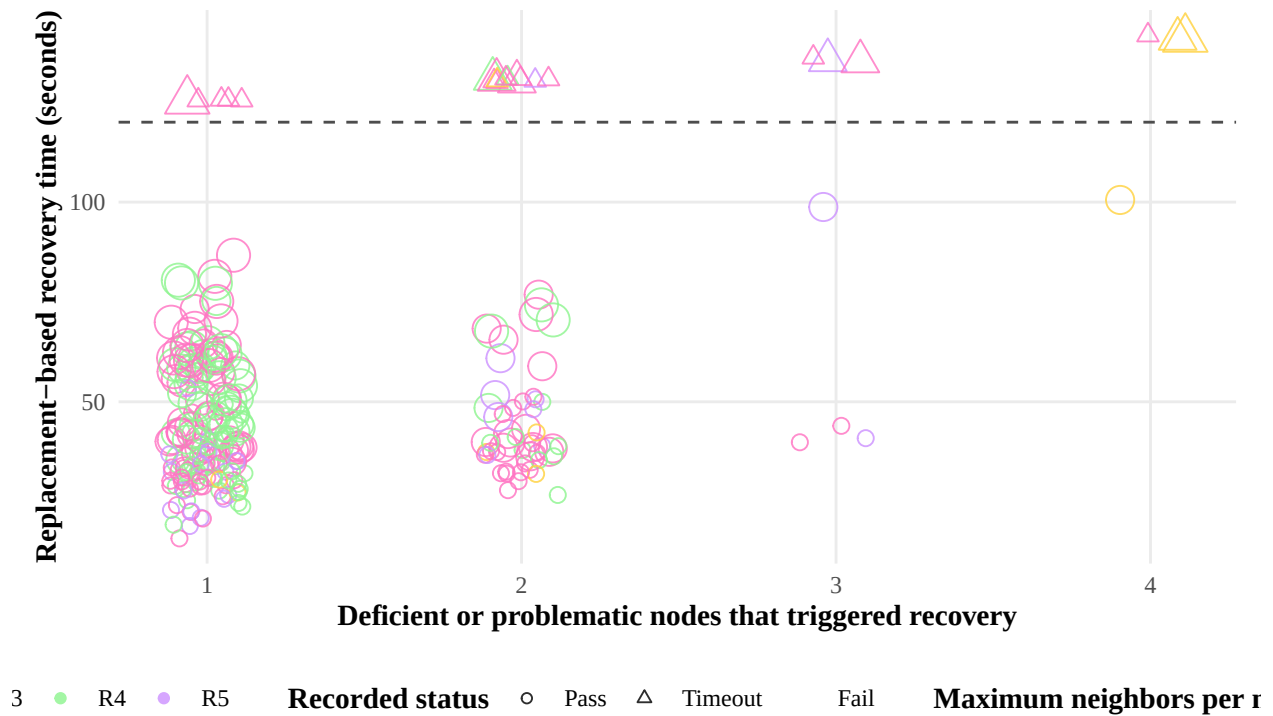


8 Problematic Nodes in Failed Main Phases


8.1 Phase 1: Initial Network Formation

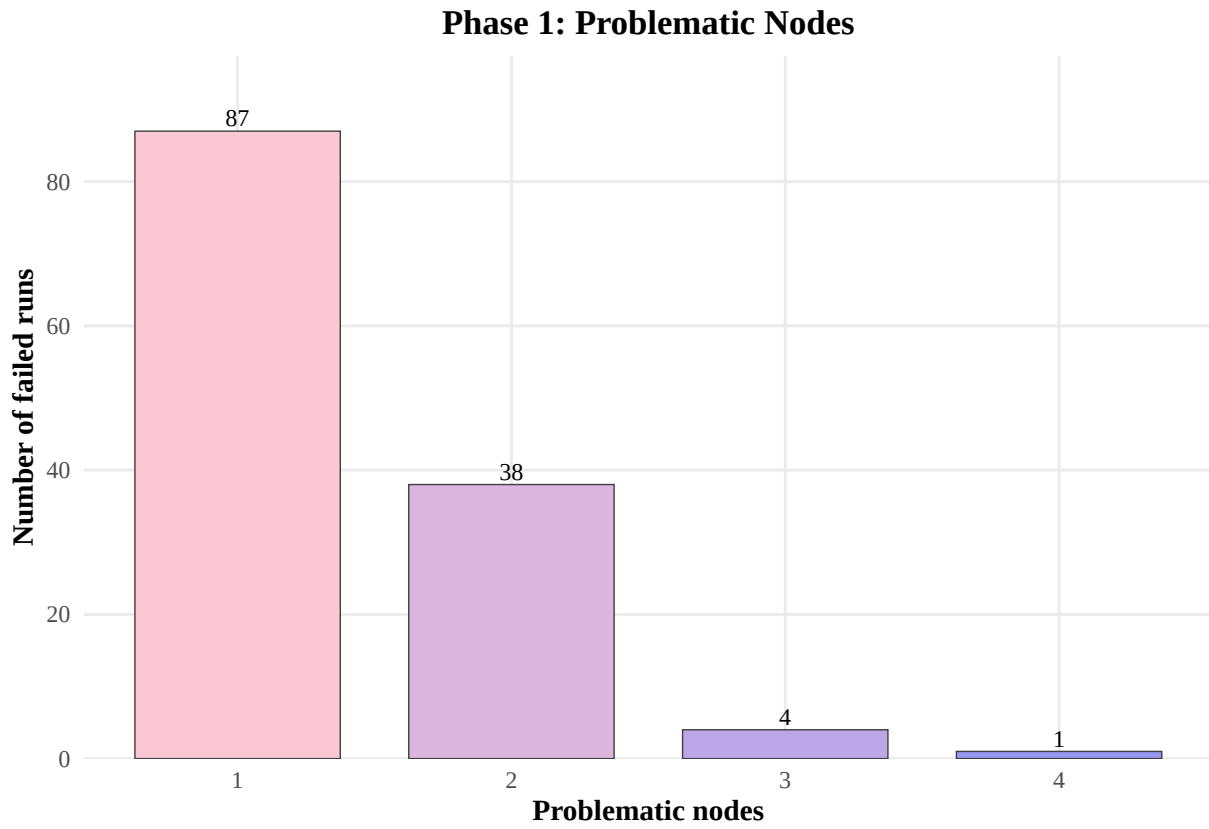


8.2 Phase 3: Repair After One Node Failure

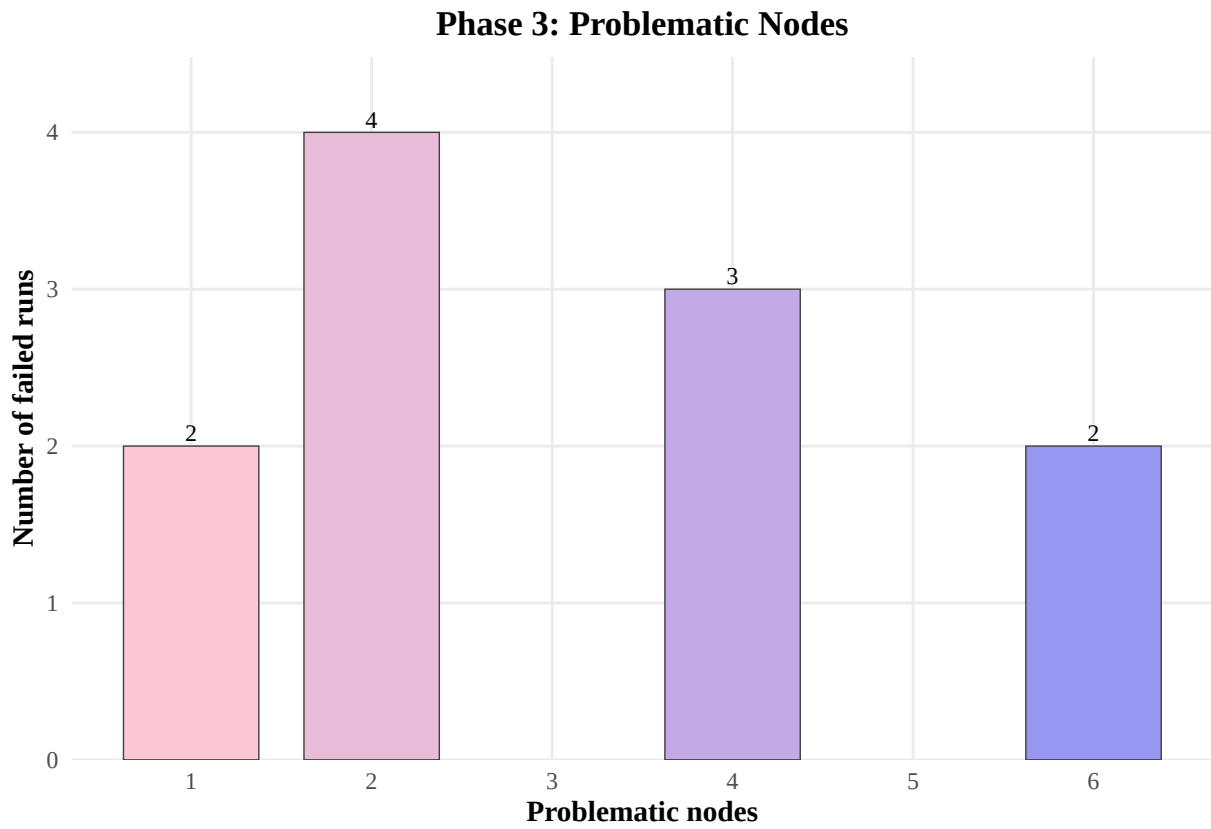

8.3 Phase 4: Adding Nodes

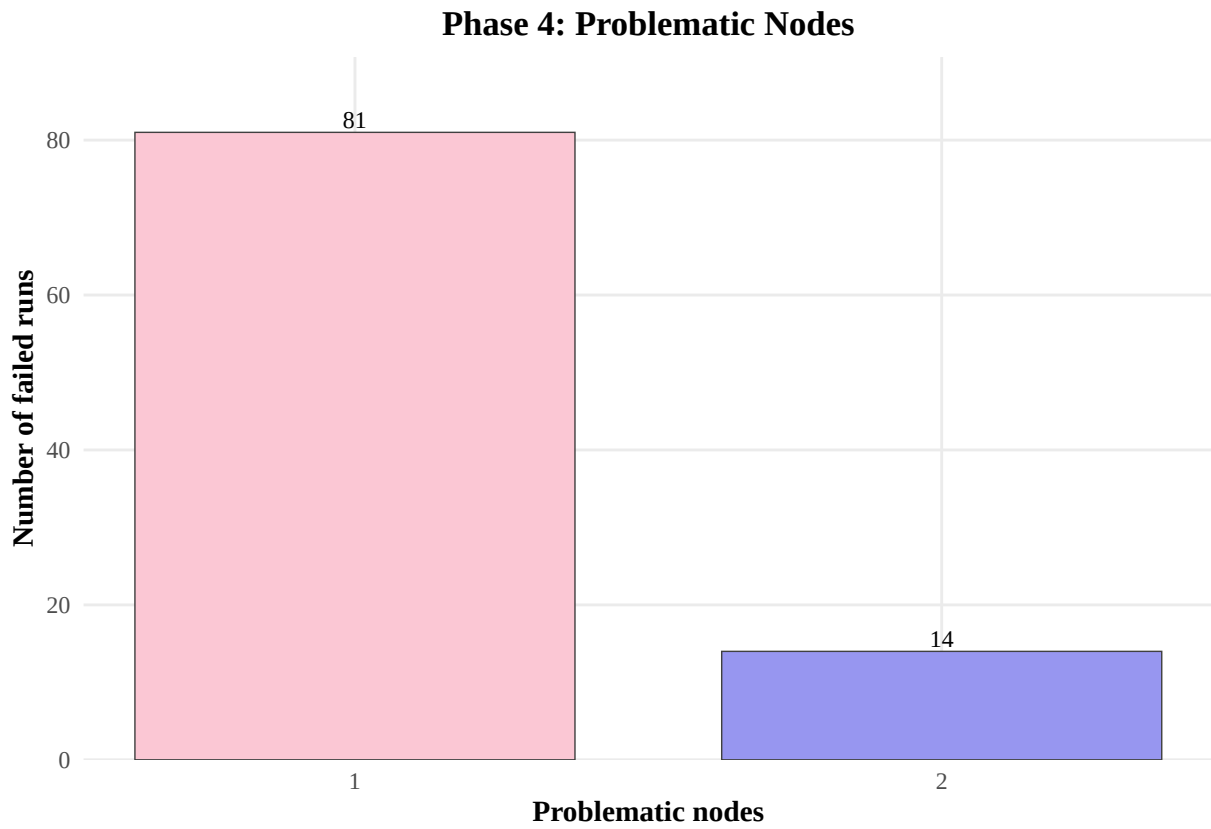

8.4 Phase 5: Repair After Multiple Node Failures

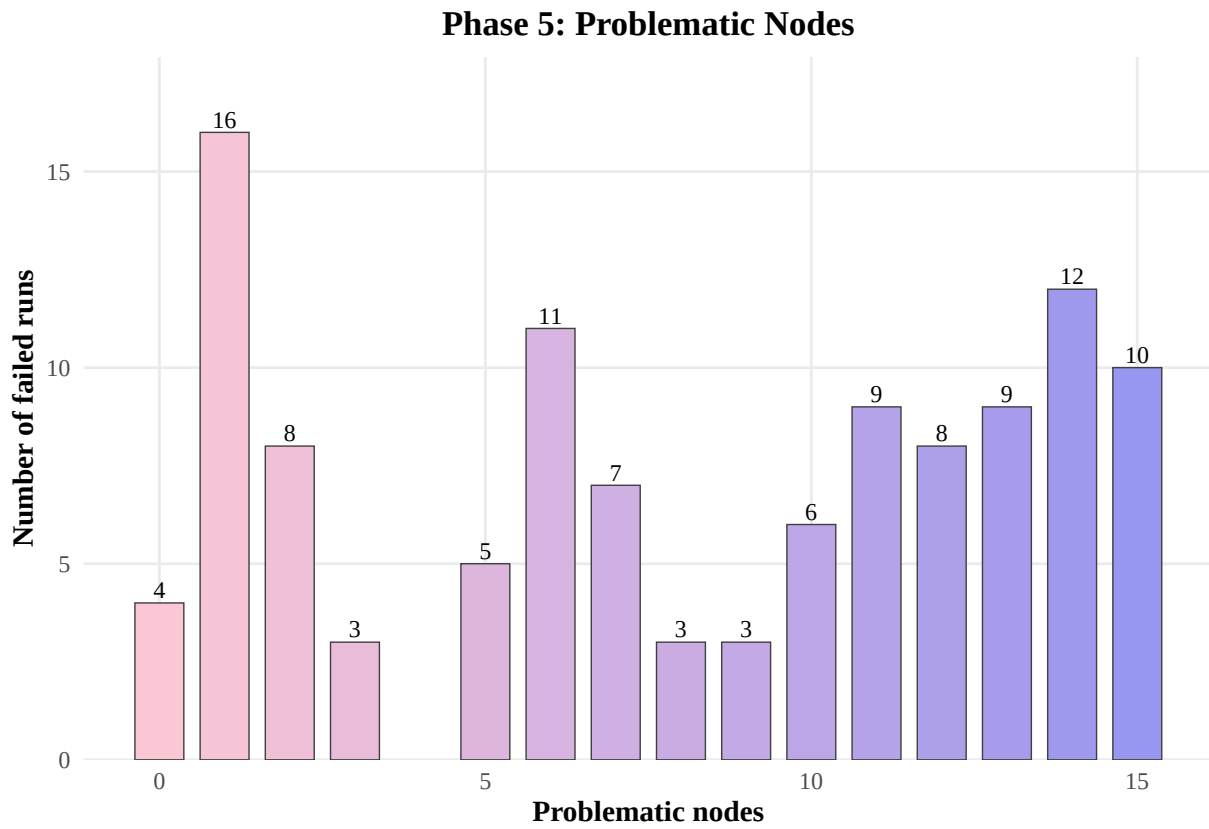

9 Replacement-Based Recovery Success Rates

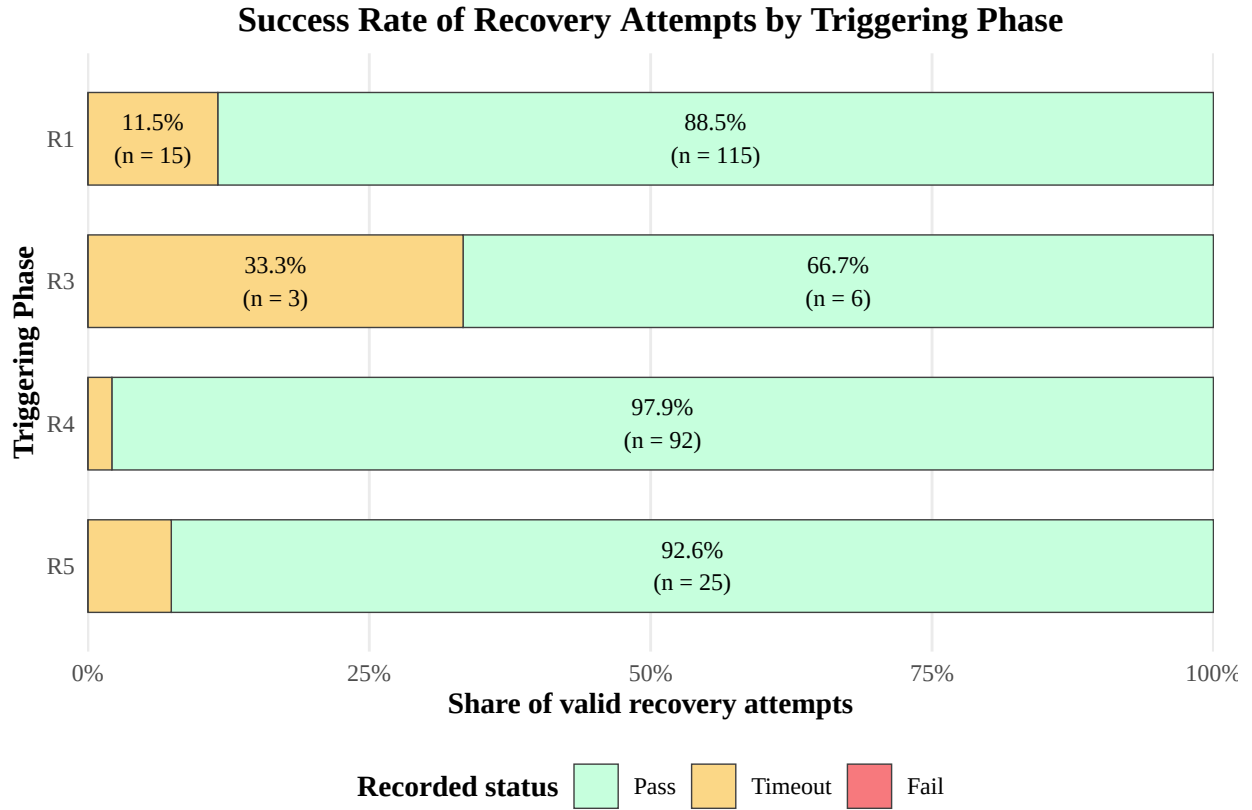


Table 4: Valid replacement-based recovery attempts after timeout filtering.

phase	attempts	passes	timeouts	failures	success_rate
R1	130	115	15	0	0.885
R3	9	6	3	0	0.667
R4	94	92	2	0	0.979
R5	27	25	2	0	0.926