

Evaluation Statistics

Contents

1	Setup	2
1.1	Import and Filter Data	2
1.2	Theme Settings	3
2	Success Rates	3
2.1	Final Outcome by Main Phase	3
2.2	Direct, Recovered, and Failed Outcomes	4
3	Final Success Rate by Input Variables	5
3.1	Phase 1: Initial Network Formation	5
3.2	Phase 3: Single-Node Failure Repair	6
3.3	Phase 4: Adding Nodes	7
3.4	Phase 5: Removing Multiple Nodes	8
3.5	Combined Input-Variable Comparison	9
4	Stability Checks	10
5	Failure Detection Time	11
6	Main-Phase Completion Time and Input Effects	12
6.1	Phase 1: Initial Network Formation	12
6.2	Phase 3: Repair After One Node Failure	13
6.3	Phase 4: Adding Nodes	14
6.4	Phase 5: Repair After Multiple Node Failures	15
7	Replacement-Based Recovery Completion Time	16

8	Problematic Nodes in Failed Main Phases	17
8.1	Phase 1: Initial Network Formation	17
8.2	Phase 3: Repair After One Node Failure	18
8.3	Phase 4: Adding Nodes	19
8.4	Phase 5: Repair After Multiple Node Failures	20
9	Replacement-Based Recovery Success Rates	21

1 Setup

1.1 Import and Filter Data


Table 1: Entries excluded by timeout and dependency filtering.

phase	removal_reason	removed_entries
Phase 5	Elapsed time exceeded configured timeout	5
R1	Elapsed time exceeded configured timeout	10
R3	Elapsed time exceeded configured timeout	3
R4	Elapsed time exceeded configured timeout	3
R5	Dependent R/S entry removed with primary phase	5
R5	Elapsed time exceeded configured timeout	2
SR	Dependent R/S entry removed with primary phase	3

1.2 Theme Settings

2 Success Rates

2.1 Final Outcome by Main Phase

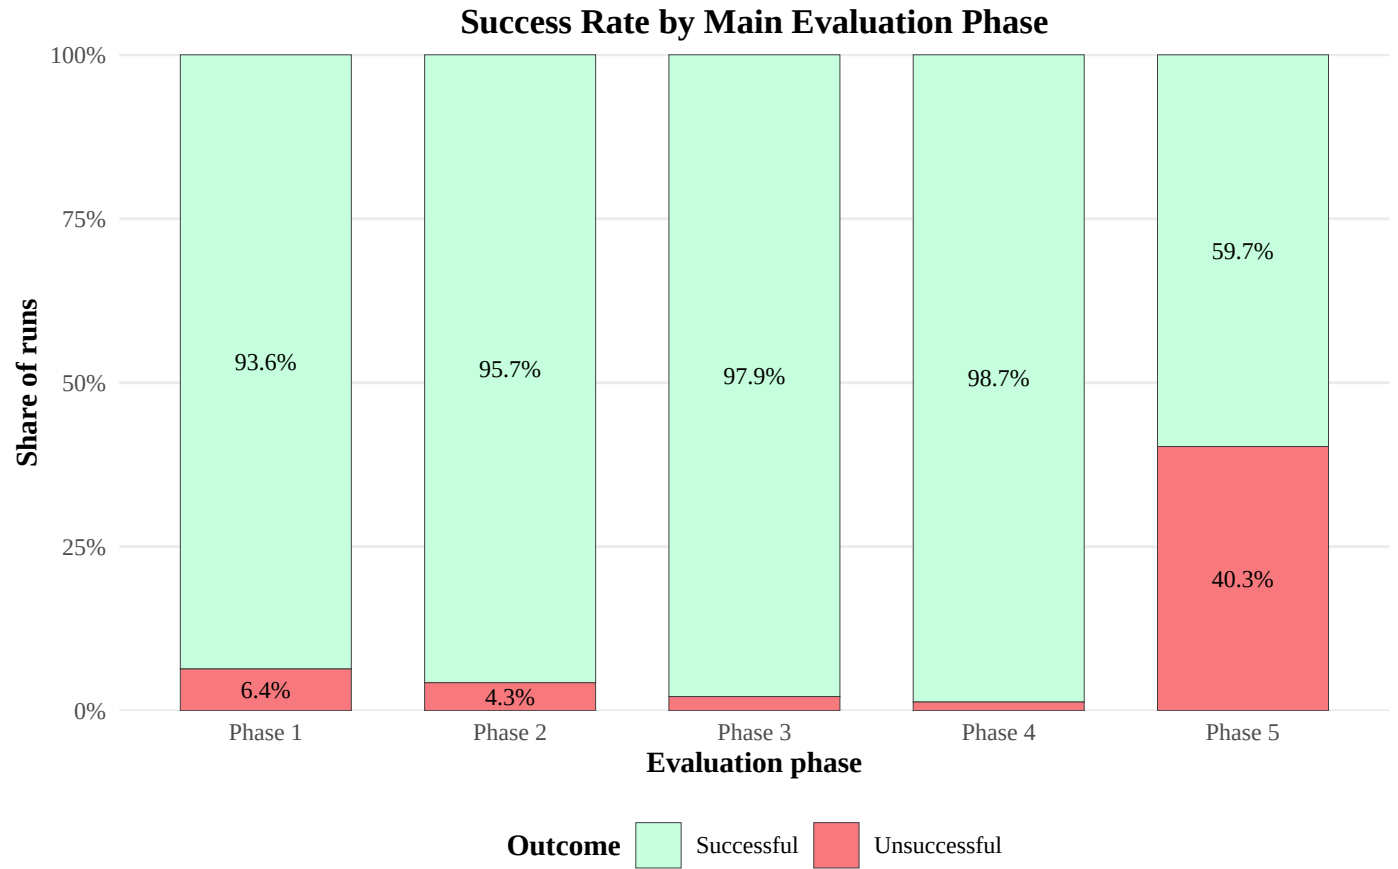

2.2 Direct, Recovered, and Failed Outcomes

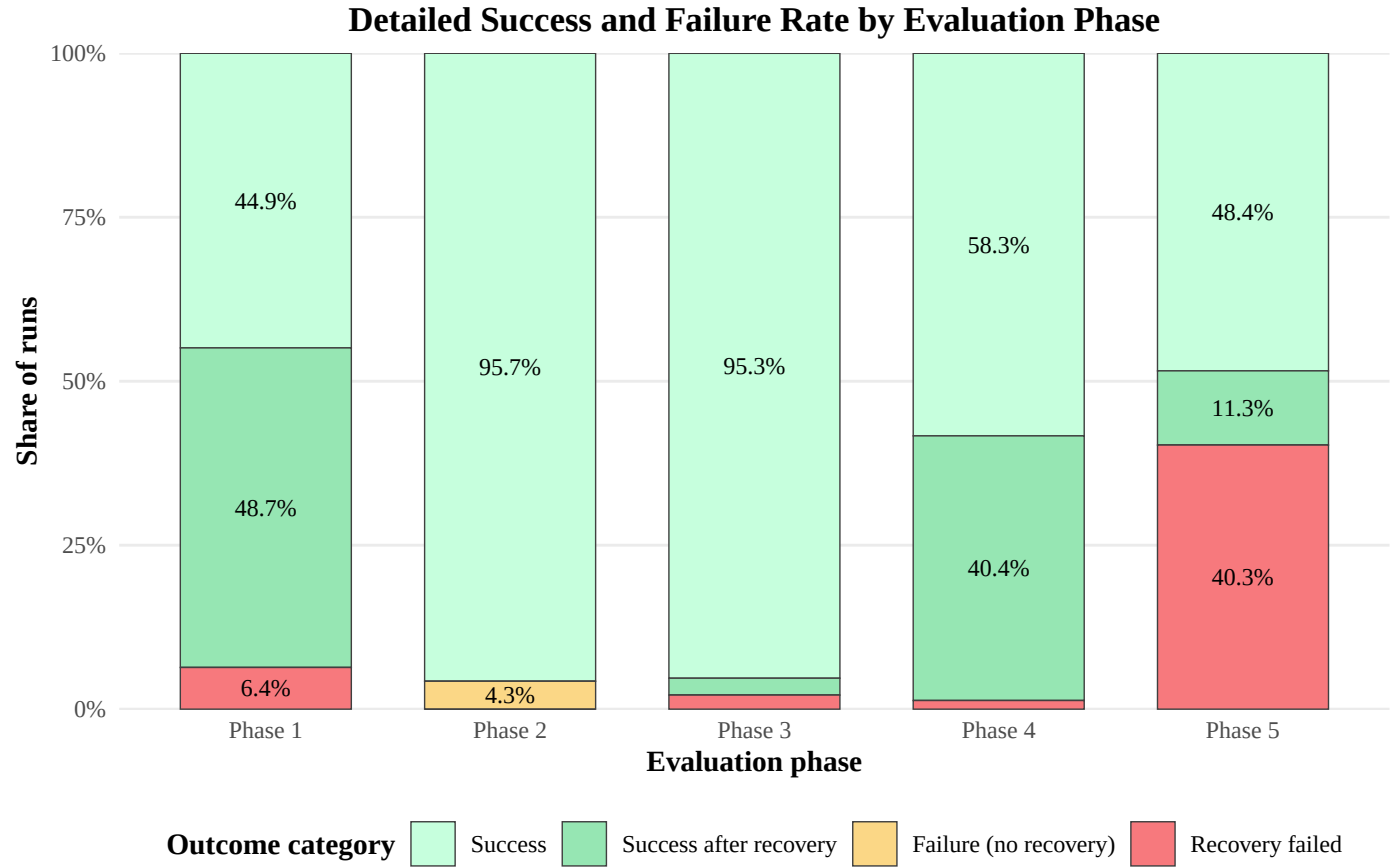


Table 2: Run counts by phase outcome.


phase_group	Success (no recovery)	Success (with recovery)	Failure (no recovery)	Failure (with recovery)
Phase 1	106	115	0	15
Phase 2	225	0	10	0
Phase 3	222	6	0	5
Phase 4	133	92	0	3
Phase 5	107	25	0	89

3 Final Success Rate by Input Variables

3.1 Phase 1: Initial Network Formation

Phase 1 Initial–Network Formation: Final Success Rate by Network Size and Neighbor Limit


Bubble fill and label show final success rate including successful R1 recovery; bubble size shows the number of runs.

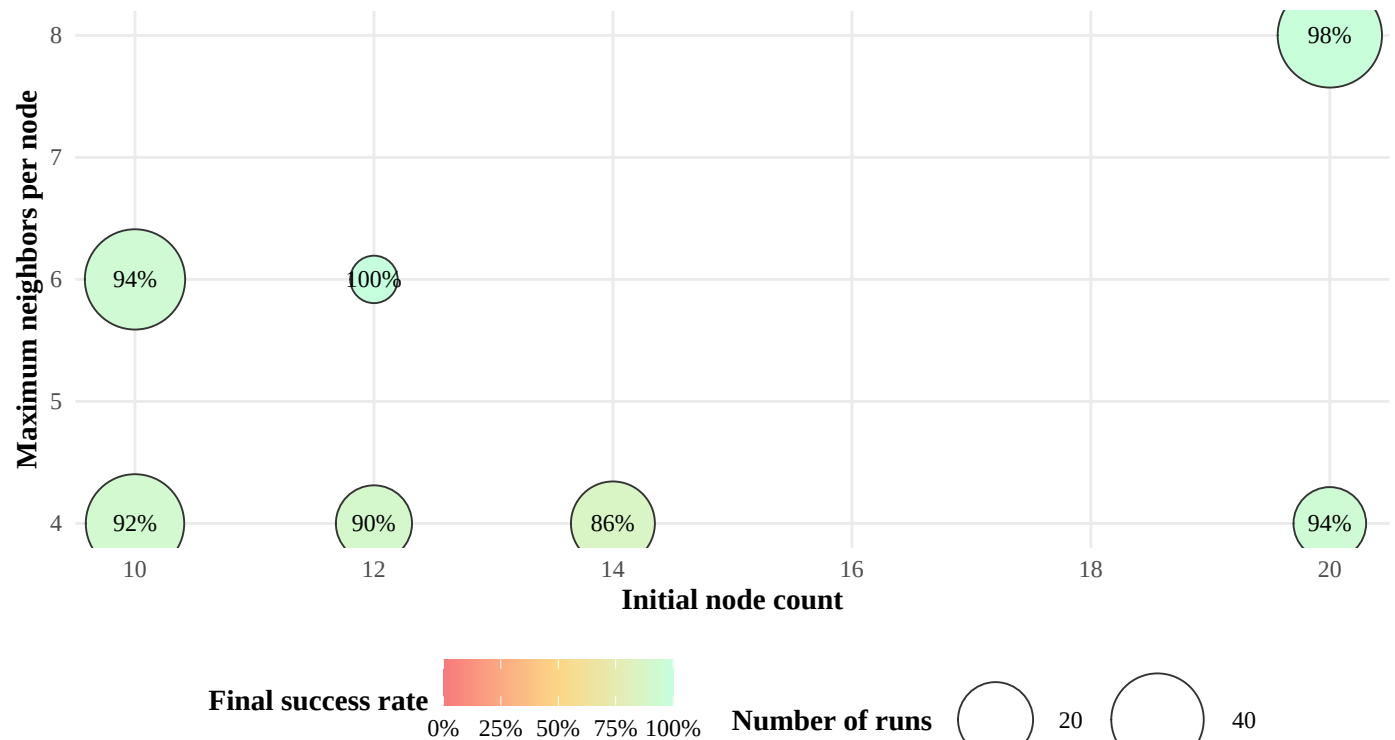

3.2 Phase 3: Single-Node Failure Repair

Phase 3 Single-Node Failure Repair: Final Success Rate by Network Size and Neighbor Limit


Bubble fill and label show final success rate including successful R3 recovery; bubble size shows the number of runs.

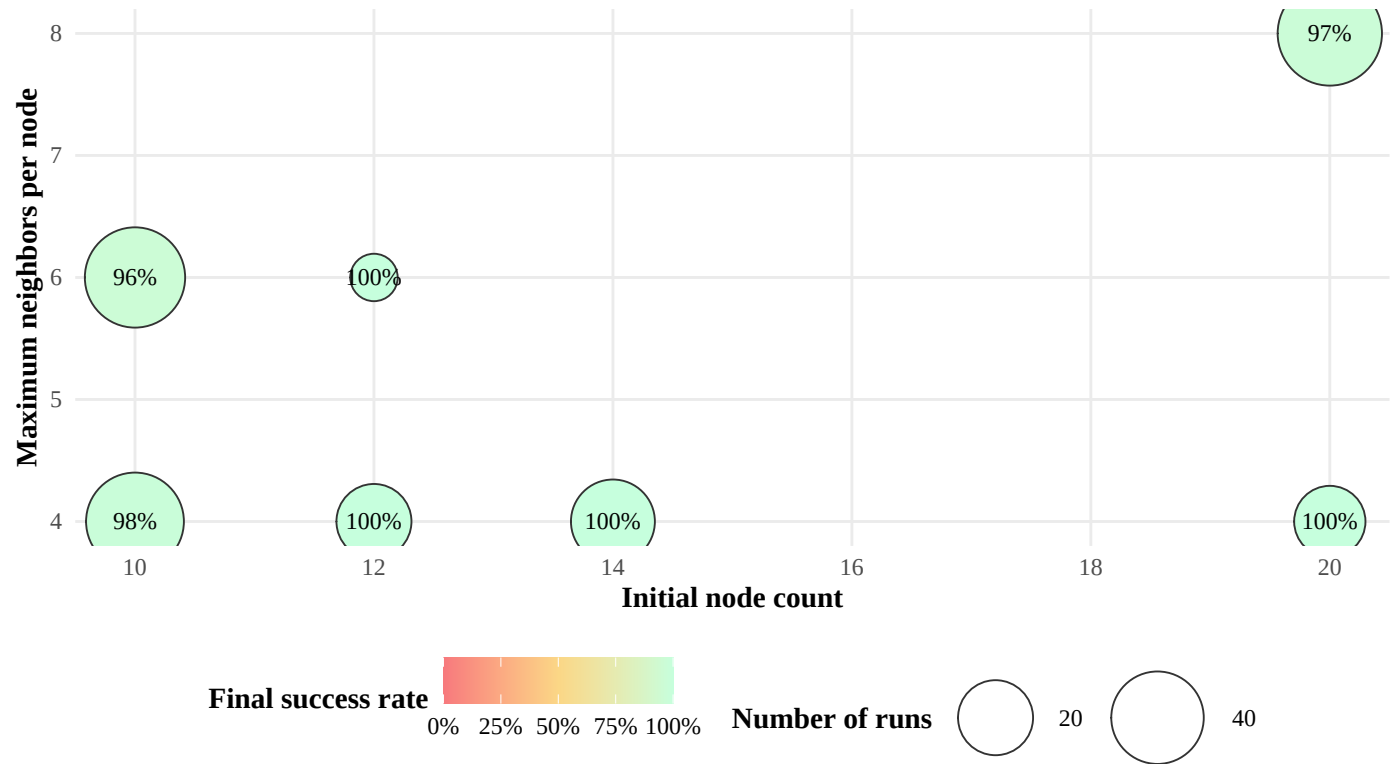

3.3 Phase 4: Adding Nodes

Phase 4 Node Addition: Final Success Rate by Added Nodes and Neighbor Limit


Bubble fill and label show final success rate including successful R4 recovery; bubble size shows the number of runs.

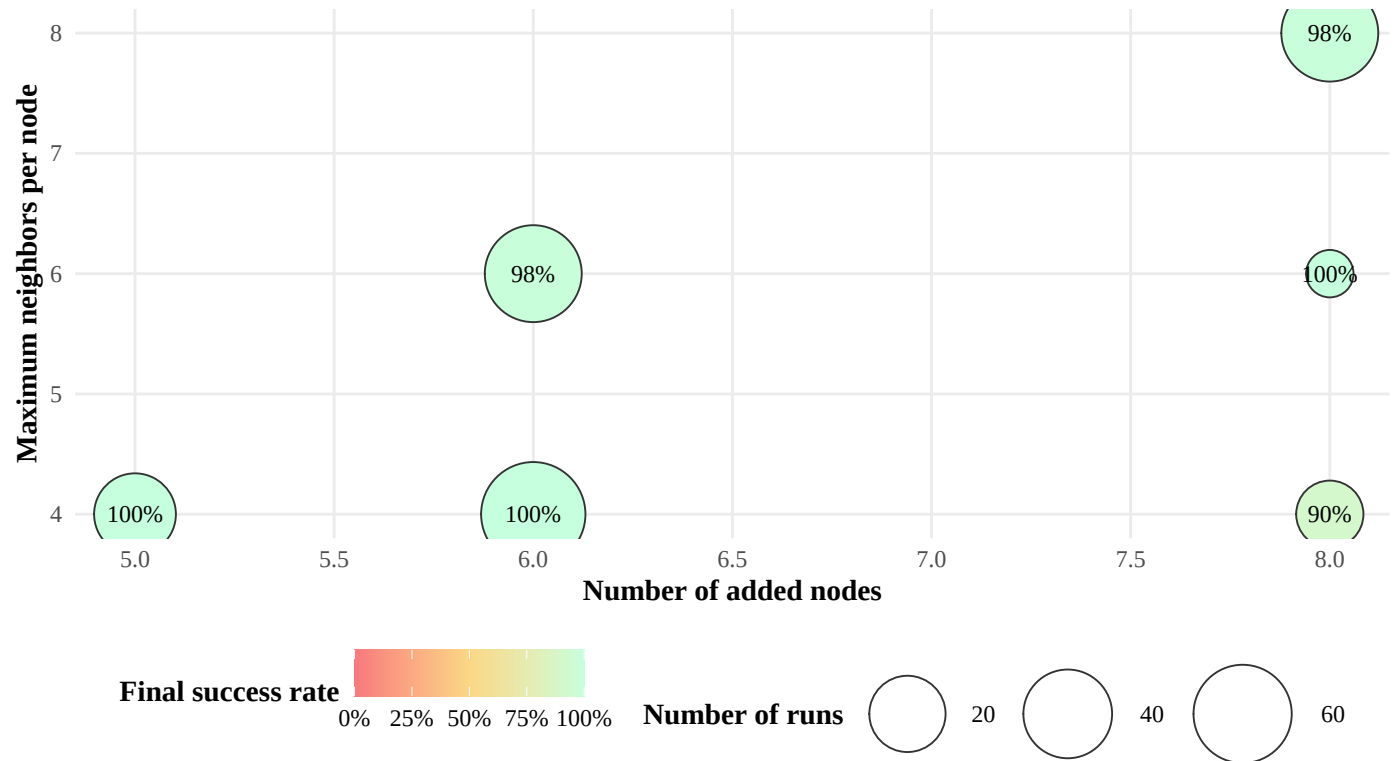

3.4 Phase 5: Removing Multiple Nodes

Phase 5 Multiple-Node Failure Repair: Final Success Rate by Removed Nodes and Neighbor Li

Bubble fill and label show final success rate including successful R5 recovery; bubble size shows the number of runs.

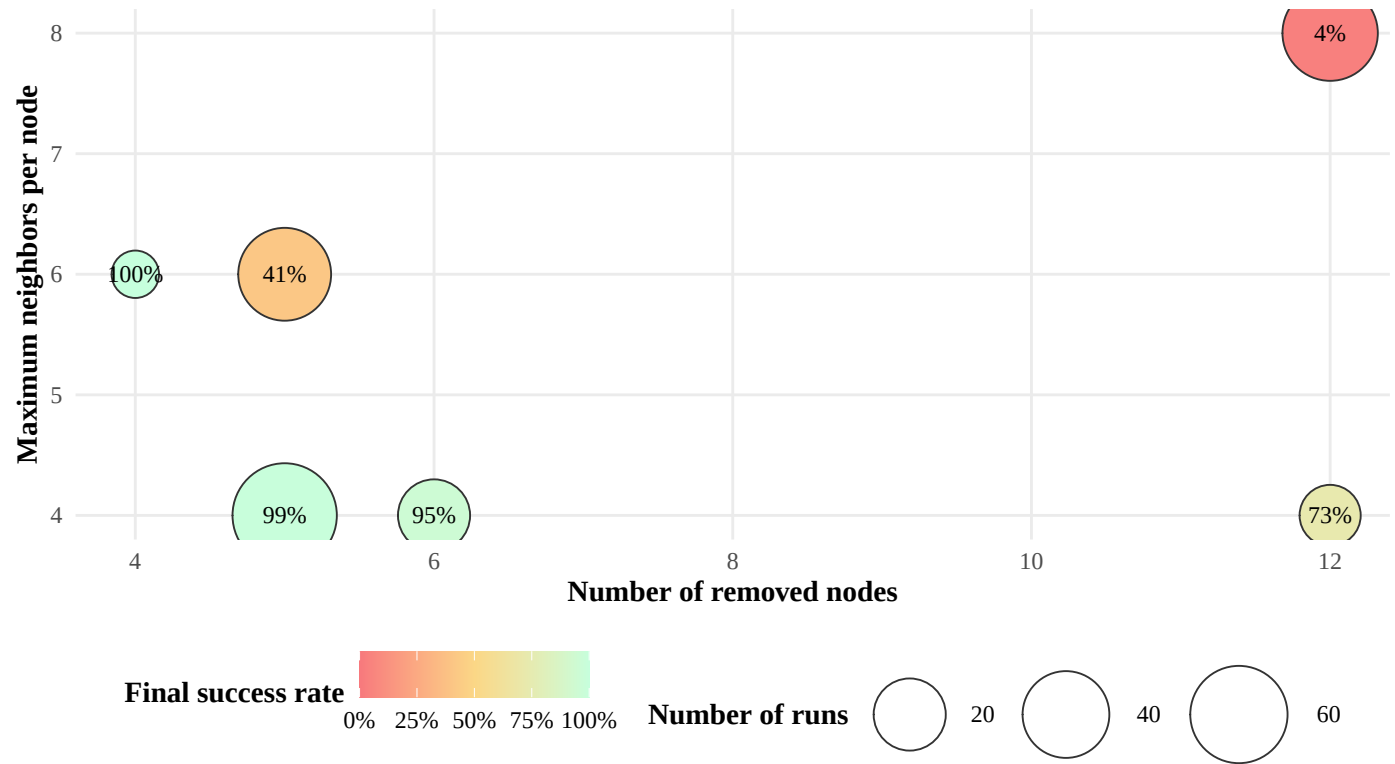


3.5 Combined Input-Variable Comparison

Final Success Rates Across Tested Network Sizes, Neighbor Limits, Node Addition

Final success includes successful replacement-based recovery; bubble size represents the number of re



Final Success Rate by Network Size and Neighbor Limit

l and label show final success rate including successful R1 recovery; bubble size represents the number of runs

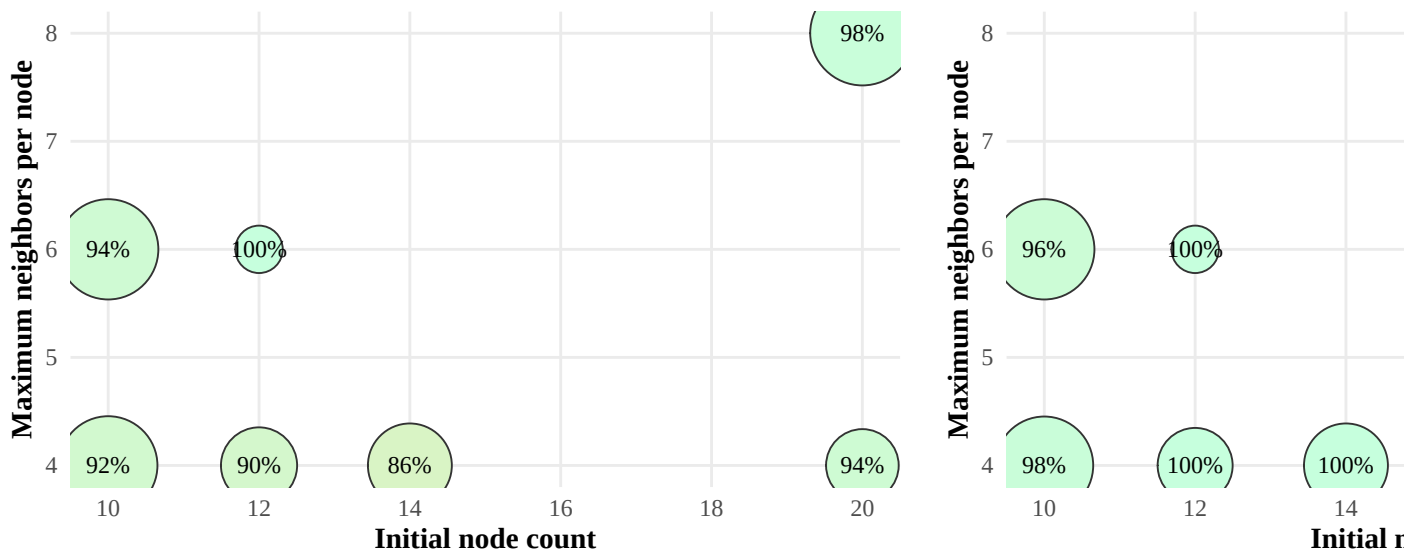


Final Success Rate by Added Nodes and Neighbor Limit

l and label show final success rate including successful R4 recovery; bubble size represents the number of runs

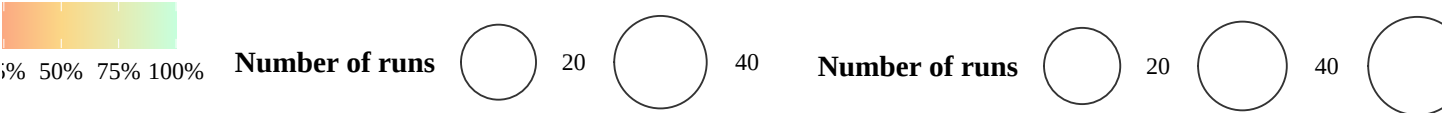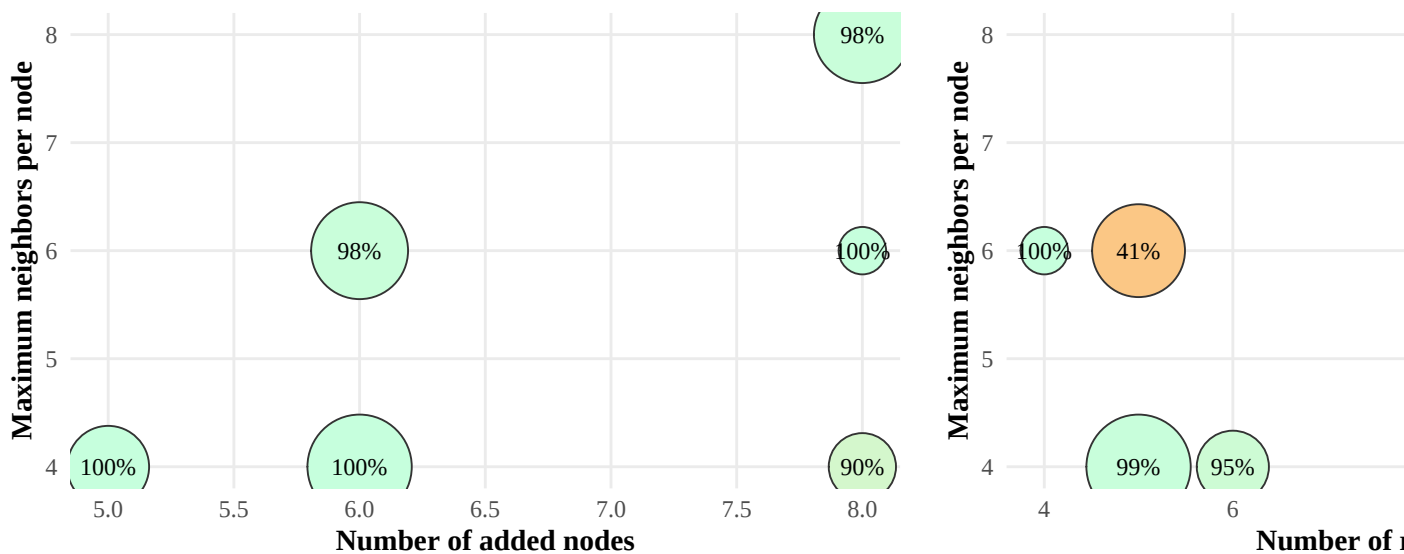


4 Stability Checks

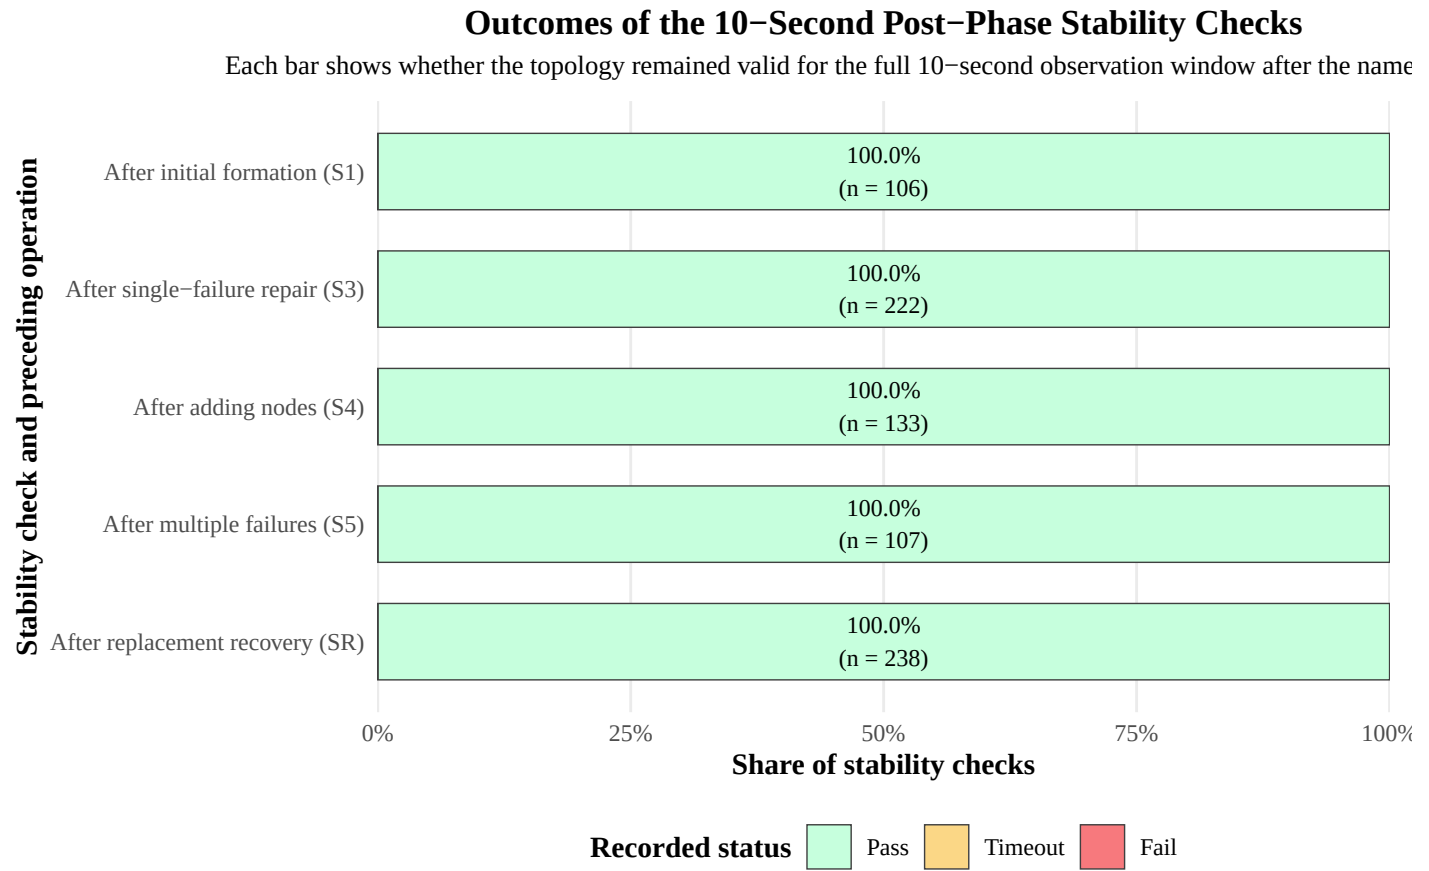

5 Failure Detection Time


Failure-Detection Time: First Report Compared with Complete Expected Reporting

Phase 2.1 ends at the first failure report; Phase 2.2 ends when all expected neighbors have reported. Dashed line: configured 120-second

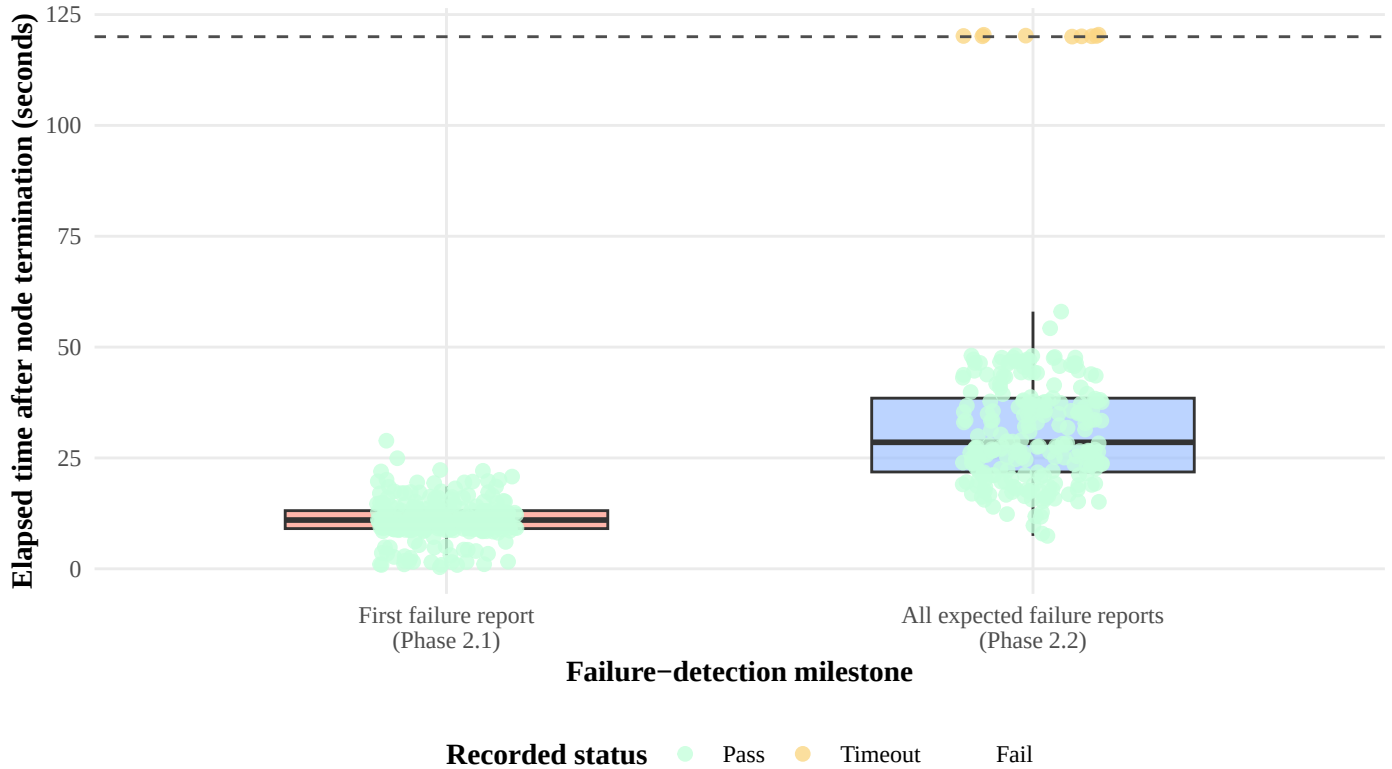


6 Main-Phase Completion Time and Input Effects


6.1 Phase 1: Initial Network Formation

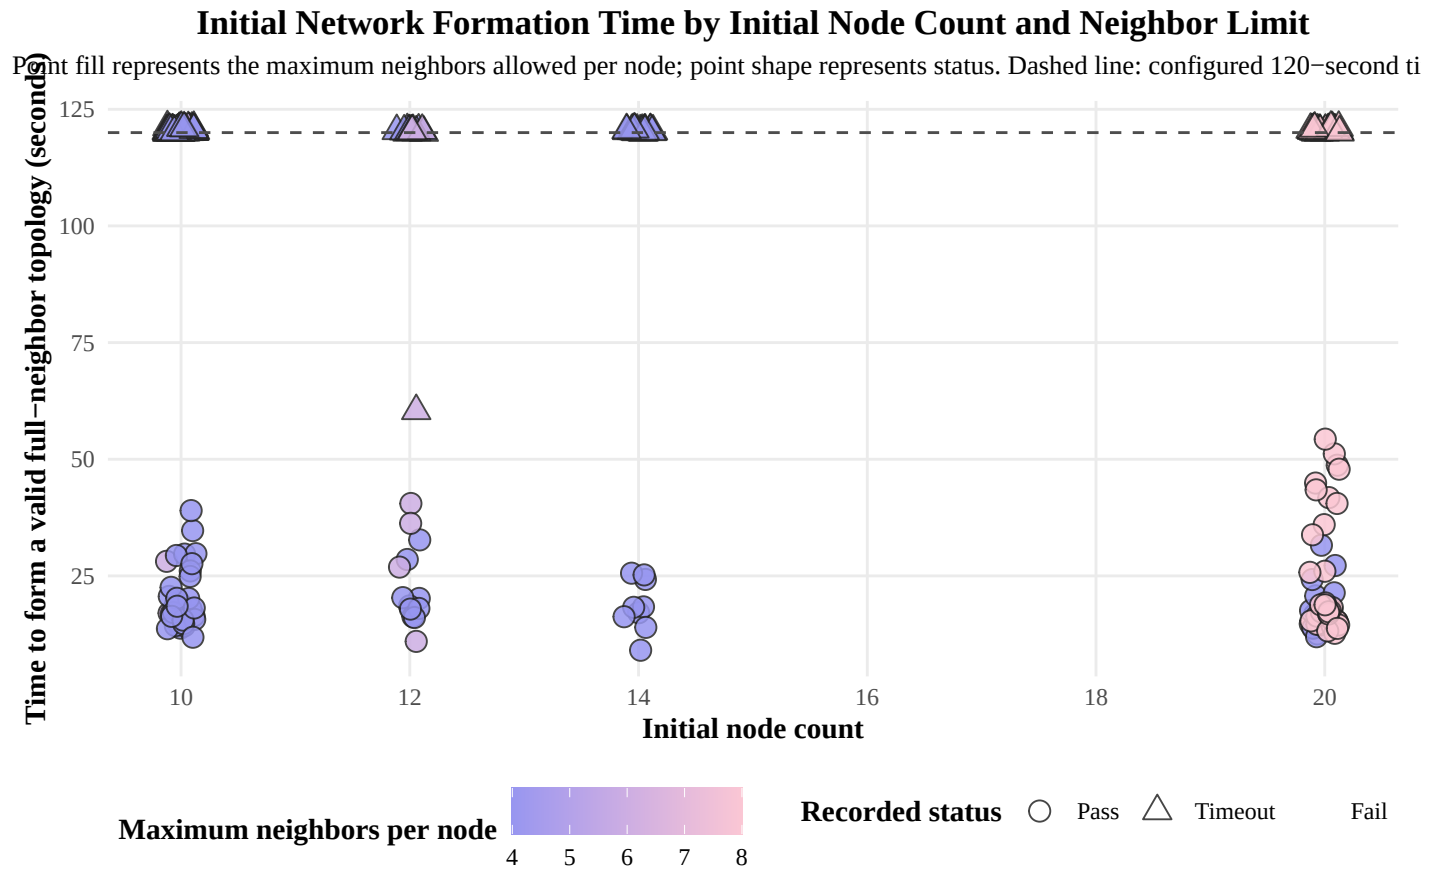


6.2 Phase 3: Repair After One Node Failure

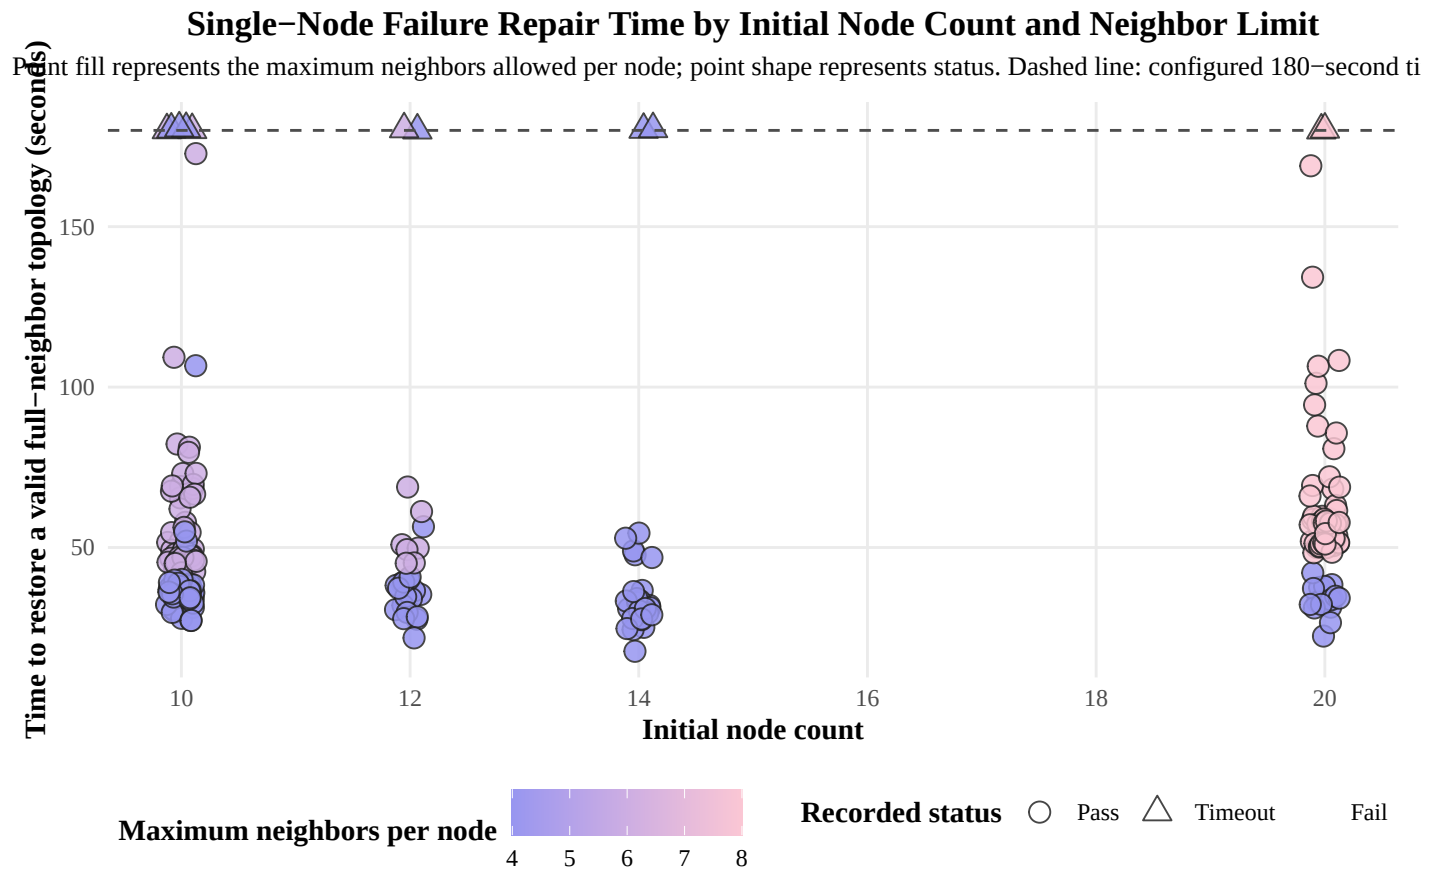

6.3 Phase 4: Adding Nodes

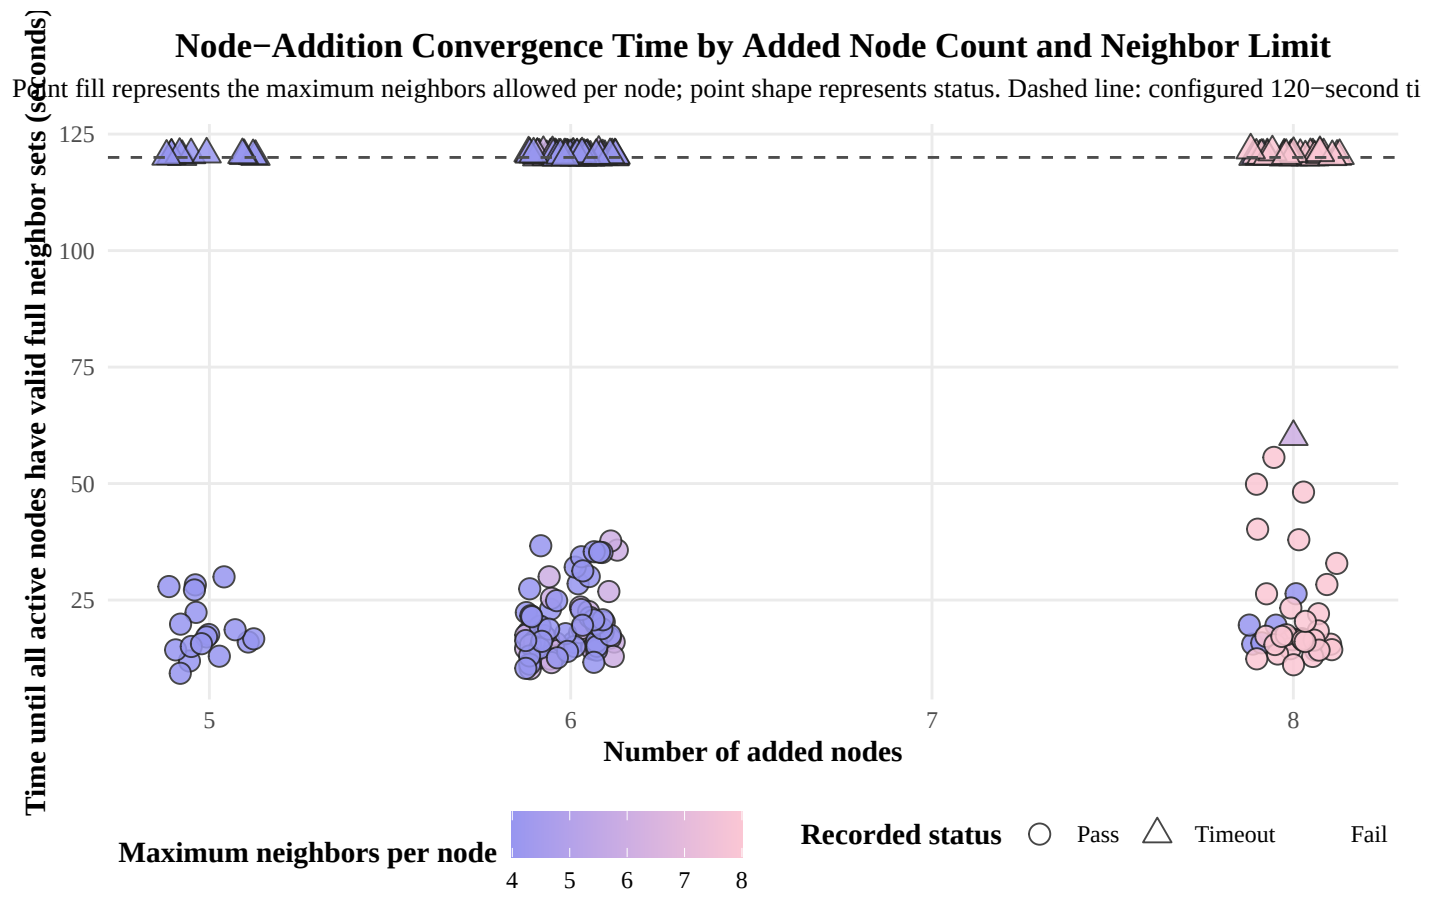


6.4 Phase 5: Repair After Multiple Node Failures

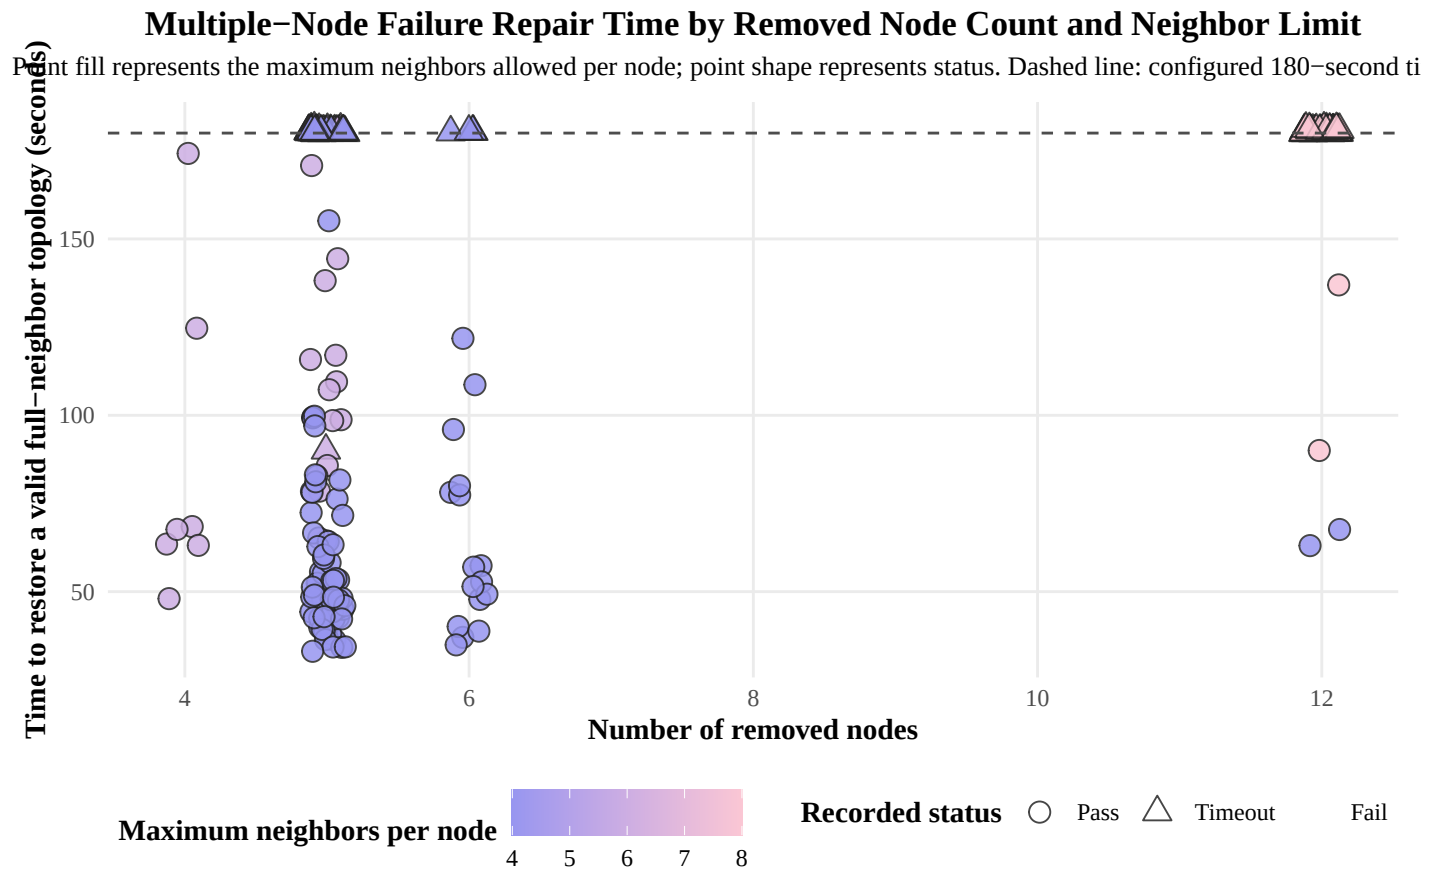

7 Replacement-Based Recovery Completion Time


Replacement-Based Recovery Time by Triggering Operation and Initial Problem Count

R1, R3, R4, and R5 restart deficient/problematic nodes and wait for a valid topology. Dashed line: configured 120-second recovery t

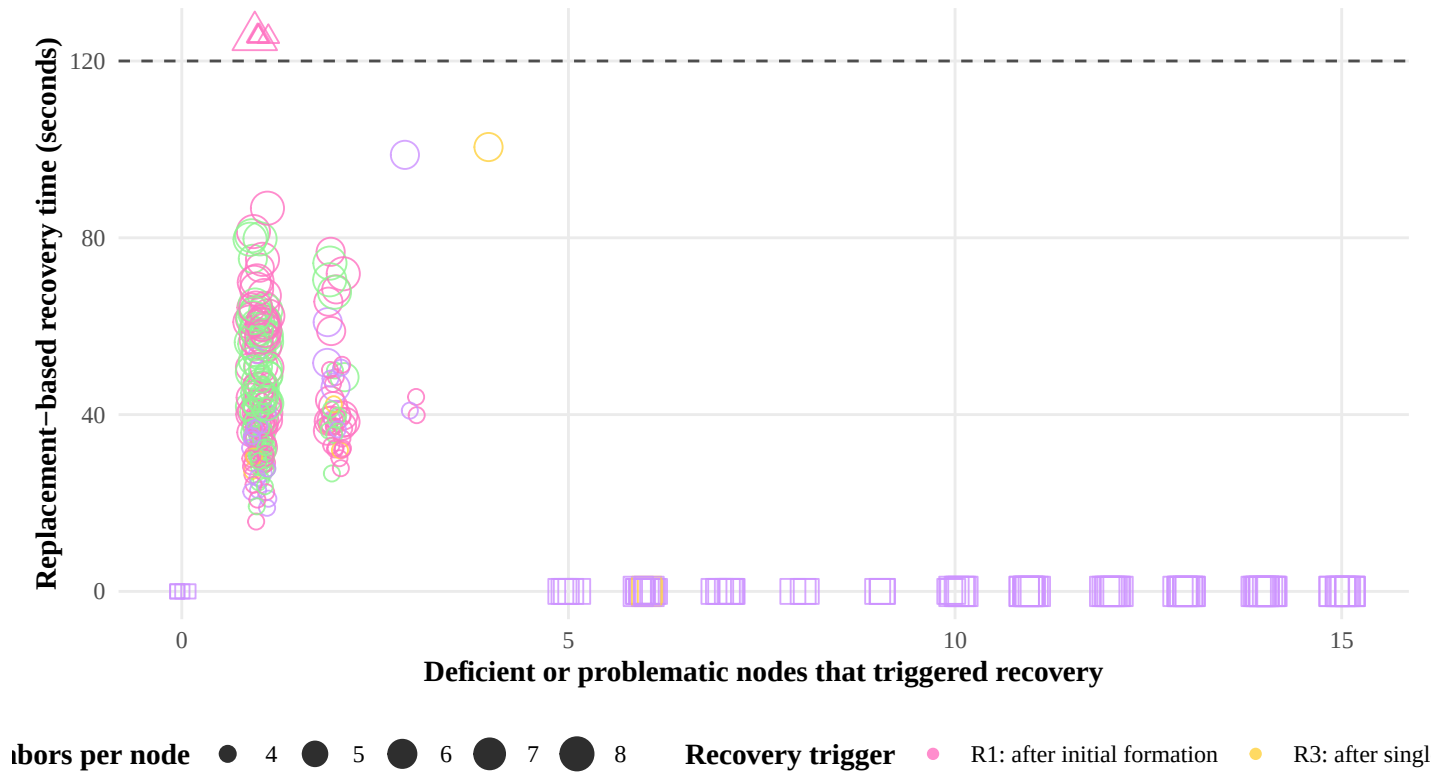

8 Problematic Nodes in Failed Main Phases


8.1 Phase 1: Initial Network Formation

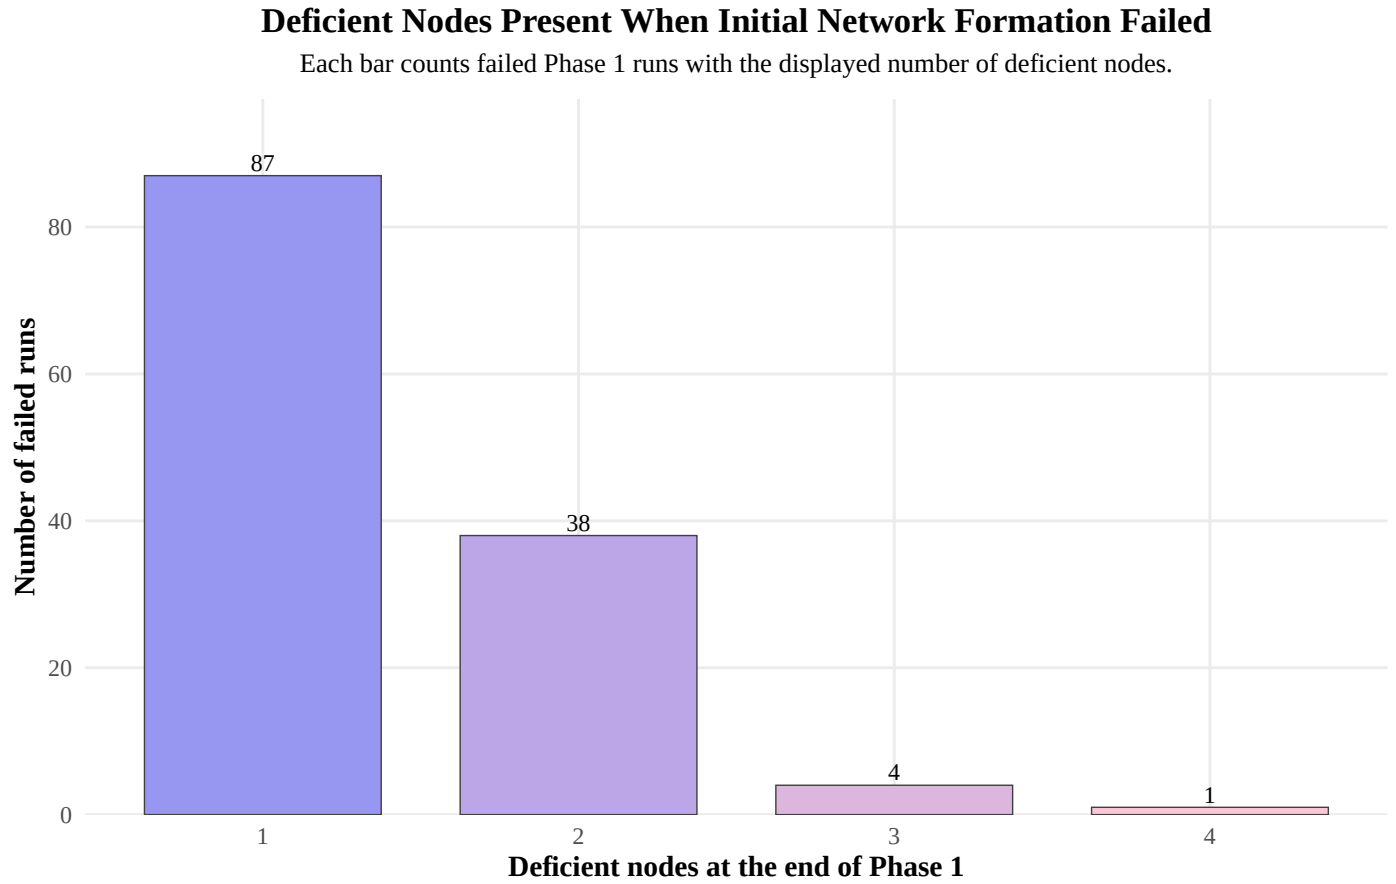


8.2 Phase 3: Repair After One Node Failure

Deficient Nodes Remaining When Single-Node Failure Repair Failed

Each bar counts failed Phase 3 runs with the displayed number of deficient nodes.

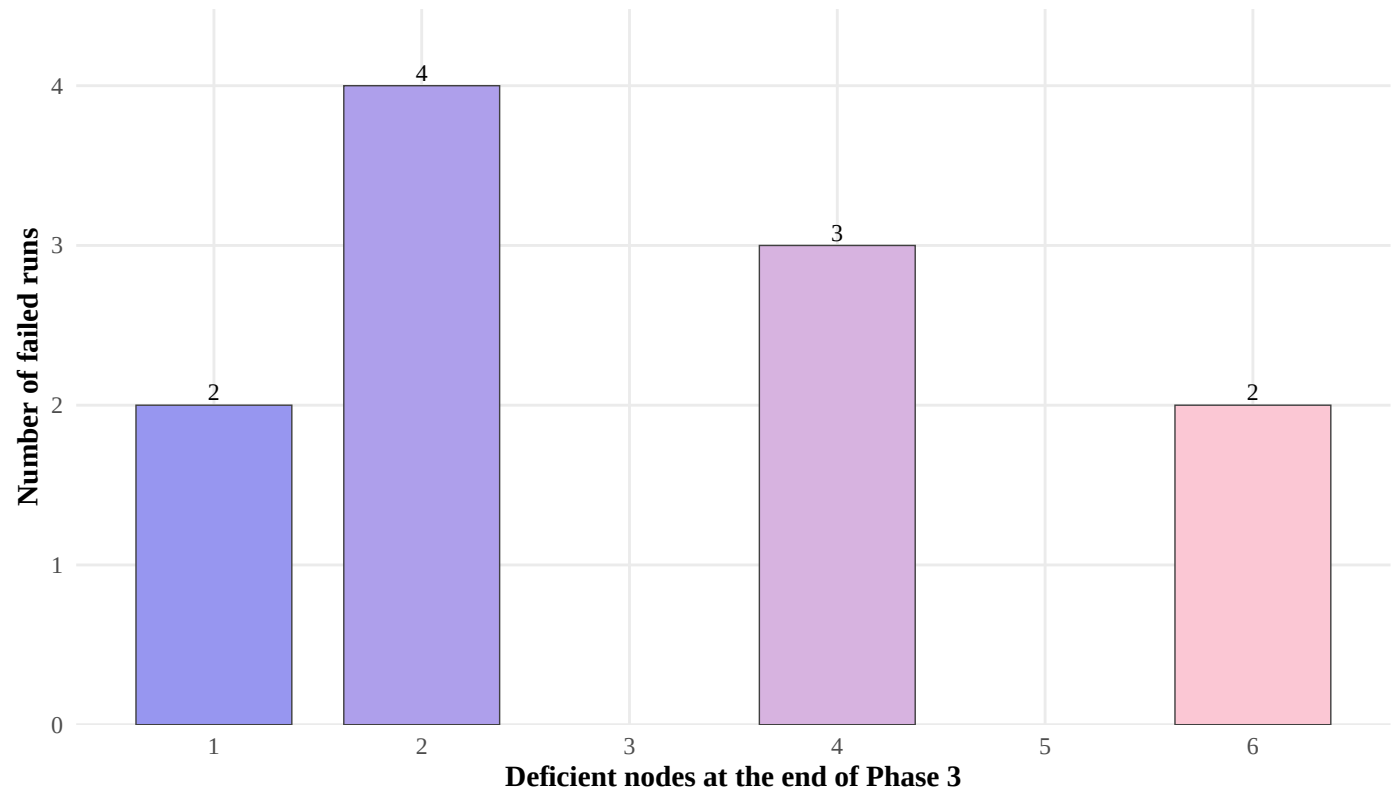


8.3 Phase 4: Adding Nodes

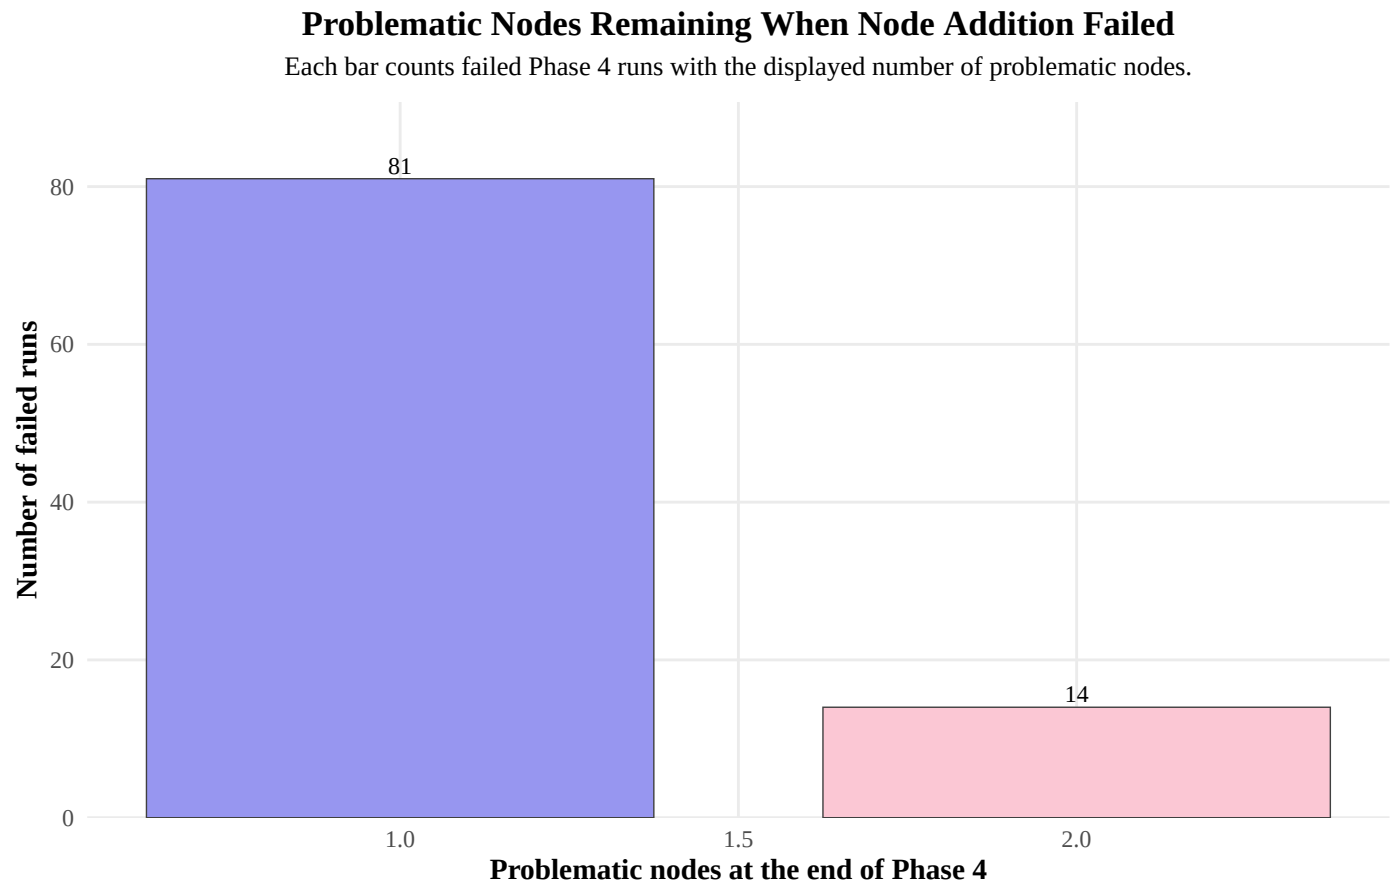

8.4 Phase 5: Repair After Multiple Node Failures

Problematic Nodes Remaining When Multiple-Node Failure Repair Failed

Each bar counts failed Phase 5 runs with the displayed number of problematic nodes.

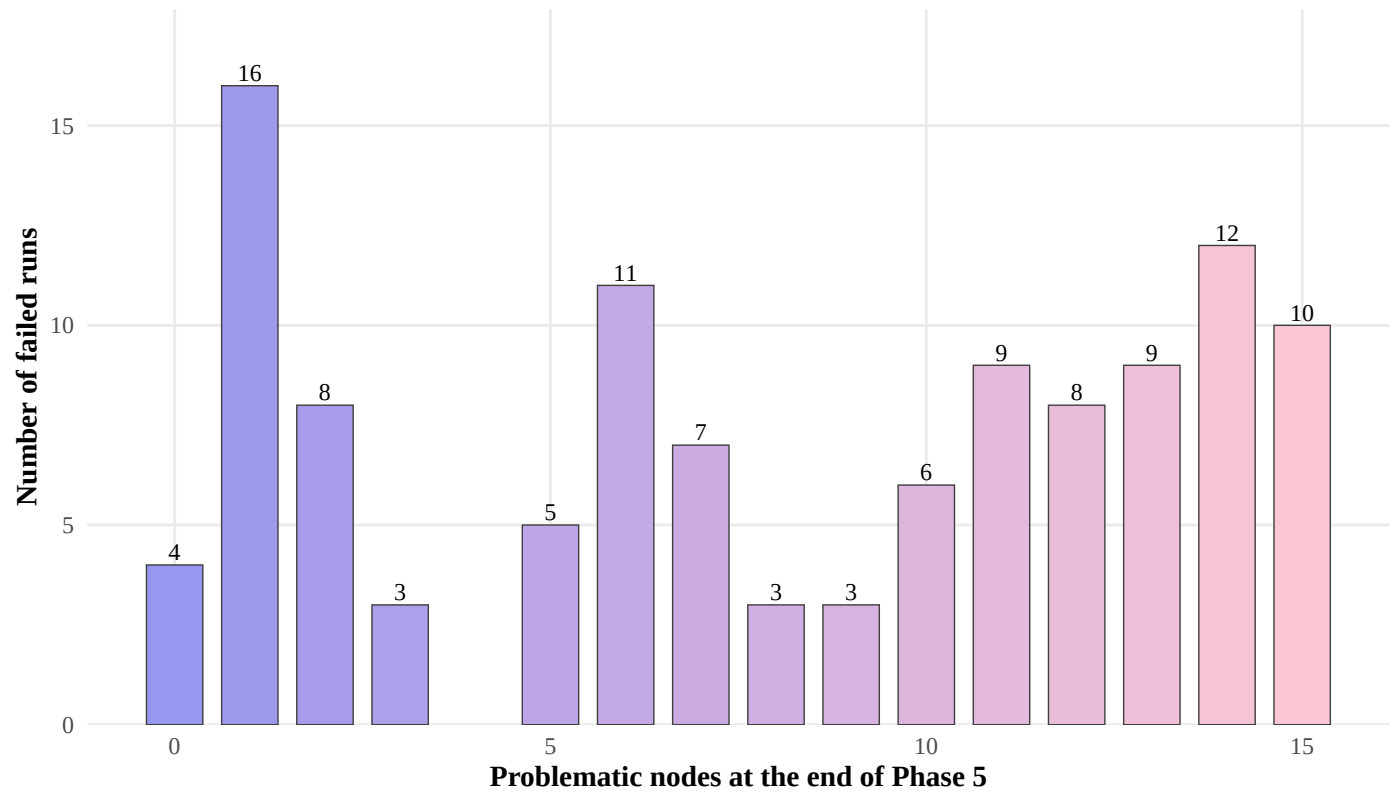

9 Replacement-Based Recovery Success Rates

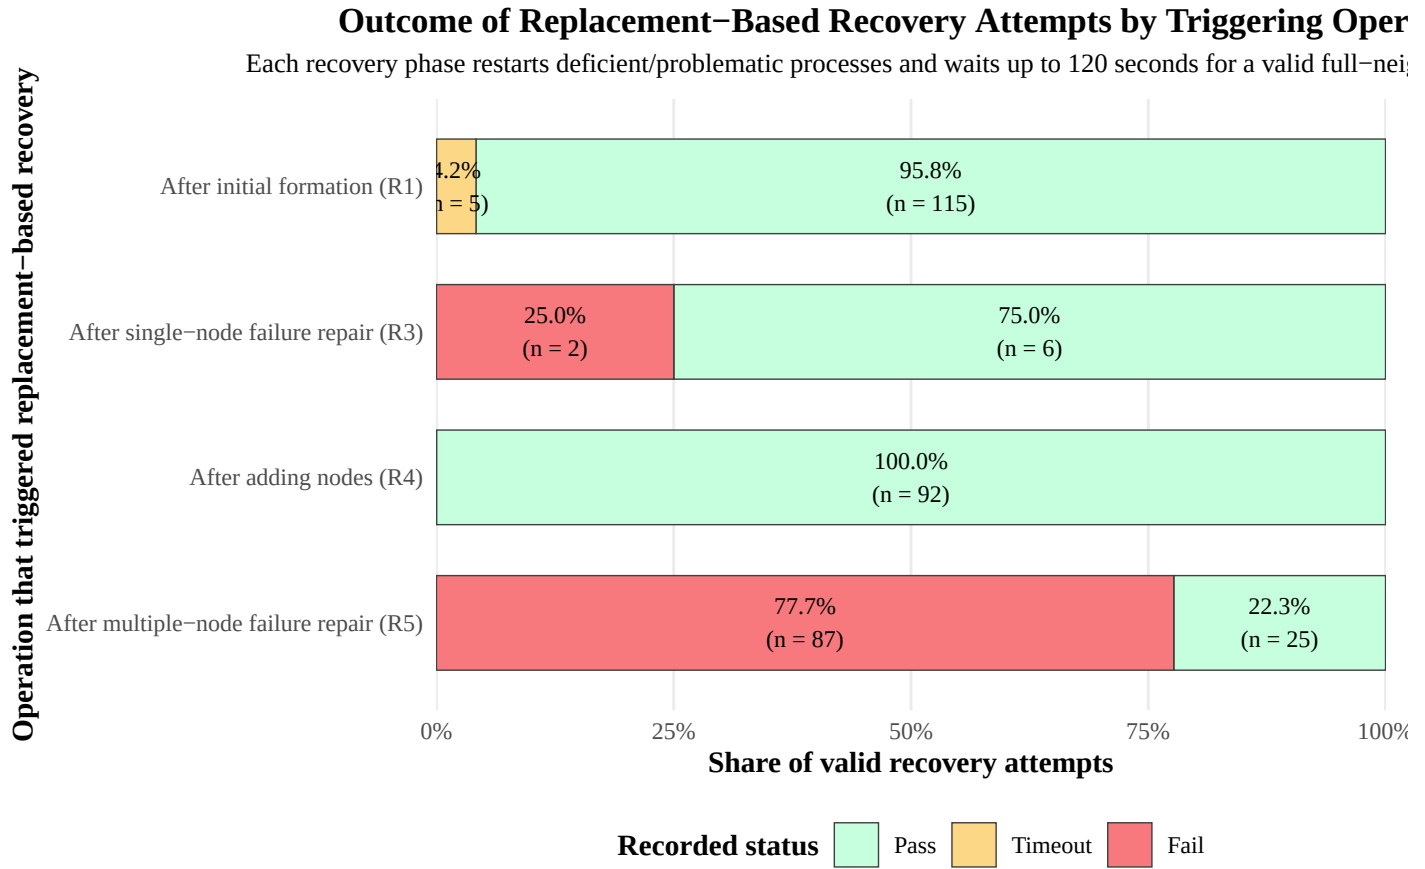


Table 3: Valid replacement-based recovery attempts after timeout filtering.

phase	attempts	passes	timeouts	failures	success_rate
R1	120	115	5	0	0.958
R3	8	6	0	2	0.750
R4	92	92	0	0	1.000
R5	112	25	0	87	0.223