

A Benchmark-Integrity Audit Protocol for Conformal Battery State-of-Health Evaluation: Recent-Label Dependence, Schema-Bundle Sensitivity, and Threshold-Decision Risk

Qingsong Shan^{a,1}, Qianning Liu^{a,2,*}

^a*Jiangxi University of Finance and Economics, School of Statistics and Data Science, Key Laboratory of Data Science in Finance and Economics, Nanchang, China,*

Abstract

Conformal intervals for lithium-ion battery state-of-health (SOH) inform maintenance decisions, but cross-dataset validation can conceal measurement conditions. We develop a six-gate benchmark-integrity audit of prediction-time information, split integrity, cell-block uncertainty, schema controls, threshold decisions, and localization sensitivity. Twelve analyses use 13,831 eligible records from 13,876 CALCE, NASA, and Oxford observations. A pooled-domain, cell-held-out baseline reaches 94.8% coverage (cell-block lower bound 94.2%). Across six cross-dataset tasks, method-matched removal of the most recent measured SOH yields statistically supported coverage reductions in 5 tasks, by as much as 60.4 percentage points; the remaining task and pooled-domain baseline are compatible with no effect. The as-used schema bundle changes leave-NASA coverage by -12.0 percentage points and false acceptance by +100.0 percentage points at the illustrative SOH cutoff 0.90 (exact paired-cell $p=9.54e-07$); an independent control bounds this as a bundle-level association. A localized-residual comparator recovers one point-coverage failure but establishes no shift-robust guarantee. Each gate couples evidence requirements to claim bounds, yielding an executable pre-submission check demonstrated on three public battery benchmarks; detection performance remains unestablished.

Keywords: conformal prediction, uncertainty quantification, battery state-of-health, prognostics and health management, predictive maintenance, benchmark integrity, distribution shift

*Corresponding author

Email addresses: shanqingsong@jxufe.edu.cn (Qingsong Shan), liuqianning@jxufe.edu.cn (Qianning Liu)

¹Open Researcher and Contributor Identifier (ORCID): 0000-0001-9231-5699

²Open Researcher and Contributor Identifier (ORCID): 0000-0002-7654-6451

1. Introduction

Data-driven prognostics and health management increasingly supplies the evidence on which maintenance and serviceability decisions rest, and closing the gap between research practice and trustworthy deployment is a recognized priority for the reliability community [1, 2]. Lithium-ion battery state-of-health (SOH) estimation is a flagship case: high-impact data-driven estimators are routinely evaluated on public cycle-level datasets [3, 4], uncertainty quantification is now treated as a first-class evaluation criterion for such models [5, 6], and conformal prediction — with its finite-sample coverage guarantee — is entering reliability-engineering and battery pipelines directly [7, 8, 9]. Because SOH intervals feed threshold decisions about maintenance, replacement, and second-life use, interval miscalibration has direct decision consequences [10, 11, 12].

SOH uncertainty estimates are often evaluated through cross-dataset benchmarks, where a model calibrated on one collection is tested on another — a realistic proxy for the domain shift that deployed prognostics faces [13]. In maintenance- and reliability-facing uses, it is tempting to read those intervals as evidence that threshold decisions remain trustworthy under protocol shift. Yet dataset composition and feature choices, rather than model quality, can drive reported battery-prognostics performance [14, 15], and the reliability of machine-learning evidence is itself an engineering quantity that requires pre-deployment assessment [16]. This paper argues that the cross-dataset reading is not warranted unless the benchmark itself is audited as a measurement instrument and the information available at prediction time is stated explicitly.

This paper consolidates that audit into an explicit, governed protocol and demonstrates it on real cycle-level SOH records from the Center for Advanced Life Cycle Engineering (CALCE), the National Aeronautics and Space Administration (NASA), and Oxford. The demonstration bounds external validity to these collections and centers a reliability-engineering question that current evaluation practice leaves implicit: how much of the apparent validity of conformal SOH evidence depends on access to the most recent measured SOH, and what remains interpretable after schema, protocol, and decision-level checks?

Two bodies of work bear directly on this question, but neither audits the benchmark itself. Conformal methods in reliability engineering and battery state estimation concentrate on producing or adapting predictive intervals [7, 17, 8, 18, 9], while transfer and domain-generalization methods concentrate on making estimators survive distribution shift [13, 19, 20]. Non-exchangeability theory bounds how far conformal coverage can drift [21, 22], but it does not identify which measurement-validity channel a particular benchmark contains. Within the literature reviewed in Section 2, no integrated protocol treats a conformal SOH benchmark itself as the object of reliability analysis. This is the gap addressed here.

The main contributions of this paper are as follows:

1. It defines a benchmark-integrity audit protocol whose six governed gates cover the prediction-time information set, split integrity, cell-aware uncertainty, schema negative controls, threshold-decision consequences, and localization sensitivity.
2. It quantifies recent-SOH access as a load-bearing, task-dependent measurement condition, separating a method-selection ablation from method-matched, row-matched contrasts.
3. It audits as-used schema-bundle sensitivity with multiplicity-adjusted intervals and an independently permuted-feature negative control, showing how the control gate confines bundle effects to a bounded sensitivity warning instead of a spurious field-specific mechanism claim.
4. It reports a corrected leave-NASA (LNAS) schema-bundle false-acceptance increase of +100.0 pp at threshold 0.90 (exact paired-cell $p = 9.54\text{e-}07$; 21 effective cells and 1127 records), linking interval behavior to threshold-decision risk under the bundled, noncausal interpretation.
5. It bounds residual sensitivity with a localized-residual comparator envelope, distinguishing empirical recovery from a formal covariate-shift guarantee.

The intended takeaway is operational: raw cross-dataset conformal coverage becomes battery SOH reliability evidence only after the benchmark’s prediction-time information, split construction, controls, and decision consequences have been audited — and the protocol developed here makes that audit concrete and executable.

The remainder of the paper is organized as follows. Section 2 reviews related work on conformal prediction, battery SOH uncertainty, and benchmark integrity. Section 3 defines the audit design, its provenance, and its claim boundaries. Section 4 reports evidence on recent-label dependence, schema-bundle sensitivity, residual drift, decision consequences, and localized calibration. Section 5 discusses implications and limitations, and Section 6 gives concluding remarks.

2. Related Work

2.1. Conformal prediction: guarantees and their boundary conditions

Conformal prediction provides finite-sample predictive-coverage guarantees under exchangeability [23, 24, 25]. Conformalized quantile regression calibrates quantile-regression estimates to retain finite-sample coverage [26], and weighted conformal variants extend the guarantee to covariate shift when the shift mechanism can be estimated [27]. The boundary conditions of these guarantees are now well mapped. When calibration and test data are dependent or non-exchangeable, coverage deviates by an amount that theory can bound but not eliminate [21, 22], and ensemble batch prediction intervals extend conformal thinking to dependent time series [28]. Online and adaptive variants track arbitrary distribution shifts, but they require sequential feedback after each

prediction [29, 30], which a one-shot cross-dataset evaluation does not provide. A parallel line sharpens the distinction between marginal and conditional validity: exact conditional coverage is unattainable in general, and localized or reweighted calibration offers only partial remedies [31, 32, 33]. Conformal risk control generalizes coverage to other monotone risks, including decision-relevant error rates, with non-exchangeable extensions [34, 35].

These guarantees do not by themselves certify a reliability benchmark. If the information set includes recent labels, dataset identity, or bookkeeping fields unavailable in the intended decision setting, nominal coverage can describe the constructed benchmark rather than the intended threshold-decision problem. The localized-residual analysis used in this paper is a diagnostic inspired by this literature, not an implementation of density-ratio weighted conformal prediction.

2.2. *Uncertainty-aware battery SOH and remaining useful life prognostics*

Battery SOH and remaining useful life (RUL) studies have long reported probabilistic forecasts and prognostic performance under uncertainty [36, 37, 38], and real-application SOH estimation has a mature methodological literature [39]. Within the reliability-engineering literature specifically, data-driven battery prognostics is a flagship application: high-impact estimators define the benchmark conventions on CALCE-, NASA-, and Oxford-style cycle datasets [3, 4, 40], and an explicitly uncertainty-aware thread now reports quantile intervals validated on the same public datasets [41], Bayesian-calibrated SOH uncertainty under deployment shift [42], probabilistic degradation-trajectory health assessment [43, 44], and recent dynamical-model variants [45]. Label scarcity at deployment is a recognized constraint in this literature: adaptive prediction with few or no in-service capacity labels is studied as its own problem [46, 47], which makes the availability of a recent measured SOH a substantive modeling assumption rather than a technicality. Dedicated benchmarks and reviews now treat uncertainty quantification as a first-class evaluation criterion for deep-learning prognostics [5, 2, 6, 48].

Conformal prediction itself has entered this application class in three roles. It produces calibrated RUL and degradation intervals [7, 49, 8, 18, 9], adapts interval inference to corrupted inputs or engineering-design uncertainty [17, 50], and supports anomaly detection or width-aware calibration [51, 52]. Related industrial time-series work also documents the exchangeability violations that motivate such adaptations [53]. These methods improve or diagnose interval estimators, but they largely take the evaluation benchmark as given. That presupposition is precisely what the present audit tests.

2.3. *Cross-dataset evaluation, transfer, and domain shift in prognostics and health management*

Transfer research likewise pursues several remedies for distribution shift. Domain-adaptation methods move SOH or RUL estimators across batteries,

operating profiles, and laboratory or field domains [54, 55, 56, 13, 19, 57]. Condition-aware and domain-generalization methods target fleet or protocol variation [58, 20], while adjacent reliability work mitigates shift in data-driven risk assessment [59]. This literature is remedy-side: it seeks models that survive shift and treats the benchmark schema as a fixed prerequisite for comparison. The present paper takes the complementary audit-side view: before asking whether a model transfers, it asks whether the benchmark’s own construction — its information set, splits, feature schema, and decision endpoints — supports the reliability conclusion being drawn.

2.4. Benchmark integrity, leakage, and evaluation validity

Machine-learning reliability research warns that apparent predictive performance can be driven by unintended signals, undocumented data provenance, or data-splitting and feature-availability choices [60, 61, 62]. The battery and PHM literatures now contain concrete instances: feature selection can produce misleading battery-lifetime predictions [15], training-set size and composition — rather than model class — can drive reported capacity-estimation accuracy [14], explainability analysis reveals which features an SOH model actually exploits [63], and open benchmark suites codify the feature schemas whose integrity this paper audits [64]. Within reliability engineering, an evaluation-validity genre is emerging: simple baselines can expose what domain-shift benchmarks actually measure in condition monitoring [65], and pre-deployment reliability assessment of machine-learning evidence is treated as its own engineering problem [16].

This paper connects these threads. Within the literature reviewed above, we did not find an integrated audit protocol that treats a conformal SOH benchmark itself as the object of reliability analysis. The unit of analysis here is the benchmark evidence — how conformal interval behavior and threshold decisions change across recent-label, split, schema-bundle, residual-drift, and SOH-threshold diagnostics. The protocol integrates these diagnostics into six gates, each with an explicit evidentiary requirement and a consequence that bounds the admissible claim when the gate fails.

3. Methodology

The methodological contribution of this paper is a governed benchmark-integrity audit protocol for conformal SOH evidence. Table 1 defines its six gates: each names the measurement condition examined, the evidence required, and the consequence of failure. The protocol consolidates a sequence of completed diagnostic analyses whose component decision rules were documented in their corresponding experiment plans before those analyses were executed. The six-gate synthesis was developed after that diagnostic program and is not presented as a prospectively registered protocol. A gate failure bounds the resulting claim rather than terminating the analysis; this design allows negative and heterogeneous findings to remain informative instead of being discarded.

Table 1: Governed benchmark-integrity audit protocol for conformal SOH evidence. Each gate names the measurement condition examined, the evidence required, and the consequence of failure applied in this audit.

Gate	Evidence required	Consequence of failure
G1 Information set	State whether recent measured SOH or another oracle label is available at prediction time	No claim for settings without recent labels
G2 Split integrity	Verify task-appropriate disjoint training, validation, calibration, and test indices; require cell-disjoint histories where the task claims cell-level holdout	Treat coverage as split-contingent
G3 Uncertainty units	Report cell-block uncertainty rather than row-level iid intervals	Treat uncertainty as optimistic
G4 Schema sensitivity	Compare schema contrasts with an independent permuted-feature control and multiplicity adjustment	Bundle-level warning; no mechanism claim
G5 Decision consequences	Report threshold false acceptance and false rejection with record denominators, effective cell counts, and sparse-cell flags	Do not promote coverage to serviceability evidence
G6 Localization sensitivity	Compare standard and localized calibration as a sensitivity envelope	Failure: no empirical recovery; apparent success: point-coverage sensitivity only. Neither outcome authorizes a shift-robust claim without a guarantee-bearing method and verified assumptions

The remainder of this section instantiates the protocol on real cross-dataset battery evidence.

The reported evidence is organized around governed diagnostic analyses rather than selective numerical filtering. A scripted results table aggregates the outputs used for the manuscript, and the reported values are taken from that table. All active rows are real battery state-of-health (SOH) records from CALCE, NASA, and Oxford [66, 67, 68]; no synthetic records are included in the reported evidence. The audited object is the benchmark evidence produced by these public cycle-level datasets; the protocol itself, not a new battery-management algorithm, is the methodological contribution. The 12 completed diagnostic analyses are a pooled-domain, cell-held-out coverage baseline, a recent-label ablation, a cross-protocol transfer diagnostic, a residual-bias screen (tests whether calibration residual signs vary systematically with cycle position), a host-timing screen (tests whether results shift with the wall-clock execution host), a negative-control check, a method-family comparison, a threshold decision-utility audit, a schema-cleaning audit, a hard-regime audit, the schema-to-decision audit, and a localized-residual comparator. Supplementary Tables S1–S2 map every analysis to its gate, task, feature schema, method family, parameter grid, selection rule, seed, plan identifier, governed rerun, and deviation record. The archived plans and regeneration sources are fixed at public replication commit 42f1120ed1f5cbc0282a706ebd4bec24a8d19d6e.

Table 2: Real battery datasets after preprocessing. Rows are source/eligible; every eligible row has an earlier same-cell SOH record.

Dataset	Cell platform	Cycling / temperature	Cells	Rows	SOH range
CALCE	CS2/CX2 prismatic, LiCoO ₂ , 1.10/1.35 Ah	CS2: CC-CV charge; selected CS2/CX2: 0.5C/1C discharge; temperature absent	12	11,604/11,592	0.40–1.01
NASA	Multi-batch Li-ion cells; archive nominal 2 Ah; cathode not consistently encoded	Charge/discharge/EIS; retained metadata span 4–43 °C	25	1,753/1,728	0.41–1.00
Oxford	Kokam SLPB533459H4 pouch, 0.74 Ah	CC-CV charge; ARTEMIS urban-drive discharge; chamber 40 °C	8	519/511	0.62–1.00
Total	Three public laboratory platforms	Heterogeneous protocols and measurement conventions	45	13,876/13,831	0.40–1.01

The physical case spans three laboratory platforms rather than one nominally homogeneous fleet. The CALCE subset contains six CS2 and six CX2 small prismatic cells with LiCoO₂ cathodes and capacity ratings of 1.10 and 1.35 Ah. The archive documents constant-current/constant-voltage charging for CS2 and 0.5C or 1C constant-current discharge for the selected CS2/CX2 cells; the retained row files do not encode ambient temperature [66]. The NASA subset contains 25 Li-ion cells from multiple Prognostics Center of Excellence batches; the repository describes charge, discharge, and impedance profiles for nominal 2-Ah cells, and the retained metadata spans 4, 22, 24, and 43 °C, but does not consistently encode cathode chemistry [67]. Oxford contributes eight 740-mAh Kokam pouch cells aged in a 40 °C chamber with constant-current/constant-voltage charging and an ARTEMIS urban-drive discharge profile [68]. These differences make label and protocol comparability part of the audit boundary rather than a solved preprocessing detail. Table 2 summarizes the 45-cell source evidence base of 13,876 cycle rows and the 13,831 rows eligible for a strictly prior recent-SOH feature.

The seven evaluation tasks use the same model families but change the target-domain role. Leave-domain-out tasks fit, select, and calibrate on the other two domains and test on all eligible rows of the named held-out domain. Target-recalibrated tasks add early target-domain rows: progress 0–20% enters training, 20–35% calibration, 35–55% validation, and rows after 55% form the test set. These boundaries are pairwise disjoint. Table 3 reports the resulting row counts; the held-out target contains 12 CALCE, 25 NASA, or 8 Oxford cells, while Main uses 10 test cells. Main is a pooled-domain within-benchmark baseline: all three datasets contribute to fitting and test sets, while cell identities remain disjoint; it is not a single-physical-protocol validation.

The Main row counts follow governed cell partitions and the progress windows specified below. Leave-domain tasks reuse those partitions after restricting training, calibration, and validation to non-target domains; consequently, their source-domain rows need not sum to every eligible source-domain row in Table

Table 3: Operational task construction and row counts for training, calibration, validation, and testing.

Task	Construction	Test cells	Train/Cal/Val/Test rows
Main	Cell-disjoint mixed-domain held-out split	10	7961/880/680/2323
LCAL	Other domains to all CALCE rows	12	1122/241/116/11592
TCAL	Other domains + early CALCE to late CALCE	12	4566/1754/2344/5167
LNAS	Other domains to all NASA rows	25	7082/664/636/1728
TNAS	Other domains + early NASA to late NASA	25	12447/279/322/783
LOxf	Other domains to all Oxford rows	8	7718/855/608/511
TOxf	Other domains + early Oxford to late Oxford	8	13421/71/106/233

2. Target-recalibrated boundaries are time-forward and pairwise row-disjoint.

Main is a seed-42, domain-stratified cell split, not a within-cell forecasting split. Within each domain, shuffled cells are assigned 55%/20%/10%/remainder to training/calibration/validation/test; calibration retains progress at most 0.55 and test retains progress at least 0.35. The four cell sets are disjoint, and no test cell contributes an earlier row to model fitting, selection, or calibration. The complete cell membership is recorded below; the governed split manifest preserves row indices and its checksum.

Complete Main split membership (domain entries are row counts).

Train (7,961 rows; CALCE 6,839; NASA 879; Oxford 243): CALCE_CS2_33, CALCE_CS2_36, CALCE_CX2_33, CALCE_CX2_34, CALCE_CX2_36, CALCE_CX2_38, NASA_B0007, NASA_B0025, NASA_B0026, NASA_B0028, NASA_B0029, NASA_B0031, NASA_B0042, NASA_B0043, NASA_B0048, NASA_B0053, NASA_B0054, NASA_B0055, NASA_B0056, Oxford_Cell1, Oxford_Cell3, Oxford_Cell4, Oxford_Cell6.

Cal (880 rows; CALCE 639; NASA 216; Oxford 25): CALCE_CS2_35, CALCE_CS2_38, NASA_B0006, NASA_B0027, NASA_B0045, NASA_B0046, NASA_B0047, Oxford_Cell5.

Val (680 rows; CALCE 564; NASA 44; Oxford 72): CALCE_CS2_37, NASA_B0032, NASA_B0051, Oxford_Cell2.

Test (2,323 rows; CALCE 1,968; NASA 255; Oxford 100): CALCE_CS2_34, CALCE_CX2_35, CALCE_CX2_37, NASA_B0005, NASA_B0018, NASA_B0030, NASA_B0044, NASA_B0049, Oxford_Cell7, Oxford_Cell8.

For cell i and recorded cycle t , **prev_soh** is $SOH_{i,t-1}$: the immediately preceding recorded same-cell capacity-SOH after sorting by dataset, cell identifier, and cycle index. The $t-1$ measurement must occur before the prediction event at t . Each cell’s first row has no such measurement and is excluded before every split is constructed (45 rows in total); no same-row target fill or other imputation is used. Thus recent-SOH is an oracle only in the sense that it assumes a previous capacity measurement is actually available at prediction time, not because it accesses $SOH_{i,t}$.

The primary nominal coverage level is 90%. The manuscript reports coverage, width, dependence-aware uncertainty, threshold decision utilities, schema diagnostics, and localized-residual comparator outcomes from the scripted results table. Before the schema-to-decision analysis was executed, its experiment plan defined five contrasts across seven tasks and seven endpoints: one cover-

age endpoint plus the predeclared SOH thresholds 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, giving 245 tests. Coverage and false-acceptance deltas in Tables 5 and 6 use Bonferroni-adjusted, SE-based normal intervals from 1000 cell-block resamples; the family-wise level 0.05 gives a per-test level near 2×10^{-4} and $z \approx 3.7$. Zero-SE boundaries use the exact paired-cell sign test. By contrast, the Main 94.2%–97.1% interval and the lower bounds in Table 8 are 2.5/97.5-percentile cell-block bootstrap intervals, while Table 7 reports uncorrected 95% cell-block normal intervals. The limited number of battery-cell blocks makes extreme-tail normal widths uncertain; this is an additional reason to treat coverage flags as sensitivity signals and require a negative-control gate. The same data interface generates text, tables, and captions to avoid manual transcription.

The nominal target is used as the evaluation criterion, while individual conformal variants select their calibration quantiles strictly on a disjoint validation split (never tuned on the test set). For the pooled-domain, cell-held-out diagnostic baseline, the selected operating point uses q-level 0.93. This yields a realized test coverage of 94.8%; the benign validation-to-test over-coverage is not treated as a new performance claim, but as the baseline’s ‘apparent reliability’ before domain shift or artifact removal, setting the reference for subsequent measurement-validity checks relative to the 90% coverage target.

Persistence-anchor behavior is used as a diagnostic probe because it exposes recent-label and anchor dependence. It is not presented as a deployable or superior method. Cross-protocol failures are interpreted as validity evidence, not as a failed attempt to force a positive transfer claim. The analysis therefore treats negative and heterogeneous findings as informative: a failure after schema cleaning is evidence consistent with residual protocol drift, while a small, directionally heterogeneous, or control-inconsistent schema effect bounds the claim rather than generalizing it. Residual drift is retained as a boundary that is not fully separable from recent-label dependence in this evidence base.

The audit examines four diagnostic dimensions:

1. recent-label / anchor dependence;
2. as-used schema-bundle sensitivity;
3. residual protocol drift after schema checks;
4. SOH serviceability-threshold decision risk under finite-cell evidence.

The Main pooled-domain, cell-held-out diagnostic baseline is the selected persistence-anchor protocol Mondrian conformal predictor [23]; the split-conformal constructions and coverage definitions follow standard practice [25]. The diagnostic families include quantile regression (QR), conformalized quantile regression (CQR) [26], and natural-gradient boosting (NGBoost) [69]. For the no-recent-SOH ablation condition, the selected diagnostic is a gradient-boosting domain-Mondrian conformal variant, a group-conditional calibration construction suited to settings where exchangeability across domains is not credible [21]; it is used only to quantify the dependence of the benchmark on recent-label access and is not presented as a method contribution. Because the

calibration-selection rule, not the analyst, chooses the per-condition operating point, the full-feature and no-recent-SOH conditions can select different conformal families; the resulting pooled-domain coverage change therefore reflects the selection rule’s response to removing recent labels rather than a same-method feature ablation, and the method-matched feature-isolation contrast is supplied separately by the row-matched recent-label reference comparison reported in Section 4. Gradient-boosting CQR is used for decision-utility diagnostics, schema comparisons, and the localized-residual comparator. Training, validation, calibration, and test indices are pairwise disjoint per task. The as-used bundle contains `source_row_id`, `target_cycle_index`, and the permuted control column, whereas the clean-original schema removes all three; the bundle contrast therefore cannot isolate a bookkeeping-specific effect. The independent control adds a fixed-seed (seed 1033) permutation of `log_cycle_index` to the clean schema and refits the complete pipeline on the same rows. This control uses one permutation draw ($B = 1$), not a sampled permutation null distribution; it is therefore used only as a veto on mechanism attribution.

A decision-risk cell is defined relative to a capacity-SOH serviceability threshold and a predicted SOH interval with lower bound L and upper bound U for a test record with true SOH y . The record is threshold-acceptable when its lower bound L is at or above the threshold, threshold-unacceptable when its upper bound U is below the threshold, and uncertain when the interval straddles the threshold. A false-acceptance event is a threshold-acceptable record whose true SOH y is below the threshold; a false-rejection event is a threshold-unacceptable record whose true SOH y is at or above the threshold. The reported false-acceptance rate divides false-acceptance events by the number of actually threshold-unacceptable records, the false-rejection rate divides false-rejection events by the number of actually threshold-acceptable records, and the uncertain rate divides uncertain records by all records; each rate carries a cell-block bootstrap confidence interval that resamples battery cells with replacement. When every contributing cell block contains zero events, that bootstrap has zero empirical variance; the table therefore marks the interval as bootstrap-degenerate rather than displaying a zero-width confidence interval. Such a boundary is not evidence of zero underlying risk. Auditing these monotone decision risks alongside coverage follows the same motivation as conformal risk control, which generalizes coverage guarantees to decision-relevant error rates [34]. These thresholds are capacity-based decision cutoffs, not demonstrated electrochemical or thermal safety boundaries. To avoid over-reading sparse cells, a small-denominator suppression rule flags any decision cell whose denominator is below 5 as exploratory rather than as a headline rate.

Schema-bundle sensitivity is adjudicated by a rule documented before the schema-to-decision analysis and applied identically to every task. A task is flagged when the as-used-minus-clean coverage interval excludes zero and the absolute delta is at least 3 pp. This flag is necessary but not sufficient for a mechanistic claim: the independent permuted-feature control must remain null

across both its coverage contrast and all six false-acceptance endpoints. The bundle’s false-acceptance-rate delta is evaluated separately with multiplicity adjustment or, for zero-standard-error boundaries, an exact paired-cell sign test; cells below 5 effective observations are exploratory. This hierarchy prevents a bundled association from being relabeled as a bookkeeping mechanism, while still allowing a corrected bundle-level decision association to be reported without field-specific attribution.

Two dependence boundaries are explicit. First, the conformal calibration objects are cycle-level residuals from longitudinal cell records, so the usual exchangeability interpretation is conditional on the task construction rather than a free guarantee for independent operating histories; under such dependence, split-conformal coverage is expected to deviate from nominal by an amount that theory bounds but does not eliminate [22, 28]. The uncertainty intervals therefore resample cells as blocks and are read as dependence-aware diagnostics, but the present evidence does not replace a fully cell-independent prospective forecasting design. Second, recent-SOH is treated as an oracle recent label in the main dependence probe: it may be a legitimate autoregressive measurement in a laboratory setting where the previous capacity has just been measured, but it is not automatically available in an online battery-management setting. The audit therefore interprets recent-SOH access as a measurement condition to be declared, not as leakage in every possible deployment scenario.

The SOH label is capacity-normalized within the harmonized project data interface, following the conventions of published SOH benchmark suites on these datasets [64, 41], and Table 2 reports the ranges after quality assurance (QA). Because the source datasets differ in cycling protocol, temperature range, and capacity measurement practice, the analysis treats cross-dataset label comparability as part of the benchmark-validity boundary. The current manuscript does not establish a full label-harmonization audit over alternative denominators, smoothing rules, or anomaly-removal policies; such sensitivity analysis would be needed before attributing every cross-dataset coverage failure to physical protocol drift or model behavior.

Because a standard conformal failure is incomplete without a localization sensitivity check, the audit also evaluates a heuristic localized-residual CQR comparator in the spirit of localized conformal prediction [32]. Calibration and target features are standardized by calibration means and standard deviations. For target row x , calibration score r_i receives Gaussian weight $w_i(x) = \exp\{-d_i(x)^2/(2h^2)\} + 10^{-12}$, where d_i^2 is the mean squared standardized distance over the recorded common shift features. The local radius is the weighted conformal quantile. Bandwidth $h \in \{0.25, 0.50, 1, 2, 4, \infty\}$ is selected only on validation data by the predeclared coverage-first, then width, objective; test metrics are not used. This is motivated by covariate-shift conformal work [27], but it does not estimate a density ratio and carries no formal covariate-shift guarantee. Meeting the envelope means that point coverage reaches nominal; a lower-bound shortfall crosses only when the standard percentile lower bound is

Table 4: Gate-by-gate audit ledger. Later tables report interval estimates. Pass* denotes complete reporting with bounded interpretation; pp denotes percentage points.

Gate	Case evidence	Verdict	Claim bound
G1	Prior SOH declared; removal -60.4 pp in TCAL; TOxf +4.3 pp with interval including zero	Conditional	Exclude settings without prior labels
G2	Main cell-disjoint, governed source splits for leave-domain tasks, forward disjoint recalibration rows	Pass	Split-contingent
G3	Cell-block intervals, effective task count 8–25 cells	Pass	No row-iid precision
G4	LCAL/LNAS bundle effects, LNAS -12.0 pp, control non-null in LCAL/TCAL	Fail	Bundle only, no mechanism
G5	Both threshold errors, uncertainty status, cell/record counts, no sparse displayed cell	Pass*	Illustrative, not deployment rates
G6	TNAS recovers one point failure, Main/LCAL decrease, no lower-bound shortfall recovered	Bounded diagnostic	One point failure recovered; no lower-bound recovery or formal guarantee

below nominal and the localized lower bound is at or above it. The result is not interpreted as method superiority.

4. Results

This section reports what the audit protocol detects when applied to a cross-dataset conformal SOH benchmark; the engineering object is the reliability evidence produced by the benchmark, not a new SOH estimator. The decision question is how interval coverage and SOH threshold decisions change across recent-label access, split construction, feature-schema sensitivity, residual protocol drift, and localized residual weighting diagnostics.

The evidence base is a set of diagnostic contrasts over the same real-data benchmark splits. Task abbreviations use Main for the pooled-domain, cell-held-out task, leave-CALCE (LCAL), target-CALCE (TCAL), leave-NASA (LNAS), target-NASA (TNAS), leave-Oxford (LOxf), and target-Oxford (TOxf). Table 4 reports the argument-bearing contrasts needed to interpret reliability evidence; ancillary timing and residual-stress screens are treated as robustness checks rather than headline findings.

The Main baseline selected method is the persistence-anchor Mondrian conformal diagnostic. On the pooled-domain, cell-held-out task it reaches coverage 94.8% with CI 94.2%-97.1%, mean width 0.038, and sample size 2323. The ablation package performs a separate validation-only selection: its full-feature reference selects the persistence-anchor standard conformal diagnostic, with coverage 92.6% and mean width 0.027. Removing the recent-SOH feature changes that within-package selection to the gradient-boosting domain-Mondrian conformal diagnostic, with coverage 80.8% and mean width 0.221; relative to the stated ablation reference, the coverage change is -11.8 pp and the width increase is 0.193. These deltas therefore are not differences from the separately selected

Main baseline. Figure 1 summarizes the resulting audit logic: raw coverage is interpreted only after the measurement conditions are examined.

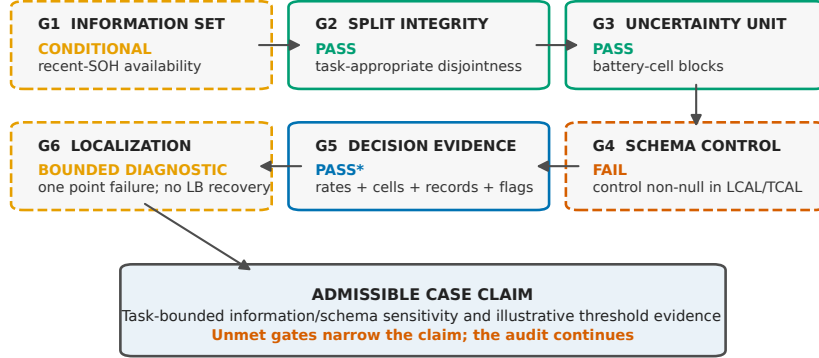


Figure 1: The six-gate benchmark-integrity audit converts an unmet evidence requirement into a narrower admissible claim rather than a stopped analysis. Case verdicts are shown inside the gates; dashed orange or vermilion borders mark conditional, bounded-diagnostic, or failed gates. Pass* means that G5’s reporting requirements are met while its serviceability interpretation remains bounded.

The cross-protocol diagnostics keep the result from becoming a simple method-success story. Same-split QR/CQR/NGBoost comparisons show that coverage can change only by changing the uncertainty family or accepting wider intervals; for example, in the main held-out task, CQR is coverage-aligned but has 2.72 times the persistence-anchor width. In the common-cycle, no-recent-label audit, coverage is 92.9% on Main, 29.5% on LNAS, and 3.1% on LOxf. These values demonstrate heterogeneity, not a universal monotone benefit of recent labels. On Main, the clean-original no-recent schema attains a coverage of 92.4%. Because the as-used no-recent schema is flagged as contaminated in two tasks, conclusions are based on the row-matched common-schema contrasts rather than the contaminated hard-regime rows. Ancillary host-timing and residual-bias screens are robustness checks only; they are not interpreted as hardware or physical-degradation evidence.

The method-matched recent-label delta is gradient-boosting CQR coverage under the common no-recent-SOH schema minus coverage with the recent-SOH reference, evaluated on identical task rows. This comparison is heterogeneous across tasks, which is central to the measurement-validity interpretation. Table 5 reports it beside the as-used schema-bundle contrast and its independent permuted-feature control.

The Control column in Table 5 displays the coverage endpoint. TCAL’s G4 control failure instead occurs at the illustrative SOH cutoff 0.85, where the clean-original minus fixed-seed permuted-control false-acceptance contrast is -

Table 5: Task-wise coverage sensitivity (pp; Bonferroni-adjusted cell-block normal intervals). Cells/rows gives effective cells and test records. Recent is no-recent minus recent-SOH; Bundle is as-used minus clean; Control is the permuted-feature contrast. G4 fails for any non-null control endpoint.

Task	Cells/rows	No-recent – recent	Bundle	Control	Flag	G4 control
Main	10/2323	+1.3 [-18.7, +21.4]	-4.1 [-21.6, +13.4]	-1.1 [-3.0, +0.7]	No	Pass
LCAL	12/11592	-10.1 [-16.8, -3.3]	+3.2 [+1.2, +5.1]	-0.6 [-1.0, -0.2]	Yes	Fail
TCAL	12/5167	-60.4 [-73.6, -47.2]	-2.2 [-6.9, +2.6]	-0.0 [-2.7, +2.6]	No	Fail
LNAS	25/1728	-31.9 [-40.7, -23.1]	-12.0 [-20.5, -3.4]	-1.0 [-2.0, +0.1]	Yes	Pass
TNAS	25/783	-41.5 [-73.4, -9.7]	-10.0 [-31.2, +11.2]	-0.1 [-1.6, +1.3]	No	Pass
LOxf	8/511	-37.6 [-53.1, -22.0]	+0.4 [-0.5, +1.3]	-0.2 [-1.0, +0.6]	No	Pass
TOxf	8/233	+4.3 [-1.6, +10.2]	+0.0 [+0.0, +0.0]	-0.4 [-2.1, +1.2]	No	Pass

26.4 pp [-52.1, -0.8] after Bonferroni adjustment. The largest method-matched recent-label contrast occurs in TCAL, where removing the recent-SOH reference changes coverage by 60.4 pp; LNAS changes by 31.9 pp. Across the six cross-dataset tasks, five adjusted intervals support coverage reductions; the TOxf estimate is positive but its interval includes zero, as does Main’s. The evidence therefore establishes task-dependent magnitudes, not a supported positive reversal. Because these comparisons hold the conformal family and task rows fixed, they isolate information-set sensitivity more cleanly than the selection-changing Main ablation described above. The Main ablation changes -11.8 pp, but its selection rule switches conformal families and therefore measures the response of the complete selection pipeline, not a same-method feature effect.

The as-used schema-bundle contrast passes the experiment-level coverage flag in 2 tasks: LCAL, LNAS. LNAS changes by -12.0 pp; its maximum standardized mean difference (SMD) falls from 7.15 in the raw schema to 1.32 in the common schema. However, the as-used bundle jointly changes `source_row_id`, `target_cycle_index`, and the permuted control column, while the independent permuted-feature control is also non-null in LCAL, TCAL. The documented claim gate therefore returns false. The contrast cannot isolate a bookkeeping-field effect. We interpret it only as a schema-bundle sensitivity warning that may combine schema identity, finite-cell structure, and residual shift. This negative-control failure blocks the stronger original artifact-mechanism story.

LNAS shows a multiplicity-adjusted schema-bundle false-acceptance increase of +100.0 pp at SOH threshold 0.90: the rate is 100.0% under the as-used schema and 0.0% under the clean schema over 1127 actually threshold-unacceptable records and 21 effective cells (exact paired-cell $p = 9.54e-07$). The bundle’s decision effect is directionally heterogeneous. The largest LCAL contrast is -100.0 pp at SOH 0.65 (0.0% as-used versus 100.0% clean; 1,936 records, 12 effective cells and 12 discordant cells; exact paired-cell $p = 0.000488$), which is in the risk-decreasing direction and does not survive the corrected criterion. Only LNAS passes correction, so the bundle cannot be described as uniformly risk-increasing. Table 6 reports the largest observed eligible contrast for each task, and the complete 245-contrast ledger remains in the machine-readable results archive. These are bundle-level decision associations, not isolated bookkeeping

Table 6: Largest eligible schema-bundle false-acceptance contrast by task (pp). As-used/clean gives the two base rates (percent); cells/rows gives the effective cell blocks and actually threshold-unacceptable records; discordant is the number of nonzero paired-cell differences. Intervals are Bonferroni-adjusted, and zero-SE cells show exact paired-cell p-values. Only LNAS passes correction.

Task	Delta [CI]	As-used/clean	SOH	Cells/rows	Discordant	Exact p	Corrected?
Main	+4.4 [-35.9, +44.6]	6.0/1.7	0.75	7/712	4	–	No
LCAL	-100.0	0.0/100.0	0.65	12/1936	12	0.000488	No
TCAL	+21.5 [-25.9, +68.8]	28.6/7.1	0.85	12/5036	9	–	No
LNAS	+100.0	100.0/0.0	0.90	21/1127	21	9.54e-07	Yes
TNAS	+45.8 [-19.8, +100.0]	97.6/51.7	0.75	14/288	8	–	No
LOxf	+0.0	0.0/0.0	0.90	8/342	0	1	No
TOxf	+0.0	0.0/0.0	0.90	8/233	0	1	No

effects or deployment-safety rates. Absolute decision risk must therefore also be read directly from Table 7. Figure 2 visualizes the task-dependent information-set and schema-bundle sensitivities.

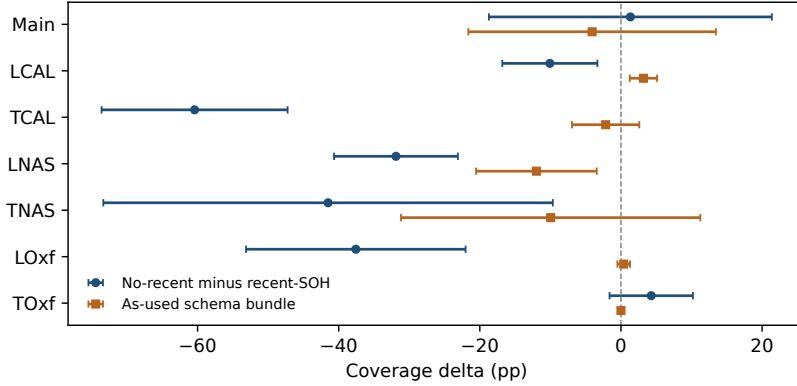


Figure 2: Per-task recent-label and as-used schema-bundle coverage deltas (percentage points) with Bonferroni-corrected normal intervals. Recent-label deltas are large and negative in several tasks; bundle deltas are smaller, with LCAL and LNAS meeting the coverage flag. The endpoint-wide negative-control gate fails in LCAL and TCAL. The dashed line marks zero.

Decision-utility rates are reported with denominators and cell-block intervals rather than as unqualified safety claims. Here, a false-acceptance event occurs when the actual SOH falls below the serviceability threshold but the predicted interval incorrectly implies threshold acceptability, while a false-rejection event occurs when an actually threshold-acceptable SOH is incorrectly flagged as threshold-unacceptable. Table 7 reports representative SOH threshold decision cells at threshold 0.80. The table illustrates why coverage alone is insufficient for a threshold-decision interpretation: the leave-NASA CQR cell has a lower false-acceptance point estimate but leaves a large uncertain region, whereas NGBoost has a high false-acceptance diagnostic. These thresholds and cells are illustrative boundary evidence, not deployment-safety rates; application use requires

Table 7: Illustrative threshold-0.80 decision cells (percent; uncorrected 95% cell-block CI). Here c/n gives effective cells/records; BD marks a bootstrap-degenerate all-zero boundary, and Sparse denotes any denominator below 5.

Task	Method	False acceptance	False rejection	Uncertain	Flag
Main	Persistence anchor	1.4 [0.1, 2.7]; $c=9$, $n=1270$	2.1 [1.1, 3.1]; $c=10$, $n=1053$	18.1 [12.0, 24.1]; $c=10$, $n=2323$	OK
Main	CQR	1.1 [0.0, 2.4]; $c=9$, $n=1270$	0.7 [0.0, 1.7]; $c=10$, $n=1053$	30.9 [12.4, 49.4]; $c=10$, $n=2323$	OK
Main	NGBoost	1.0 [0.0, 2.3]; $c=9$, $n=1270$	6.9 [0.0, 19.2]; $c=10$, $n=1053$	33.3 [25.3, 41.3]; $c=10$, $n=2323$	OK
LNAS	Persistence anchor	1.9 [0.3, 3.5]; $c=16$, $n=627$	1.0 [0.1, 1.9]; $c=25$, $n=1101$	6.1 [3.9, 8.4]; $c=25$, $n=1728$	OK
LNAS	CQR	1.4 [0.1, 2.7]; $c=16$, $n=627$	0.0 [BD]; $c=25$, $n=1101$	39.6 [28.2, 51.0]; $c=25$, $n=1728$	OK
LNAS	NGBoost	69.2 [46.8, 91.6]; $c=16$, $n=627$	0.0 [BD]; $c=25$, $n=1101$	11.5 [1.1, 21.8]; $c=25$, $n=1728$	OK

threshold-specific validation.

All representative G5 cells in Table 7 report both error directions and exceed the denominator-5 suppression floor. The two zero-event LNAs false-rejection cells are marked bootstrap-degenerate because cell resampling cannot estimate unseen-event uncertainty from an all-zero boundary. The gate therefore passes its reporting requirement, while the application meaning remains bounded because the thresholds are illustrative, the effective cell counts are limited, and zero observed events do not establish zero operational risk.

The localized comparator is below the nominal point target in Main, LCAL, TCAL, and LOxf. In LCAL, the standard comparator has coverage 75.5%, and localization changes coverage by -8.3 pp without repairing that failure. In Main, the standard comparator is above target at 95.9% with lower bound 95.0%; localization changes coverage by -6.5 pp and lowers the bound to 83.7%, thereby converting a pass into a point-coverage and lower-bound shortfall. TNAS is the only task in which localization converts a standard point-coverage failure into a pass; LNAs and TOxf already meet the point target under the standard comparator. No lower-bound shortfall crosses the nominal boundary from failure to pass. Because the comparator uses distance-based residual localization rather than density-ratio weighting, these are empirical diagnostic outcomes without a covariate-shift coverage guarantee. Table 8 is therefore a sensitivity envelope, not evidence of conformal superiority.

5. Discussion

The audit changes the interpretation of cross-dataset conformal SOH benchmarks. Coverage is conditional on the benchmark’s measurement validity and information set; it is not automatically a reliability or serviceability result. Recent-label access can make a benchmark easier than the intended forecasting problem. The as-used schema-bundle contrast reveals an unstable evaluation design, but it jointly changes multiple columns, and the endpoint-wide independent-control

Table 8: Heuristic localized-residual CQR coverage by task. Cells/rows gives the effective battery-cell blocks and test records. Std (low) and Local (low) give point coverage with the 95% cell-block lower bound in parentheses; Delta is local minus standard coverage (pp). Pt $\geq$ nom marks nominal point coverage, not a formal coverage guarantee.

Task	Cells/rows	Std (low)	Local (low)	Delta	Pt $\geq$ nom
Main	10/2323	95.9% (95.0%)	89.4% (83.7%)	-6.5 pp	N
LCAL	12/11592	75.5% (69.1%)	67.2% (60.9%)	-8.3 pp	N
TCAL	12/5167	65.6% (52.9%)	68.0% (56.5%)	+2.4 pp	N
LNAS	25/1728	90.4% (86.0%)	91.2% (87.0%)	+0.8 pp	Y
TNAS	25/783	88.0% (83.6%)	93.7% (89.7%)	+5.7 pp	Y
LOxf	8/511	42.9% (35.0%)	42.9% (35.0%)	+0.0 pp	N
TOxf	8/233	98.7% (96.9%)	98.7% (96.9%)	+0.0 pp	Y

gate fails in LCAL and TCAL. The corrected LNAS false-acceptance association is therefore retained at the bundle level without attribution to bookkeeping fields or promotion to a causal schema mechanism. Residual drift, finite-cell variation, and label-definition differences remain plausible contributors.

The protocol’s position relative to the current state of the art is complementary rather than competitive. Existing conformal work in prognostics and battery state estimation — split-conformal RUL pipelines, robust online conformal prediction, conformalized quantile regression for electrified transportation — concentrates on producing better intervals [7, 17, 8, 18, 9]; the transfer and domain-generalization literature concentrates on making models survive shift [19, 20]. Neither line audits whether the benchmark that certifies those intervals measures the intended deployment question. The coverage collapses observed here are the empirical face of known theory — coverage degradation under non-exchangeability is bounded, not prevented [21, 22], and exchangeability violations are already documented in industrial time series [53] — but the theory does not tell an analyst which of these failure channels a specific benchmark contains. The protocol does: it separates information-set effects from schema-bundle sensitivity and residual drift with governed component gates. Adaptive and online conformal methods do not directly rescue this setting either, because a one-shot cross-dataset evaluation provides no sequential feedback for their updates [29, 30]. The one-task point-coverage recovery achieved by the localized-residual comparator is consistent with the localized-conformal literature, in which reweighted calibration improves conditional behavior only where local residual structure is informative and offers no general conditional guarantee [32, 33].

For reliability and battery-health practitioners, the engineering implication is a pre-submission benchmark-integrity discipline. Prognostic intervals are consumed by predictive-maintenance planning [10, 70], condition-based policies [11, 71], and multi-component scheduling [72, 73]; battery-health predictions are also used to optimize maintenance actions [12]. The observed +100.0 pp false-acceptance change at an illustrative serviceability threshold is therefore not merely a coverage statistic: if such a benchmark were used unaudited to set

a maintenance threshold, the resulting decision evidence would be mispriced. Quantifying that mispricing for a fleet requires application-specific threshold validation, which this study does not perform. Moreover, the opposite-direction -100.0 pp LCAL contrast shows that the bundle is not uniformly risk-increasing. Analysts should declare whether a recent measured SOH is available at prediction time, demonstrate task-appropriate split integrity, use cell-aware uncertainty, test schema claims against independent negative controls, and report threshold decisions with effective cell counts and record denominators. A localization comparator can test sensitivity, but it cannot substitute for a valid conformal guarantee. The audit protocol of Table 1 condenses this discipline into six governed gates; each has an evidentiary requirement and a failure consequence, so a failure bounds the claim rather than terminating the analysis. In this respect the protocol extends the reliability-engineering practice of assessing machine-learning evidence before use [1, 16, 65, 48] to conformal SOH benchmarks.

The recent-label finding is deliberately not stated as a monotone benefit. Method-matched deltas are strongly negative in TCAL, LNAS, TNAS, and LOxf, smaller but still negative in LCAL, near zero in Main, and positive in TOxf. That reversal matters: recent-SOH is not simply a universally helpful covariate; it changes the estimand and interacts with the target task. The practical failure is therefore undeclared information availability — a failure mode the label-scarce deployment literature makes concrete, since in-service capacity labels are exactly what adaptive battery prognostics cannot assume [46, 47], and feature-availability choices are already known to mislead battery-lifetime prediction [15]. A benchmark using an oracle recent label cannot support a no-recent-label deployment claim without a separate evaluation.

The localized-residual comparator sharpens the interpretation without turning the study into a method-success paper. It changes empirical coverage in several tasks and recovers exactly one standard point-coverage failure, but other tasks remain below target. Because it is not a density-ratio conformal method, its results show only that calibration is sensitive to local residual composition; they do not establish shift-robust coverage.

The main limitation is external breadth. The evidence base is limited to CALCE, NASA, and Oxford, so the demonstrated claim is not that every battery SOH benchmark has the same sensitivity. A Massachusetts Institute of Technology (MIT)-Stanford-Toyota fast-charge dataset [74] is excluded because its lithium-iron-phosphate chemistry and fast-charge-to-failure protocol would add chemistry and protocol confounding, and its records did not pass the same preprocessing and schema-compatibility checks. Broader modern and field datasets are needed for external validation.

Several design limitations follow directly from the audit framing. Calibration residuals are cycle-level observations from longitudinal cell histories; cell-block intervals quantify rate uncertainty but do not create independent exchangeable histories. A stronger follow-up should use cell-disjoint prospective splits, re-

port row-weighted and cell-macro coverage, and show worst-cell behavior near serviceability thresholds. The article treats recent-SOH as an oracle recent label; deployment-facing work should compare oracle, estimated, and unavailable recent-SOH on identical rows. The capacity-based label is harmonized only through the current preprocessing interface. G4’s independent control uses a single permutation draw ($B = 1$), so it cannot characterize a permutation null distribution. Because the control acts only as a veto, a non-null draw can withhold mechanism attribution but cannot create it; repeated permutation draws would quantify how often a null feature produces a control effect as large as the LCAL result. Likewise, the zero-event false-rejection cells in Table 7 are bootstrap-degenerate boundaries rather than evidence of zero underlying risk. Moreover, the original frozen processed CSV could not be recovered byte-for-byte; the repaired analyses were regenerated from the preserved raw holdings under Python 3.11.15 and scikit-learn 1.7.2. Although raw split membership was reproduced, this provenance discontinuity limits exact numerical replication of the earlier exploratory run and is one reason the present conclusions rely only on the corrected rerun.

The serviceability-threshold language is intentional. The audited SOH thresholds (0.65, 0.70, 0.75, 0.80, 0.85, 0.90) are illustrative capacity-SOH cutoffs used to demonstrate the diagnostic quantities. Their use in maintenance, warranty, or end-of-life decisions requires application-specific validation; this manuscript does not establish them as electrochemical safety boundaries or thermal-runaway risk thresholds. Additional field data, prospective forecasting splits, and application-specific risk models are needed before the audit can be treated as a general battery-management validation protocol.

6. Conclusion

This paper develops and demonstrates a governed benchmark-integrity audit protocol for conformance battery SOH evidence. In the corrected real-data analyses, method-matched recent-label removal produces statistically supported coverage reductions in five cross-dataset tasks, with task-dependent magnitudes, while Main and TOxf remain compatible with no effect. The protocol also detects that the as-used schema bundle changes coverage in two tasks and increases LNAS false acceptance at one corrected threshold. The LCAL decision contrast has the opposite sign and does not pass multiplicity correction. Because the bundle jointly changes multiple columns and the endpoint-wide independent control is non-null, the protocol reports these results at the bundle level only — demonstrating how a governed control prevents schema sensitivity from being over-interpreted as a mechanism.

The five contributions remain aligned with that evidence. First, the paper defines an explicit six-gate benchmark-integrity protocol. Second, it quantifies task-dependent recent-label sensitivity with method-matched contrasts. Third, it combines multiplicity-adjusted schema contrasts with an independent negative control. Fourth, it reports a corrected LNAS link between schema-bundle

sensitivity and threshold false acceptance. Fifth, it bounds the final diagnostic as a localized-residual sensitivity envelope without a covariate-shift guarantee.

Every gate specifies a condition, an evidentiary requirement, and a bound on the admissible claim when the requirement is not met. The gates are formulated independently of the three datasets, but their detection performance and portability have not been validated; this case demonstrates executability and claim bounding only. Because the six-gate synthesis was abstracted from the diagnostic program it audits, it is not an independent test of detection power. Applying the protocol prospectively to benchmarks that the authors did not construct is the necessary next validation step.

Within the three public laboratory datasets studied here, the implication for reliability engineering is direct: coverage should support a serviceability interpretation only after the benchmark’s information set, split integrity, uncertainty units, controls, and decision consequences have been audited. Broader field data, prospective forecasting splits, and repeated-control designs remain necessary before generalizing beyond this case.

Data Availability

This study uses real cycle-level SOH records from three public battery datasets: the CALCE Battery Research Group battery data repository [66], the NASA Ames Prognostics Data Repository [67], and the Oxford Battery Degradation Dataset [68], all accessed 2026-06-02. The versioned derived-data package, source-data provenance, split manifests, run manifests, archived analysis plans, and regeneration code underlying every reported value are publicly available at the immutable replication commit <https://github.com/QuantDiviner/NEX-CP-conformal-soh-audit/tree/42f1120ed1f5cbc0282a706ebd4bec24a8d19d6e>. Supplementary Tables S1–S2 provide the case-implementation and provenance matrix.

Code Availability

The complete analysis code, locked dependencies, and run manifests are available at the immutable replication commit above. The repository regenerates the scripted results table from which all manuscript values are drawn.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Funding

This work was supported by the National Social Science Foundation of China (grant no. 25BTJ045) and the Natural Science Foundation of Jiangxi Province (grant no. 20232BAB201025), both awarded to Q.L. The funders had no role in study design, data collection and analysis, decision to publish, or preparation of the manuscript.

Declaration of Generative AI and AI-Assisted Technologies in the Manuscript Preparation Process

During the preparation of this work, the authors used OpenAI Codex for code editing assistance, manuscript formatting, and language polishing. The authors subsequently reviewed and edited the content, verified all reported evidence and results, and take full responsibility for the content of the publication.

CRedit Authorship Contribution Statement

Qingsong Shan: Software, Data curation, Formal analysis, Validation, Writing - Review & Editing. **Qianning Liu:** Conceptualization, Methodology, Investigation, Visualization, Writing - Original Draft, Writing - Review & Editing, Supervision, Funding acquisition.

Corresponding Author

Qianning Liu
School of Statistics and Data Science
Key Laboratory of Data Science in Finance and Economics
Jiangxi University of Finance and Economics
Nanchang, China
Email: liuqianning@jxufe.edu.cn

References

- [1] E. Zio, Prognostics and health management (phm): Where are we and where do we (need to) go in theory and practice, *Reliability Engineering & System Safety* 218 (2022) 108119. [doi:10.1016/j.ress.2021.108119](https://doi.org/10.1016/j.ress.2021.108119).
- [2] Y.-H. Lin, P.-C. Yan, E. Zio, Recent advances in uncertainty analysis for prognostics and remaining useful life prediction: A review, *Reliability Engineering & System Safety* 269 (2026) 112110. [doi:10.1016/j.ress.2025.112110](https://doi.org/10.1016/j.ress.2025.112110).
- [3] S. Wang, Y. Fan, S. Jin, P. Takyi-Aninakwa, C. Fernandez, Improved anti-noise adaptive long short-term memory neural network modeling for the robust remaining useful life prediction of lithium-ion batteries, *Reliability Engineering & System Safety* 230 (2023) 108920. [doi:10.1016/j.ress.2022.108920](https://doi.org/10.1016/j.ress.2022.108920).

- [4] H. Meng, M. Geng, T. Han, Long short-term memory network with bayesian optimization for health prognostics of lithium-ion batteries based on partial incremental capacity analysis, *Reliability Engineering & System Safety* 236 (2023) 109288. doi:[10.1016/j.ress.2023.109288](https://doi.org/10.1016/j.ress.2023.109288).
- [5] L. Basora, A. Viens, M. A. Chao, X. Olive, A benchmark on uncertainty quantification for deep learning prognostics, *Reliability Engineering & System Safety* 253 (2025) 110513. doi:[10.1016/j.ress.2024.110513](https://doi.org/10.1016/j.ress.2024.110513).
- [6] V. Nemani, L. Biggio, X. Huan, Z. Hu, O. Fink, A. Tran, Y. Wang, X. Zhang, C. Hu, Uncertainty quantification in machine learning for engineering design and health prognostics: A tutorial, *Mechanical Systems and Signal Processing* 205 (2023) 110796. doi:[10.1016/j.ymssp.2023.110796](https://doi.org/10.1016/j.ymssp.2023.110796).
- [7] W. Xu, S. Gao, Z. Wang, E. Zio, A novel uncertainty-aware framework for remaining useful life prediction integrating uncertainty quantification and calibration, *Reliability Engineering & System Safety* 275 (2026) 112763. doi:[10.1016/j.ress.2026.112763](https://doi.org/10.1016/j.ress.2026.112763).
- [8] A. Javanmardi, E. Hüllermeier, Conformal prediction intervals for remaining useful lifetime estimation, *International Journal of Prognostics and Health Management* 14 (2) (2023). doi:[10.36001/ijphm.2023.v14i2.3417](https://doi.org/10.36001/ijphm.2023.v14i2.3417).
- [9] K. L. Soon, L. T. Soon, Enhancing reliability in electrified transportation: A conformalized quantile regression framework for battery state-of-charge uncertainty quantification, *Journal of Power Sources* 666 (2026) 239123. doi:[10.1016/j.jpowsour.2025.239123](https://doi.org/10.1016/j.jpowsour.2025.239123).
- [10] M. Mitici, I. de Pater, A. Barros, Z. Zeng, Dynamic predictive maintenance for multiple components using data-driven probabilistic rul prognostics: The case of turbofan engines, *Reliability Engineering & System Safety* 234 (2023) 109199. doi:[10.1016/j.ress.2023.109199](https://doi.org/10.1016/j.ress.2023.109199).
- [11] L. Zhuang, A. Xu, X.-L. Wang, A prognostic driven predictive maintenance framework based on bayesian deep learning, *Reliability Engineering & System Safety* 234 (2023) 109181. doi:[10.1016/j.ress.2023.109181](https://doi.org/10.1016/j.ress.2023.109181).
- [12] Z. Wang, W. Shangguan, C. Peng, Z. Xu, J. Fan, E. Zio, Multi-action predictive maintenance for lithium-ion batteries based on stacked bilinear neural network, *Reliability Engineering & System Safety* 272 (2026) 112491. doi:[10.1016/j.ress.2026.112491](https://doi.org/10.1016/j.ress.2026.112491).
- [13] I. Nejjar, F. Geissmann, M. Zhao, C. Taal, O. Fink, Domain adaptation via alignment of operation profile for remaining useful lifetime prediction, *Reliability Engineering & System Safety* 242 (2024) 109718. doi:[10.1016/j.ress.2023.109718](https://doi.org/10.1016/j.ress.2023.109718).

- [14] V. M. Nagulapati, H. Lee, D. Jung, B. Brigljevic, Y. Choi, H. Lim, Capacity estimation of batteries: Influence of training dataset size and diversity on data driven prognostic models, *Reliability Engineering & System Safety* 216 (2021) 108048. doi:[10.1016/j.ress.2021.108048](https://doi.org/10.1016/j.ress.2021.108048).
- [15] A. Geslin, B. van Vlijmen, X. Cui, A. Bhargava, P. A. Asinger, R. D. Braatz, W. C. Chueh, Selecting the appropriate features in battery lifetime predictions, *Joule* 7 (9) (2023) 1956–1965. doi:[10.1016/j.joule.2023.07.021](https://doi.org/10.1016/j.joule.2023.07.021).
- [16] E. Chen, H. Bao, N. Dinh, Evaluating the reliability of machine-learning-based predictions used in nuclear power plant instrumentation and control systems, *Reliability Engineering & System Safety* 250 (2024) 110266. doi:[10.1016/j.ress.2024.110266](https://doi.org/10.1016/j.ress.2024.110266).
- [17] W. Wang, Z. Wang, Z. Cai, C. Hu, S. Si, Robust uncertainty quantification for online remaining useful life prediction with randomly missing and partially faulty sensor data, *Reliability Engineering & System Safety* 262 (2025) 111177. doi:[10.1016/j.ress.2025.111177](https://doi.org/10.1016/j.ress.2025.111177).
- [18] S. Piao, R. Huang, F. Tsung, Crulp: Reliable rul estimation inspired by conformal prediction, *IEEE Transactions on Instrumentation and Measurement* 74 (2025) 1–11. doi:[10.1109/tim.2024.3522678](https://doi.org/10.1109/tim.2024.3522678).
- [19] I. Nejjar, G. Frusque, F. Forest, O. Fink, Uncertainty-guided alignment for unsupervised domain adaptation in regression, *Reliability Engineering & System Safety* 270 (2026) 112143. doi:[10.1016/j.ress.2025.112143](https://doi.org/10.1016/j.ress.2025.112143).
- [20] X. Fei, A. Zhenyi, L. Kun, Z. Chuanlin, A novel decoupled smoothing domain generalization network for probabilistic interval prediction of lithium-ion battery state of health, *Journal of Energy Storage* 156 (2026) 121643. doi:[10.1016/j.est.2026.121643](https://doi.org/10.1016/j.est.2026.121643).
- [21] R. F. Barber, E. J. Candès, A. Ramdas, R. J. Tibshirani, [Conformal prediction beyond exchangeability](#), *The Annals of Statistics* 51 (2) (2023) 816–845. doi:[10.1214/23-AOS2276](https://doi.org/10.1214/23-AOS2276).
URL <https://doi.org/10.1214/23-AOS2276>
- [22] R. I. Oliveira, P. Orenstein, T. Ramos, J. V. Romano, [Split conformal prediction and non-exchangeable data](#), *Journal of Machine Learning Research* 25 (225) (2024) 1–38.
URL <https://jmlr.org/papers/v25/23-1553.html>
- [23] V. Vovk, A. Gammerman, G. Shafer, [Algorithmic Learning in a Random World](#), Springer, 2005. doi:[10.1007/b106715](https://doi.org/10.1007/b106715).
URL <https://link.springer.com/book/10.1007/b106715>
- [24] J. Lei, M. G’Sell, A. Rinaldo, R. J. Tibshirani, L. Wasserman, [Distribution-free predictive inference for regression](#), *Journal of the American Statistical*

- Association 113 (523) (2018) 1094–1111. doi:[10.1080/01621459.2017.1307116](https://doi.org/10.1080/01621459.2017.1307116).
URL <https://doi.org/10.1080/01621459.2017.1307116>
- [25] A. N. Angelopoulos, S. Bates, Conformal prediction: A gentle introduction, *Foundations and Trends® in Machine Learning* 16 (4) (2023) 494–591. doi:[10.1561/22000000101](https://doi.org/10.1561/22000000101).
 - [26] Y. Romano, E. Patterson, E. J. Candès, [Conformalized quantile regression](#), *Advances in Neural Information Processing Systems* 32 (2019). arXiv:[1905.03222](https://arxiv.org/abs/1905.03222).
URL https://proceedings.neurips.cc/paper_files/paper/2019/hash/5103c3584b063c431bd1268e9b5e76fb-Abstract.html
 - [27] R. J. Tibshirani, R. F. Barber, E. J. Candès, A. Ramdas, [Conformal prediction under covariate shift](#), *Advances in Neural Information Processing Systems* 32 (2019). arXiv:[1904.06019](https://arxiv.org/abs/1904.06019).
URL https://proceedings.neurips.cc/paper_files/paper/2019/hash/8fb21ee7a2207526da55a679f0332de2-Abstract.html
 - [28] C. Xu, Y. Xie, Conformal prediction for time series, *IEEE Transactions on Pattern Analysis and Machine Intelligence* 45 (10) (2023) 11575–11587. doi:[10.1109/tpami.2023.3272339](https://doi.org/10.1109/tpami.2023.3272339).
 - [29] I. Gibbs, E. J. Candès, [Adaptive conformal inference under distribution shift](#), *Advances in Neural Information Processing Systems* 34 (2021). arXiv:[2106.00170](https://arxiv.org/abs/2106.00170).
URL <https://proceedings.neurips.cc/paper/2021/hash/0d441de75945e5acbc865406fc9a2559-Abstract.html>
 - [30] I. Gibbs, E. J. Candès, [Conformal inference for online prediction with arbitrary distribution shifts](#), *Journal of Machine Learning Research* 25 (162) (2024) 1–36.
URL <https://jmlr.org/papers/v25/22-1218.html>
 - [31] I. Gibbs, J. J. Cherian, E. J. Candès, Conformal prediction with conditional guarantees, *Journal of the Royal Statistical Society Series B: Statistical Methodology* 87 (4) (2025) 1100–1126. doi:[10.1093/jrsssb/qkaf008](https://doi.org/10.1093/jrsssb/qkaf008).
 - [32] L. Guan, Localized conformal prediction: a generalized inference framework for conformal prediction, *Biometrika* 110 (1) (2023) 33–50. doi:[10.1093/biomet/asac040](https://doi.org/10.1093/biomet/asac040).
 - [33] R. Hore, R. F. Barber, Conformal prediction with local weights: randomization enables robust guarantees, *Journal of the Royal Statistical Society Series B: Statistical Methodology* 87 (2) (2025) 549–578. doi:[10.1093/jrsssb/qkae103](https://doi.org/10.1093/jrsssb/qkae103).

- [34] A. N. Angelopoulos, S. Bates, A. Fisch, L. Lei, T. Schuster, [Conformal risk control](#), in: International Conference on Learning Representations, 2024.
URL <https://openreview.net/forum?id=33XGfHLtZg>
- [35] A. Farinhas, C. Zerva, D. Ulmer, A. F. T. Martins, [Non-exchangeable conformal risk control](#), in: International Conference on Learning Representations, 2024.
URL <https://openreview.net/forum?id=j511LaqEeP>
- [36] A. Saxena, J. Celaya, B. Saha, S. Saha, K. Goebel, [Evaluating prognostics performance for algorithms incorporating uncertainty estimates](#), in: 2010 IEEE Aerospace Conference, 2010, pp. 1–11. doi:10.1109/AERO.2010.5446828.
URL <https://ieeexplore.ieee.org/document/5446828/>
- [37] W. He, N. Williard, M. Osterman, M. Pecht, [Remaining useful performance analysis of batteries](#), in: IEEE Conference on Prognostics and Health Management, 2011, pp. 1–6. doi:10.1109/ICPHM.2011.6024341.
URL <https://doi.org/10.1109/ICPHM.2011.6024341>
- [38] K. Liu, Y. Shang, Q. Ouyang, W. D. Widanage, [A data-driven approach with uncertainty quantification for predicting future capacities and remaining useful life of lithium-ion battery](#), IEEE Transactions on Industrial Electronics 68 (4) (2021) 3170–3180. doi:10.1109/TIE.2020.2973876.
URL <https://ieeexplore.ieee.org/abstract/document/9040661/>
- [39] M. Bercibar, I. Gandiaga, I. Villarreal, N. Omar, J. Van Mierlo, P. Van den Bossche, [Critical review of state of health estimation methods of Li-Ion batteries for real applications](#), Renewable and Sustainable Energy Reviews 56 (2016) 572–587. doi:10.1016/j.rser.2015.11.042.
URL <https://doi.org/10.1016/j.rser.2015.11.042>
- [40] Y. Wei, D. Wu, Prediction of state of health and remaining useful life of lithium-ion battery using graph convolutional network with dual attention mechanisms, Reliability Engineering & System Safety 230 (2023) 108947. doi:10.1016/j.ress.2022.108947.
- [41] Y. Zhang, M. Zhang, C. Liu, Z. Feng, Y. Xu, Reliability enhancement of state of health assessment model of lithium-ion battery considering the uncertainty with quantile distribution of deep features, Reliability Engineering & System Safety 245 (2024) 110002. doi:10.1016/j.ress.2024.110002.
- [42] R. Zhu, J. Hu, W. Peng, Bayesian calibrated physics-informed neural networks for second-life battery soh estimation, Reliability Engineering & System Safety 264 (2025) 111432. doi:10.1016/j.ress.2025.111432.
- [43] Y. Che, Y. Zheng, F. E. Forest, X. Sui, X. Hu, R. Teodorescu, Predictive health assessment for lithium-ion batteries with probabilistic degradation

- prediction and accelerating aging detection, *Reliability Engineering & System Safety* 241 (2024) 109603. doi:[10.1016/j.ress.2023.109603](https://doi.org/10.1016/j.ress.2023.109603).
- [44] M. Lin, Y. You, W. Wang, J. Wu, Battery health prognosis with gated recurrent unit neural networks and hidden markov model considering uncertainty quantification, *Reliability Engineering & System Safety* 230 (2023) 108978. doi:[10.1016/j.ress.2022.108978](https://doi.org/10.1016/j.ress.2022.108978).
 - [45] Z. Wang, Y. Ma, J. Gao, H. Chen, Remaining useful life prediction for solid-state lithium batteries based on spatial-temporal relations and neuronal ode-assisted kan, *Reliability Engineering & System Safety* 260 (2025) 111003. doi:[10.1016/j.ress.2025.111003](https://doi.org/10.1016/j.ress.2025.111003).
 - [46] J. Zhang, Y. Jiang, X. Li, M. Huo, H. Luo, S. Yin, An adaptive remaining useful life prediction approach for single battery with unlabeled small sample data and parameter uncertainty, *Reliability Engineering & System Safety* 222 (2022) 108357. doi:[10.1016/j.ress.2022.108357](https://doi.org/10.1016/j.ress.2022.108357).
 - [47] J. Pan, B. Sun, Z. Wu, Z. Yi, Q. Feng, Y. Ren, Z. Wang, Probabilistic remaining useful life prediction without lifetime labels: A bayesian deep learning and stochastic process fusion method, *Reliability Engineering & System Safety* 250 (2024) 110313. doi:[10.1016/j.ress.2024.110313](https://doi.org/10.1016/j.ress.2024.110313).
 - [48] M. Salinas-Camus, K. Goebel, N. Eleftheroglou, A comprehensive review and evaluation framework for data-driven prognostics: Uncertainty, robustness, interpretability, and feasibility, *Mechanical Systems and Signal Processing* 237 (2025) 113015. doi:[10.1016/j.ymssp.2025.113015](https://doi.org/10.1016/j.ymssp.2025.113015).
 - [49] M. Liu, Y. Yang, J. Cheng, J. Cui, X. Zheng, Credible long-term degradation prediction for proton exchange membrane fuel cell: A physics-informed neural network with conformal prediction approach, *Reliability Engineering & System Safety* 276 (2026) 112945. doi:[10.1016/j.ress.2026.112945](https://doi.org/10.1016/j.ress.2026.112945).
 - [50] H. Wu, Y. Xu, Sequential surrogate modeling for inverse design with conformal inference-based uncertainty quantification, *Reliability Engineering & System Safety* 266 (2026) 111782. doi:[10.1016/j.ress.2025.111782](https://doi.org/10.1016/j.ress.2025.111782).
 - [51] S. Yuan, J. Li, C. Wang, X. Zhang, Conformal machine learning for reliable anomaly detection in industrial cyber-physical systems, *Reliability Engineering & System Safety* 274 (2026) 112417. doi:[10.1016/j.ress.2026.112417](https://doi.org/10.1016/j.ress.2026.112417).
 - [52] Y. Xu, J. Chen, X. Zheng, W. Zhou, W. Yao, A width-optimized ensemble uncertainty calibration approach for interval reliability analysis, *Reliability Engineering & System Safety* 272 (2026) 112669. doi:[10.1016/j.ress.2026.112669](https://doi.org/10.1016/j.ress.2026.112669).
 - [53] R. Zhang, P. Zhou, Uncertainty quantification based on conformal prediction for industrial time series with distribution shift, *IEEE Transactions on*

- Industrial Informatics 21 (5) (2025) 3676–3685. doi:10.1109/tii.2025.3529920.
- [54] Z. Ye, J. Yu, State-of-health estimation for lithium-ion batteries using domain adversarial transfer learning, IEEE Transactions on Power Electronics 37 (3) (2022) 3528–3543. doi:10.1109/TPEL.2021.3117788.
URL <https://ieeexplore.ieee.org/abstract/document/9560040>
 - [55] S. B. Vilsen, D. I. Stroe, Transfer learning for adapting battery state-of-health estimation from laboratory to field operation, IEEE Access 10 (2022) 26514–26528. doi:10.1109/ACCESS.2022.3156657.
URL <https://ieeexplore.ieee.org/abstract/document/9727154/>
 - [56] L. Shen, J. Li, L. Meng, L. Zhu, H. T. Shen, Transfer learning-based state of charge and state of health estimation for li-ion batteries: A review, IEEE Transactions on Transportation Electrification 10 (1) (2024) 1465–1481. doi:10.1109/TTE.2023.3293551.
URL <https://ieeexplore.ieee.org/abstract/document/10177255/>
 - [57] B. Wang, P. Baraldi, A. Shokry, E. Zio, A novel two-stage heterogeneous transfer learning framework for the estimation of the remaining useful life of industrial components, Reliability Engineering & System Safety 267 (2026) 111968. doi:10.1016/j.ress.2025.111968.
 - [58] Z. Zhang, X. Chen, E. Zio, L. Li, Multi-task learning boosted predictions of the remaining useful life of aero-engines under scenarios of working-condition shift, Reliability Engineering & System Safety 237 (2023) 109350. doi:10.1016/j.ress.2023.109350.
 - [59] Y. Wang, Z. Zhang, D. Gong, G. Xue, Mitigating domain shift problems in data-driven risk assessment models, Reliability Engineering & System Safety 263 (2025) 111263. doi:10.1016/j.ress.2025.111263.
 - [60] T. Gebru, J. Morgenstern, B. Vecchione, J. W. Vaughan, H. Wallach, H. Daume III, K. Crawford, Datasheets for datasets, Communications of the ACM 64 (12) (2021) 86–92. doi:10.1145/3458723.
URL <https://doi.org/10.1145/3458723>
 - [61] R. Geirhos, J.-H. Jacobsen, C. Michaelis, R. Zemel, W. Brendel, M. Bethge, F. A. Wichmann, Shortcut learning in deep neural networks, Nature Machine Intelligence 2 (2020) 665–673. doi:10.1038/s42256-020-00257-z.
URL <https://doi.org/10.1038/s42256-020-00257-z>
 - [62] S. Kapoor, A. Narayanan, Leakage and the reproducibility crisis in machine-learning-based science, Patterns 4 (9) (2023) 100804. doi:10.1016/j.patter.2023.100804.
URL <https://doi.org/10.1016/j.patter.2023.100804>

- [63] F. Wang, Z. Zhao, Z. Zhai, Z. Shang, R. Yan, X. Chen, Explainability-driven model improvement for soh estimation of lithium-ion battery, *Reliability Engineering & System Safety* 232 (2023) 109046. doi:10.1016/j.ress.2022.109046.
- [64] F. Wang, Z. Zhai, B. Liu, S. Zheng, Z. Zhao, X. Chen, Open access dataset, code library and benchmarking deep learning approaches for state-of-health estimation of lithium-ion batteries, *Journal of Energy Storage* 77 (2024) 109884. doi:10.1016/j.est.2023.109884.
- [65] B. Panić, M. Pašić, M. Nagode, S. Oman, On simple baselines for domain shift in condition monitoring: A case study in bearing fault identification, *Reliability Engineering & System Safety* 277 (2027) 113041. doi:10.1016/j.ress.2026.113041.
- [66] CALCE Battery Research Group, University of Maryland, [Battery data](#), CALCE Battery Research Group battery data repository, [dataset], accessed 2026-06-02 (2026). URL <https://web.calce.umd.edu/batteries/data/>
- [67] NASA Ames Prognostics Center of Excellence, [Battery data set](#), NASA Ames Prognostics Data Repository, [dataset], accessed 2026-06-02 (2026). URL <https://www.nasa.gov/intelligent-systems-division/discovery-and-systems-health/pcoe/pcoe-data-set-repository/>
- [68] D. Howey, C. Birkel, [Oxford battery degradation dataset 1](#), University of Oxford Research Archive dataset, [dataset], accessed 2026-06-02 (2017). doi:10.5287/bodleian:ko2kdmygg. URL <https://ora.ox.ac.uk/objects/uuid:03ba4b01-cfed-46d3-9b1a-7d4a7bdf6fac>
- [69] T. Duan, A. Avati, D. Y. Ding, K. K. Thai, S. Basu, A. Y. Ng, A. Schuler, [NGBoost: Natural gradient boosting for probabilistic prediction](#), in: *Proceedings of the 37th International Conference on Machine Learning*, Vol. 119 of *Proceedings of Machine Learning Research*, PMLR, 2020, pp. 2690–2700. arXiv:1910.03225. URL <https://proceedings.mlr.press/v119/duan20a.html>
- [70] T. I. Pedersen, J. Vatn, Optimizing a condition-based maintenance policy by taking the preferences of a risk-averse decision maker into account, *Reliability Engineering & System Safety* 228 (2022) 108775. doi:10.1016/j.ress.2022.108775.
- [71] I. de Pater, M. Mitici, Predictive maintenance for multi-component systems of repairables with remaining-useful-life prognostics and a limited stock of spare components, *Reliability Engineering & System Safety* 214 (2021) 107761. doi:10.1016/j.ress.2021.107761.

- [72] L. Wang, Y. Chen, Z. Zhu, X. Zhao, Dynamic predictive maintenance framework for mechanical systems via uncertainty-aware rul estimation, *Mechanical Systems and Signal Processing* 247 (2026) 113977. doi:[10.1016/j.ymssp.2026.113977](https://doi.org/10.1016/j.ymssp.2026.113977).
- [73] Z. Wang, W. Shangguan, Z. Xu, C. Peng, E. Zio, B. Cai, A multi-objective optimization model for predictive opportunistic maintenance of lithium-ion batteries, *Journal of Energy Storage* 132 (2025) 117902. doi:[10.1016/j.est.2025.117902](https://doi.org/10.1016/j.est.2025.117902).
- [74] K. A. Severson, P. M. Attia, N. Jin, N. Perkins, B. Jiang, Z. Yang, M. H. Chen, M. Aykol, P. K. Herring, D. Fraggedakis, M. Z. Bazant, S. J. Harris, W. C. Chueh, R. D. Braatz, [Data-driven prediction of battery cycle life before capacity degradation](#), *Nature Energy* 4 (5) (2019) 383–391. doi:[10.1038/s41560-019-0356-8](https://doi.org/10.1038/s41560-019-0356-8).
URL <https://doi.org/10.1038/s41560-019-0356-8>