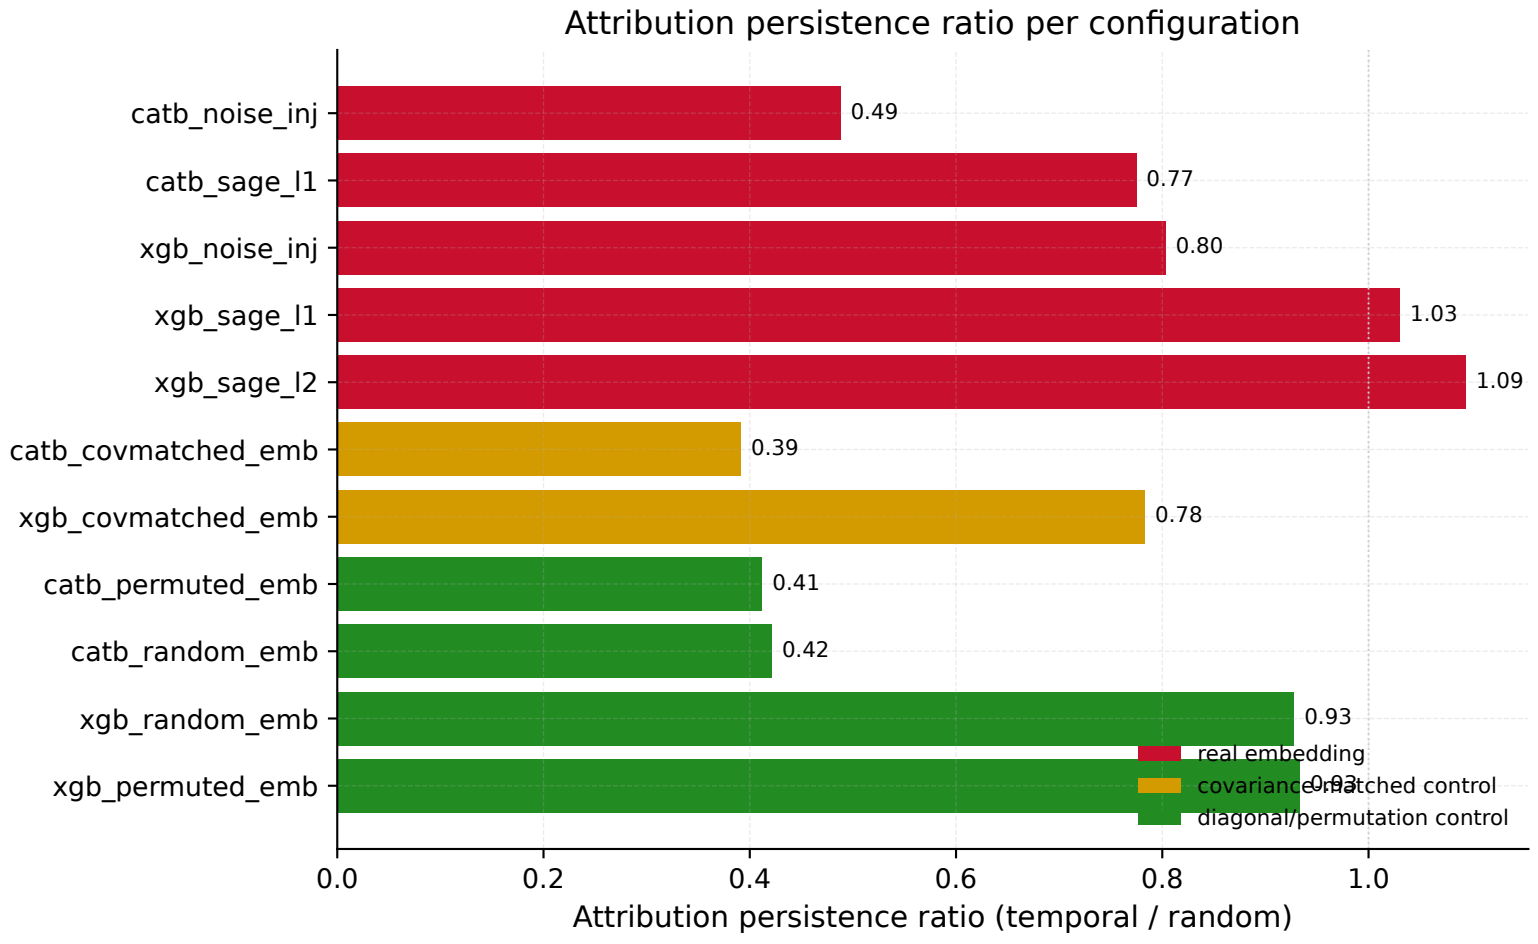
Attribution persistence ratio per configuration
catb_noise_inj
catb_sage_l1
xgb_noise_inj
xgb_sage_l1
xgb_sage_l2
catb_covmatched_emb
xgb_covmatched_emb
catb_permuted_emb
catb_random_emb
xgb_random_emb
xgb_permuted_emb
0.49
0.77
0.80
1.03
1.09
0.39
0.78
0.41
0.42
0.93
0.93
real embedding
covariance-matched control
diagonal/permutation control
0.0
0.2
0.4
0.6
0.8
1.0
Attribution persistence ratio (temporal / random)