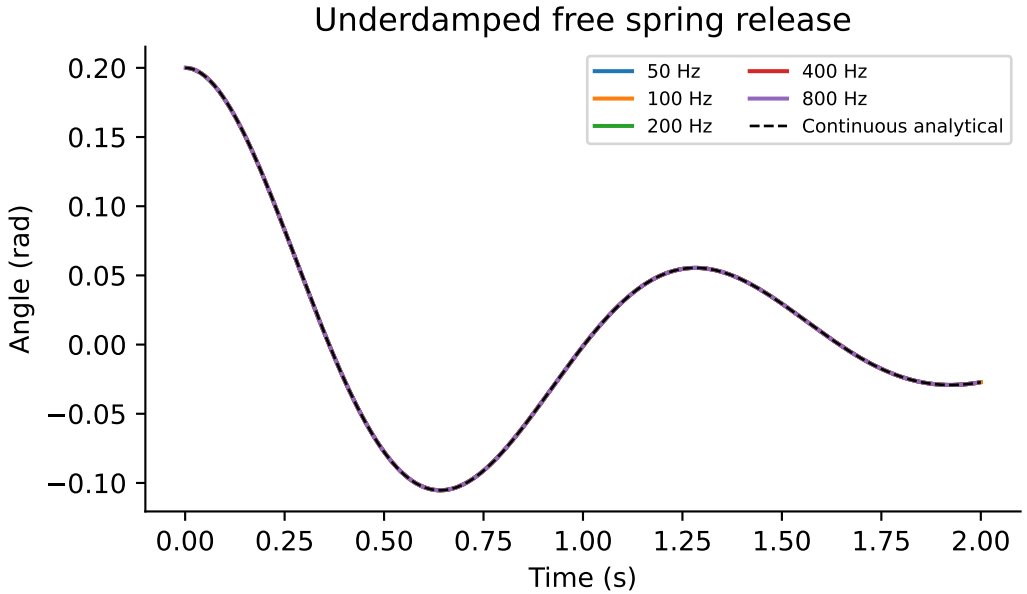
Underdamped free spring release
50 Hz
100 Hz
200 Hz
400 Hz
800 Hz
Continuous analytical
Angle (rad)
Time (s)

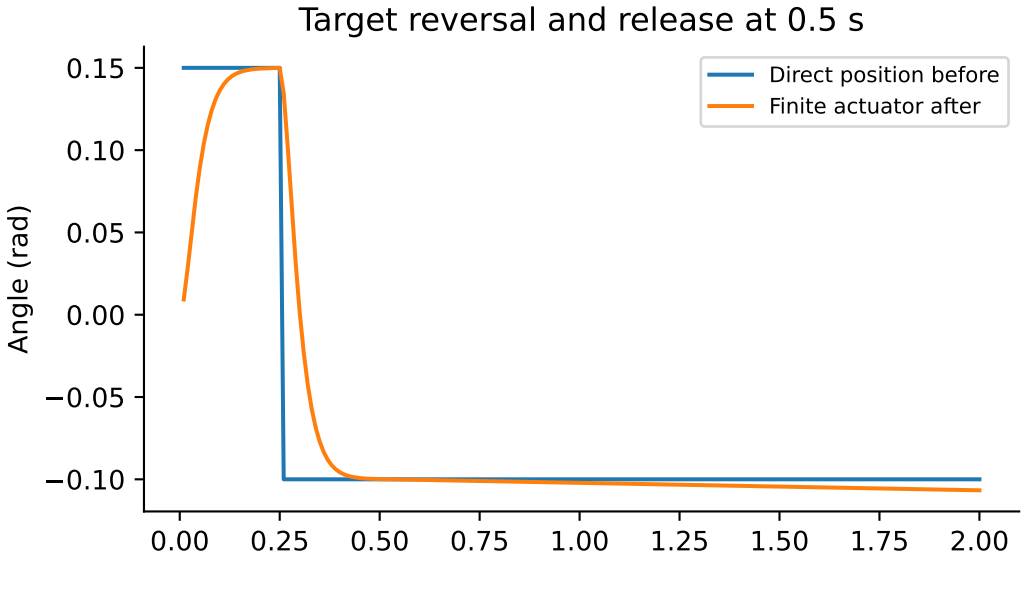
Target reversal and release at 0.5 s
Direct position before
Finite actuator after
Angle (rad)

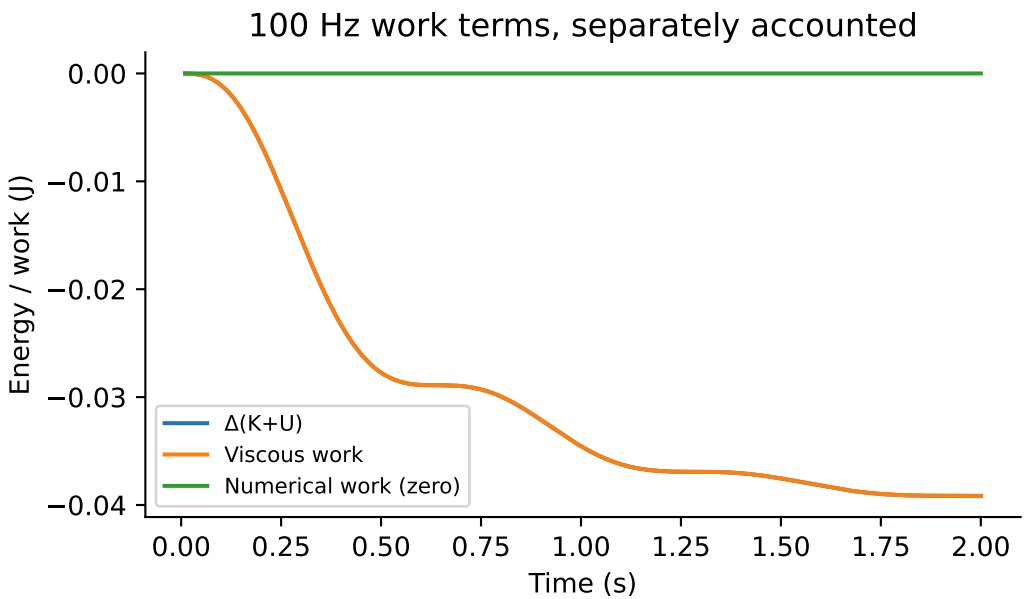
100 Hz work terms, separately accounted
Δ(K+U)
Viscous work
Numerical work (zero)
Energy / work (J)
Time (s)

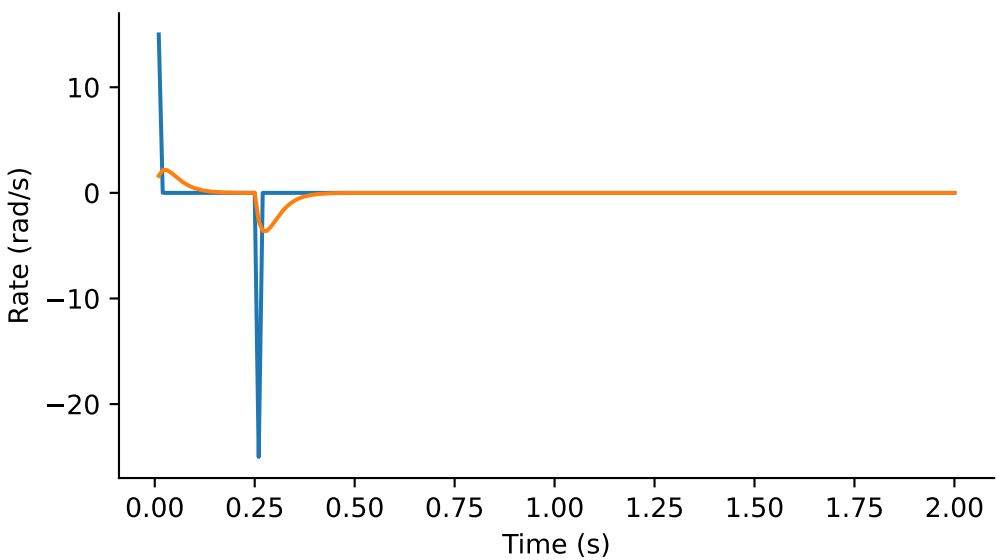
Rate (rad/s)
Time (s)