①-③ UE-314

⑤-④ UE-313

UNIRISE 10A 250V~ E206144

UE-314

UNIRISE

28.6±0.3
15.7±0.3
20.6±0.3
16±0.5 / 0
L   N
14±0.2
24±0 / +0.5
4±0.2

19.5±0.5
63.5±2.0
80±5

4±2   4±2

62.3±2.0
80±5

N   E   L
15.8±0 / -0.5
14±0.2
23±0 / -0.5

E206144 10A 250V~   UE-313

13 min
16 min
18 min

1. PVC jacket
2. PVC insulation
3. conductor

6.35±0.2

41*0.16±0.005MM   OD:6.35±0.2MM
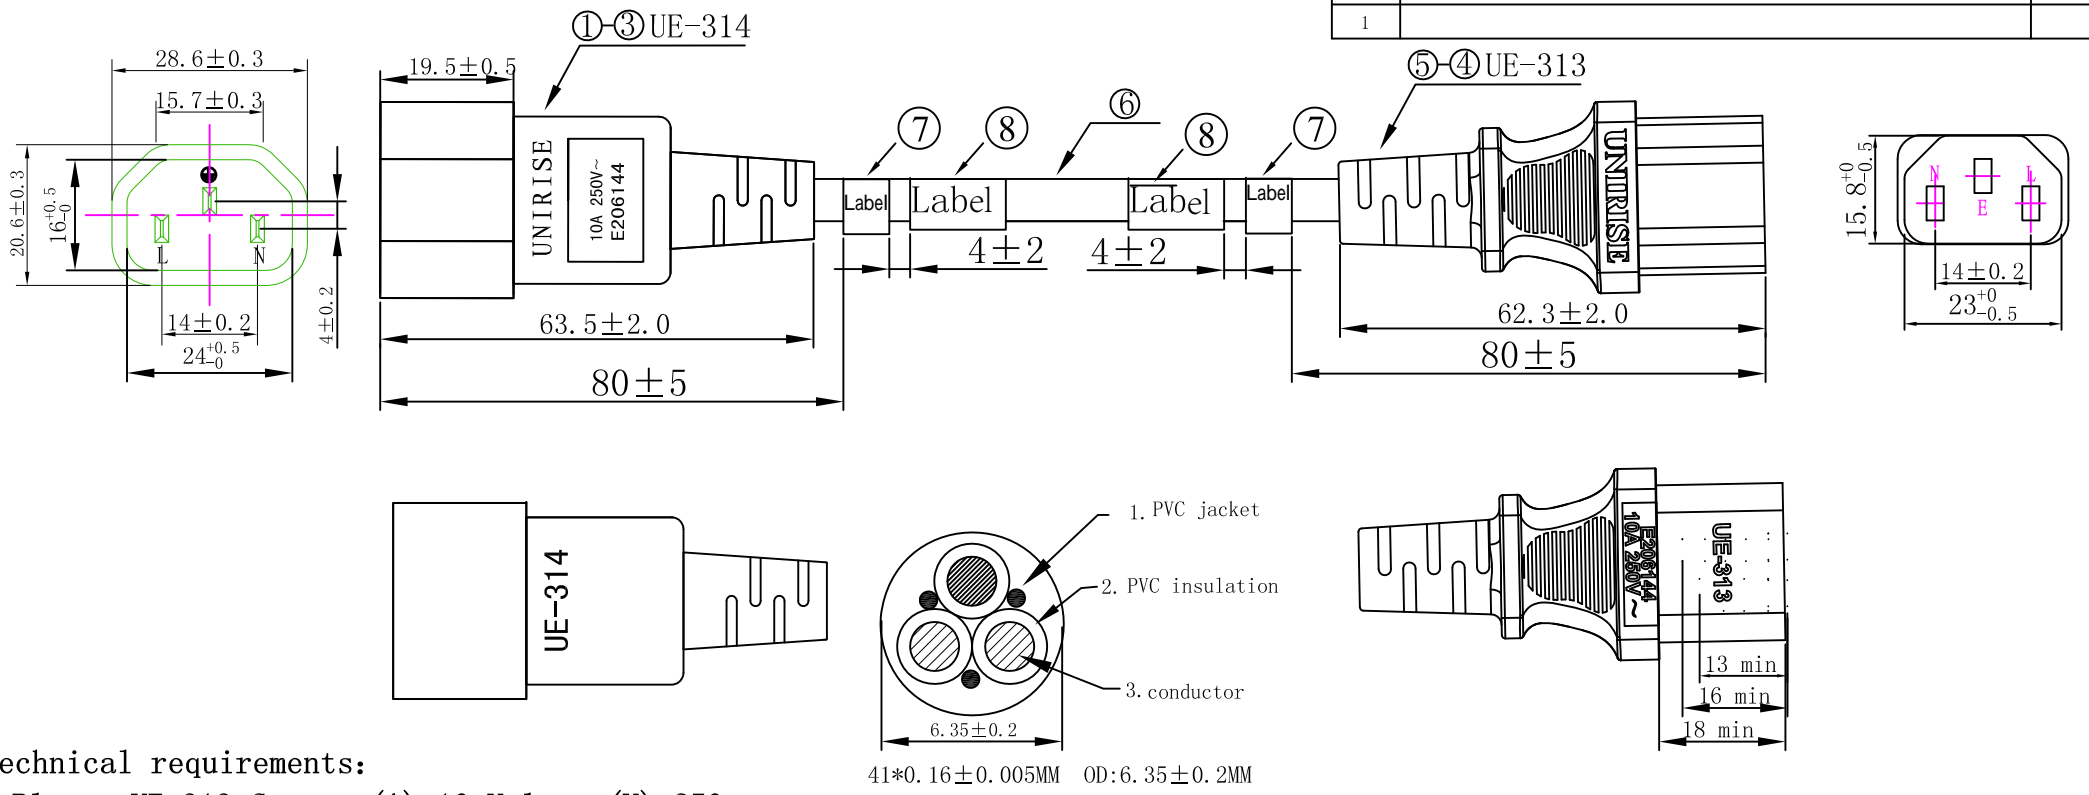
Technical requirements:
1. Plug: a: UE-313, Current(A): 10, Voltage(V): 250
       b: UE-314, Current(A): 10, Voltage(V): 250
2. Cord: Soft SVT #18/3C 105℃ unirise press word Blue(BU-04)
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

CORD MARKING：E176096 (UL) SVT VW-1 105℃ 300V 3×0.824mm2 (18AWG)
Or C(UL) SVT FT1 105℃ 300V 3×0.824mm2 (18AWG) UNIRISE

BOM

Items	Part Number	Description	Q'TY	Colour
8	39005066	Blank serial label	2PCS	----
7	39005027	47x13mm PET Paster Length label	2PCS	-----
6	CK91118322	SVT 18/3C 105℃	1PCS	
5	306560000	PVC of plug 83A	1PCS	
4	316313903	UE-313 Inside Shelf	1PCS	White
3	30656000	PVC of plug 77A	/	
2	315314900	Blade of UE-314	3PCS	----
1	316314000	UE-314 Inside Shelf	1PCS	Black

CUSTOMER CONFIRM

Drawing No.: PWRC13C14XXFYYY
Power Supply Cord: UE-313+UE-314
Customer:
Colour: Black
Sample Part NO: W009-007A-2017

UNC

Page: Version: A
Approved by: Jason
Checked by: songyu
Drawn by: chengxiewei
Unit: mm
Sheet:
DATE: 2017-03-01