
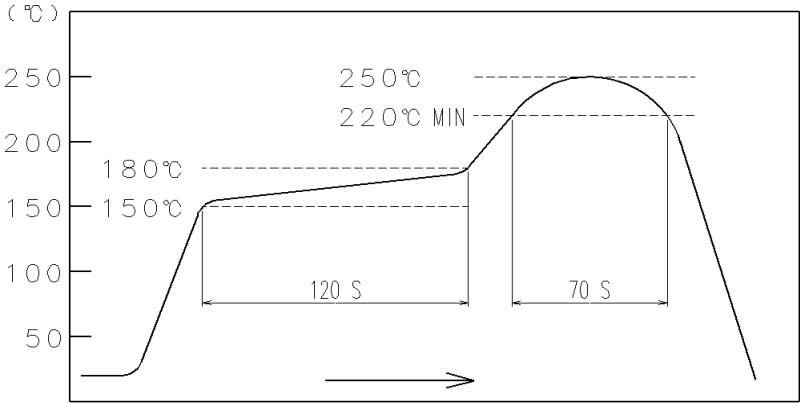


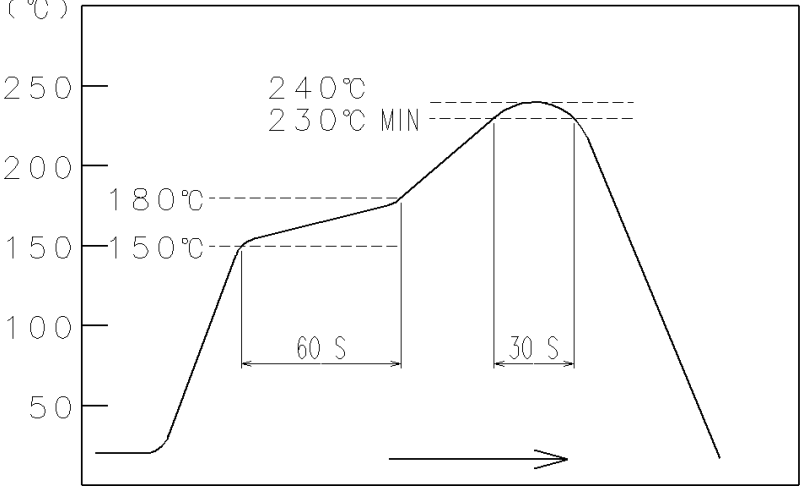

APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +85°C	STORAGE TEMPERATURE RANGE	-30°C TO +85 °C	
	VOLTAGE	30 V AC	OPERATING HUMIDITY RANGE	- % TO - %	
	CURRENT ① SIGNAL ONLY ② POWER APPLY	① 1 A/pin ② 1.8 A/pin (PIN No.1,5) 0.5 A/pin (PIN No.2-4)	APPLICABLE CABLE	—	
SPECIFICATIONS					
ITEM		TEST METHOD		REQUIREMENTS	QT AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X X
MARKING		CONFIRMED VISUALLY.			X X
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).		30 mΩ MAX.	X X
INSULATION RESISTANCE		500 V DC.		100 MΩ MIN.	X X
VOLTAGE PROOF		100 V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.	X X
CAPASITANCE		MEASURE ADJACENT TWO CONTACTS AT 1000±10 Hz AC VOLTAGE.		2 pF MAX.	X —
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES		A MAXIMUM RATE OF 12.5 mm/min. MEASURED BY APPLICABLE CONNECTOR.		INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 1 N MIN.	X —
MECHANICAL OPERATION		10000 TIMES INSERTIONS AND EXTRACTIONS.  MATING SPEED - MECHANICALLY OPERATED: 500 CYCLES / h - MANUALLY OPERATED: 200 CYCLES / h		① CONTACT RESISTANCE: NO INCREASE OF MORE THAN 10 mΩ FROM INITIAL VALUE. ② INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 1 N MIN. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
VIBRATION		FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS, TOTAL 6 h.		① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
RANDOM VIBRATION		FREQUENCY 50 TO 2000 Hz, AT 15 min, FOR 3 DIRECTIONS.			X —
SHOCK		490m/s <sup>2</sup> DURATIONS OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS, TOTAL 18 TIMES.			X —
ENVIRONMENTAL CHARACTERISTICS					
THERMAL SHOCK		TEMP -55 → 15 TO 35→ 85→ 15 TO 35 °C TIME 30 → 2 TO 3 → 30 → 2 TO 3 min UNDER 10 CYCLES. (MATING APPLICABLE CONNECTOR)		① CONTACT RESISTANCE: 70 mΩ MAX. ② INSULATION RESISTANCE: 10 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
HUMIDITY LIFE		TEMPERATURE -10~65 °C, HUMIDITY 90 TO 98 %, UNDER 7 CYCLES (168 h) (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
DRY HEAT		EXPOSED AT 85±2 °C , 96 h. (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
COLD		EXPOSED AT -40±2 °C , 96 h. (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X —
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER , 35 °C FOR 48h. (LEFT UNDER UNMATED CONDITION.)		NO HEAVY CORROSION.	X —
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△					
REMARK			APPROVED	NM. NISHIMATSU	15. 10. 27
HIROSE will not guarantee the performance on these specifications in case this product will be mated with the others which is not HIROSE's.			CHECKED	KN. ICHIKAWA	15. 10. 27
			DESIGNED	TS. ITO	15. 10. 27
			DRAWN	AK. AKIYAMA	15. 10. 27
Unless otherwise specified, refer to USB2.0, EIA364 or IEC 60512.					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-126145-30-00
HRS	SPECIFICATION SHEET		PART NO.	ZX80-B-5SA (30)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL242-0019-7-30	△ 1/2

SPECIFICATIONS					
ITEM		TEST METHOD	REQUIREMENTS	QT	AT
RESISTANCE TO SOLDERING HEAT		A PROFILE IS SHOWN IN FIG-1, UNDER 2 CYCLES.	NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
<div></div> <p>FIG - 1 <u>RESISTANCE TO SOLDERING HEAT</u> (TEMPERATURE AT TOP SURFACE OF CONNECTOR)</p> <p>RECOMMENDED PROFILE REFERS TO FIG - 2. (TEMPERATURE AT SMT LEADS)</p> <div></div> <p>FIG - 2 <u>RECOMMENDED REFLOW PROFILE TEMPERATURE</u></p>					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.	ELC-126145-30-00	
	SPECIFICATION SHEET		PART NO.	ZX80-B-5SA (30)	
	HIROSE ELECTRIC CO., LTD.		CODE NO	CL242-0019-7-30	 2/2