
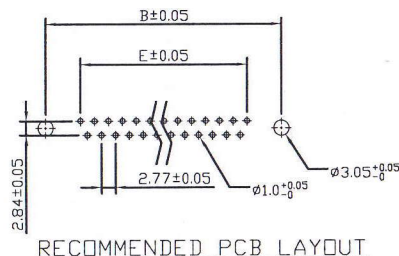


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS			
REV	ECN NO.	DESCRIPTION	APPROVED BY
A			KING CHIU
B			Xie

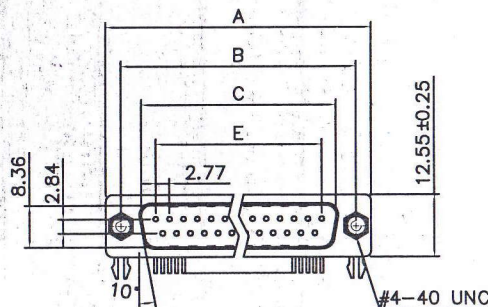




Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Boardlock : Steel, Tin Plated.
 Screwlock : Steel, Nickel Plated.

Electrical

Contact Resistance : 20 milliohms max
 Insulation Resistance : 1000 megohms at 500 VDC
 Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Voltage Rating : 250 VAC/rms 60Hz

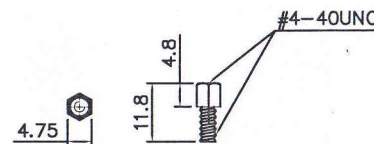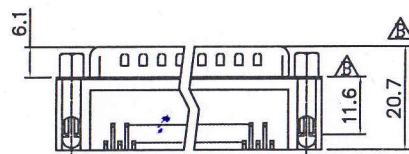

#4-40 unc screwlock installed

9.4mm Footprint

Dimensions				
Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

DIMENSIONS:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
☐ mm [INCH]	☐ INCH [mm]	☒ mm ONLY	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE:		DRAWN BY AND DATE JUSTIN XING 05-16-06	
DECIMALS	ANGLES	CHECKED BY AND DATE JUSTIN XING 05-16-06	
X. ±0.38 [0.015]	X* ±3°	APPROVED BY AND DATE KING CHIU 05-16-06	
.X ±0.25 [0.010]	.X* ±1.0°	THIRD ANGLE PROJECTION	
.XX ±0.13 [0.005]			
MATERIAL			
FINISH			
		SCALE: 1:1	SIZE: A3

ONIC CO., LTD.

D-SUB, E TYPE

3102

REV B

FILE NO.:

SHEET 1 OF 1

DO NOT SCALE DRAWING