
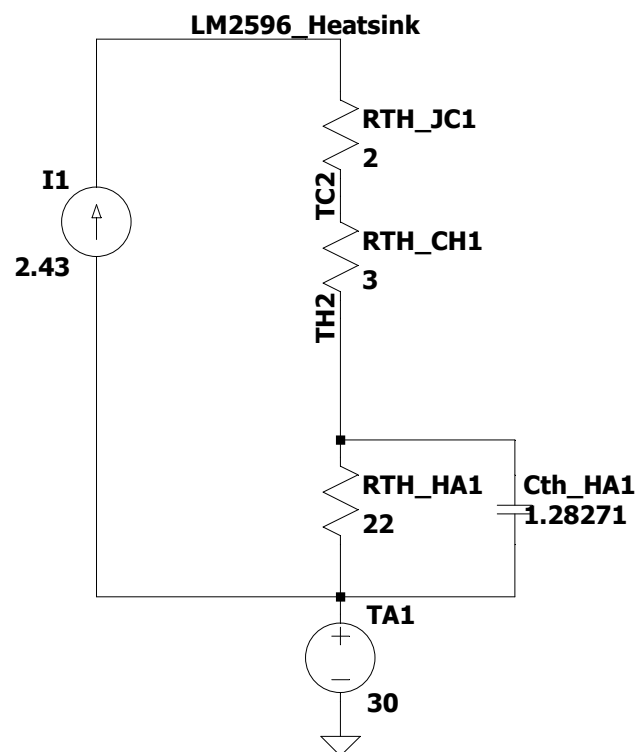


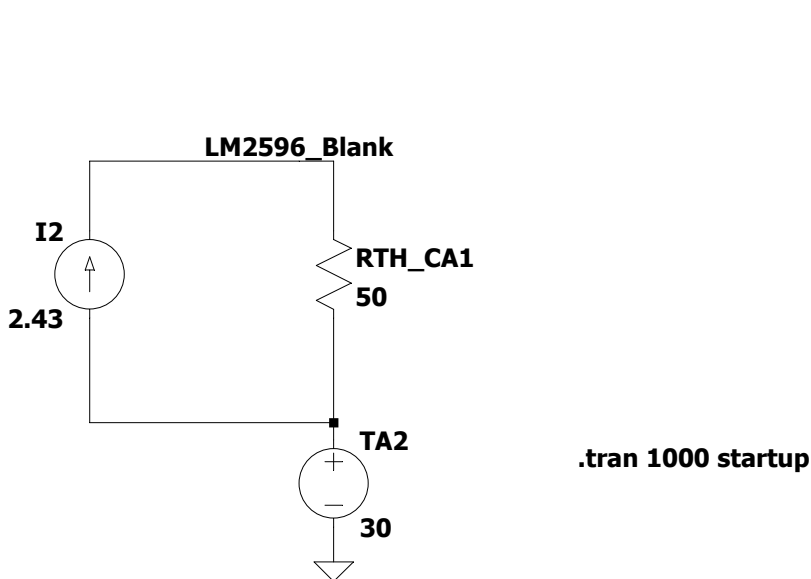

LM2596 Stromregler

Betriebstemperatur -40 °C bis 120 °C

Ohne Kühlkörper: R Junction-to-ambient $R_{th} = 50^{\circ}\text{C/W}$

Junction-to-case (top): R_{th} Junction-to-case = 2°C/W

Case-to-Heatsink: $R_{th} = 1.2^{\circ}\text{C/W}$ -> Wahrscheinlich schlechter -> 3°C/W

Heatsink to ambient: $R_{th} = 22^{\circ}\text{C/W}$

Efficiency $V_{IN} = 12\text{ V}$, $V_{OUT} = 3\text{ V}$, $I_{LOAD} = 3\text{ A}$ 73% -> 2.43 W Verlustleistung

-> ca- 27% Verlustleistung.