

Electronic Hooter ESB-03

Features

- Low Power Consumption.
- Suitable for operation on AC.
- Available in 110V AC/240V AC.
- Generates no radio frequency signal.
- Long Life.
- Exquisite appearance.





Ordering Information

Models	Function	Source Voltage	No of Tones
ESB-03	Audio Alarm	85-270 AC/DC , 24V AC/DC $\pm 10\%$	2

Front View

Rear View

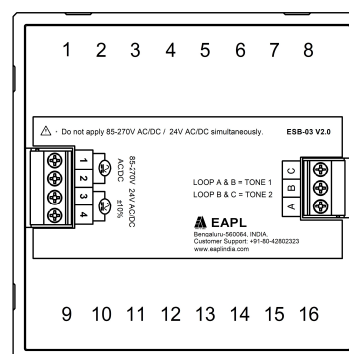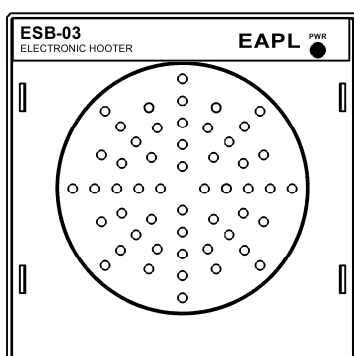


Over-all Dimension

Models	Dimension Details in mm			Cutout Dimension in mm	
	W	H	D	W	H
ESB-03	96	96	89	92	92

■ Specifications

Model	ESB-03
Function	Audio Alarm
Supply voltage	85-270 AC/DC , 24V AC/DC $\pm 10\%$
Power Consumption	15VA / 15W
Rated frequency	50Hz $\pm 5\%$ AC ONLY
Audio Output	100db to 120db
No. of tones	2
Ambient Temperature	Operating : -10°C to $+55^{\circ}\text{C}$ Storage : -25°C to $+80^{\circ}\text{C}$
Humidity	Max 95% RH @ 40°C
Dielectric strength	a) 2.5KV AC, 50Hz for 1 minute. (Between current carrying & non-current carrying parts)
Dimension (WxHxD)	96 x 96x 89mm
Panel cut out size	92 x 92mm
Electrical connection	Screw type terminals with self lifting clamps

Connection and Terminal Details

	ESB-03
Connection Details	

	ESB-03			
Terminal Details	1,2	-	85- 270V AC/DC	
	3,4	-	24V AC/DC	
	A,B,C	-	Tone Selection Terminal	
	A,B (Loop)	-	Tone-1	
	B,C (Loop)	-	Tone-2	