GigaDevice Semiconductor Inc.

GD32E230C-START 评估板 用户指南 V1.0



目录

目	目录1						
表	<u></u>		. 2				
1		i介					
2	功	能引脚分配	. 3				
3	入	.门指南	. 3				
4	硬	i件设计概述	. 4				
	4.1	供电电源	. 4				
	4.2	启动方式选择	. 4				
	4.3	LED 指示灯	. 4				
	4.4	按键	. 5				
	4.5	GD-Link	. 5				
	4.6	MCU	. 6				
	4.7	Ardunio	. 6				
5 例程使用指南		程使用指南	. 7				
	5.1	GPIO 流水灯	. 7				
	5.2	GPIO 按键轮询模式	. 7				
	5.3	EXTI 按键中断模式	. 8				
	5.4	TIMER 和按键触发外部中断	. 8				
6	妝	· ·木更新历史	10				





表

表 1.	引脚分配表	3
表 2.	版本更新历史	10



1 简介

GD32E230C-START 评估板使用 GD32E230C8T6 作为主控制器。评估板使用 Mini USB 接口提供 5V 电源。提供包括扩展引脚在内的及 Reset, Boot, Wakeup key, LED, GD-Link, Ardunio 等外设资源。更多关于开发板的资料可以查看 GD32E230C-START-V1.0 原理图。

2 功能引脚分配

表 1. 引脚分配表

功能	引脚	描述
LED	PA7	LED1
	PA8	LED2
	PA11	LED3
	PA12	LED4
RESET		K1-Reset
KEY	PA0	K2-Wakeup

3 入门指南

评估板使用 Mini USB 提供 5V 电源。下载程序到评估板需要使用 GD-Link 工具,在选择了正确的启动方式并且上电后,LEDPWR 将被点亮,表明评估板供电正常。


所有例程提供了 Keil 和 IAR 两个版本,其中 Keil 版的工程是基于 Keil MDK-ARM 5.25 uVision5 创建的,IAR 版的工程是基于 IAR Embedded Workbench for ARM 8.20.2 创建的。在使用过程中有如下几点需要注意:

- 1、如果使用 Keil uVision5 打开工程,安装 GigaDevice.GD32E230_DFP.1.0.0.pack,以加载相关文件。
- 2、如果使用 IAR 打开工程, 安装 IAR_GD32E230_ADDON_1.0.0.exe, 以加载相关文件。




4 硬件设计概述


4.1 供电电源

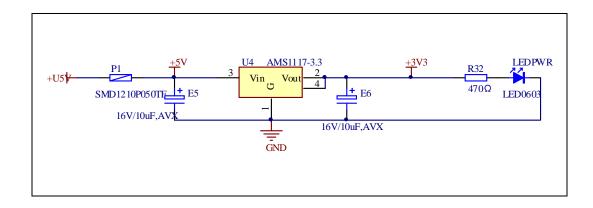

4.2 启动方式选择




4.3 LED 指示灯

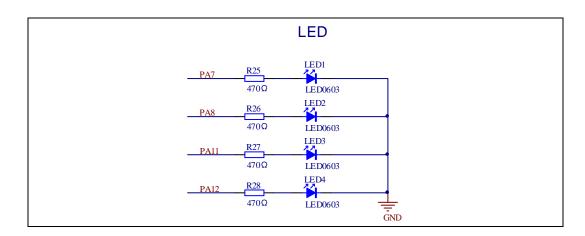




4.4 按键

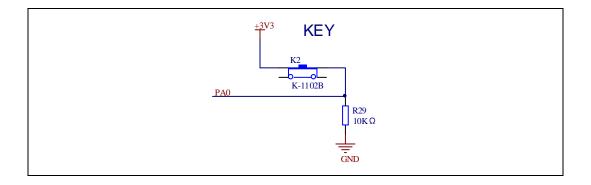


4.5 GD-Link

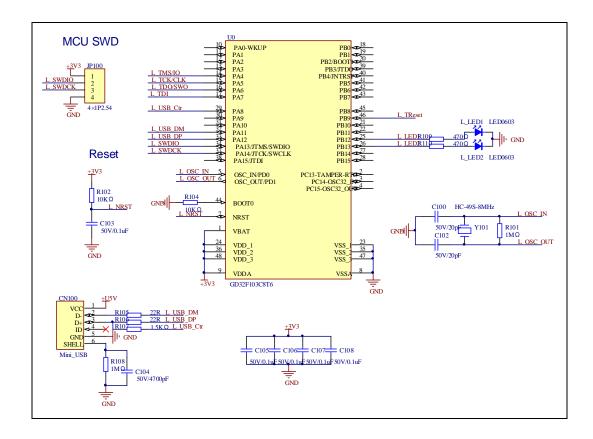




4.6 MCU

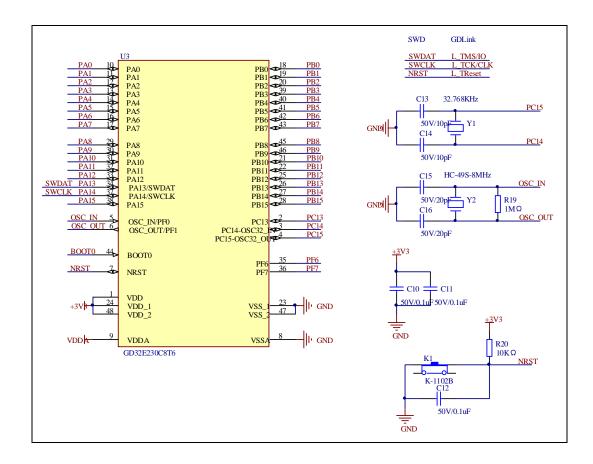

4.7 Ardunio

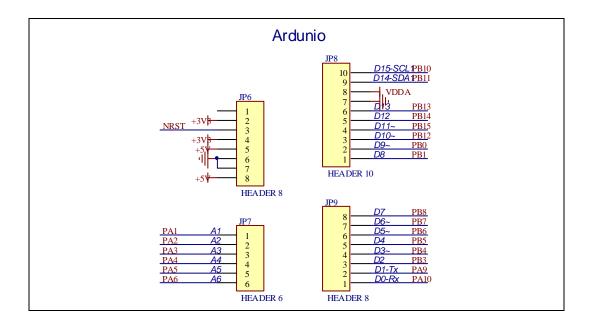



5 例程使用指南

5.1 GPIO 流水灯

5.1.1 **DEMO** 目的

这个例程包括了 GD32 MCU 的以下功能:

- 学习使用 GPIO 控制 LED
- 学习使用 SysTick 产生 1ms 的延时

GD32E230C-START 开发板上有 4 个 LED。LED1, LED2, LED3 和 LED4 通过 GPIO 控制着。这个例程将讲述怎么点亮 LED。

5.1.2 DEMO 执行结果

下载程序< 01_GPIO_Runing_Led >到开发板上, LED1, LED2, LED3 和 LED4 将顺序每间隔 1 秒点亮然后熄灭, 一直重复这个过程。

5.2 GPIO 按键轮询模式

5.2.1 **DEMO**目的

这个例程包括了 GD32 MCU 的以下功能:

- 学习使用 GPIO 控制 LED 和按键
- 学习使用 SysTick 产生 1ms 的延时

GD32E230C-START 开发板有两个按键和四个 LED。其中,两个按键是 Reset 按键和 Wakeup 按键; LED1, LED2, LED3 和 LED4 可通过 GPIO 控制。

这个例程讲述如何使用 Wakeup 按键控制 LED1。当按下 Wakeup 按键,将检测 IO 端口的输入值,如果输入为高电平,将等待延时 50ms。之后,再次检测 IO 端口的输入状态。如果输入仍然为高电平,表明按键成功按下,翻转 LED1 的输出状态。

5.2.2 DEMO 执行结果

下载程序<02_GPIO_KeyBoard_Polling_mode>到开发板上,首先,所有的灯会亮灭一次用于测试,然后点亮 LED1,接下 Wakeup 按键,LED1 将会熄灭,再次接下 Wakeup 按键,LED1 将会点亮。



5.3 EXTI 按键中断模式

5.3.1 **DEMO** 目的

这个例程包括了 GD32 MCU 的以下功能:

- 学习使用 GPIO 控制 LED 和按键
- 学习使用 EXTI 产生外部中断

GD32E230C-START 开发板有两个按键和四个 LED。其中,两个按键是 Reset 按键和 Wakeup 按键; LED1, LED2, LED3 和 LED4 可通过 GPIO 控制。

这个例程讲述如何使用 EXTI 外部中断线控制 LED1。当按下 Wakeup 按键,将产生一个外部中断,在中断服务函数中,应用程序翻转 LED1 的输出状态。

5.3.2 DEMO 执行结果

下载程序<03_EXTI_KeyBoard_Interrupt_mode>到开发板,首先,所有的灯会亮灭一次用于测试,然后点亮 LED1,接下 Wakeup 按键,LED1 将会熄灭,再次接下 Wakeup 按键,LED1 将会点亮。

5.4 TIMER 和按键触发外部中断

5.4.1 **DEMO** 目的

这个例程包括了 GD32 MCU 的以下功能:

- 学习使用 GPIO 控制 LED 和按键
- 学习使用 EXTI 产生外部中断
- 学习使用 TIMER 产生 PWM

GD32E230C-START 开发板有两个按键和四个 LED。其中,两个按键是 Reset 按键和 Wakeup 按键; LED1, LED2, LED3 和 LED4 可通过 GPIO 控制。

这个例程讲述如何使用 TIMER 生成 PWM产生外部中断然后在中断服务程序中翻转 LED2 的输出状态,以及如何使用 EXTI 外部中断线控制 LED1。当按下 Wakeup 按键,将产生一个外部中断,在中断服务函数中,应用程序翻转 LED1 的输出状态。

5.4.2 DEMO 执行结果

下载程序<04_TIMER_KeyBoard_EXTI>到开发板,首先,所有的灯会亮灭一次用于测试,接下 Wakeup 按键,LED1 将会点亮,再次按下 Wakeup 按键,LED1 将会熄灭。使用杜



邦线将 PA6(TIMER2_CH0)和 PB11, LED2 的输出状态会每隔 500ms 翻转一下。



6 版本更新历史

表 2. 版本更新历史

版本号	描述	日期
1.0	初始发布版本	2018年10月25日



Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the "Product"), is owned by the Company under the intellectual property laws and treaties of the People's Republic of China and other jurisdictions worldwide. The Company reserves all rights under such laws and treaties and does not grant any license under its patents, copyrights, trademarks, or other intellectual property rights. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

The Company makes no warranty of any kind, express or implied, with regard to this document or any Product, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The Company does not assume any liability arising out of the application or use of any Product described in this document. Any information provided in this document is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Except for customized products which has been expressly identified in the applicable agreement, the Products are designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only. The Products are not designed, intended, or authorized for use as components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, atomic energy control instruments, combustion control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or Product could cause personal injury, death, property or environmental damage ("Unintended Uses"). Customers shall take any and all actions to ensure using and selling the Products in accordance with the applicable laws and regulations. The Company is not liable, in whole or in part, and customers shall and hereby do release the Company as well as it's suppliers and/or distributors from any claim, damage, or other liability arising from or related to all Unintended Uses of the Products. Customers shall indemnify and hold the Company as well as it's suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Products.

Information in this document is provided solely in connection with the Products. The Company reserves the right to make changes, corrections, modifications or improvements to this document and Products and services described herein at any time, without notice.