

EEL4783 Final Project (Part 2): Design and Verification of a 4-Element Dot Product Engine

Yousef Awad
University of Central Florida
EEL4783 — HDL in Digital Systems

April 26, 2026

1 Design Choice

For this project, I chose the **RTL (SystemVerilog)** implementation track. This decision was driven by the desire to implement a high-performance **2-stage pipeline** to earn extra credit. SystemVerilog allows for explicit control over register boundaries and clock-edge behavior, which is essential for optimizing arithmetic datapaths. Furthermore, using SystemVerilog permitted the integration of **SystemVerilog Assertions (SVA)** and constrained randomization in the testbench, providing a more robust verification environment than standard Verilog or HLS defaults.

2 Architecture

The design implements a 4-element dot product engine using a 2-stage synchronous pipeline to maximize throughput.

- **Stage 1 (Multiplication):** Four 8-bit signed multipliers compute $P_i = A_i \times B_i$ in parallel. These results are captured in the `products_reg` array on the rising edge of the clock.
- **Stage 2 (Addition):** An adder tree (implemented as a single-cycle sum for this width) aggregates the four 16-bit products from the pipeline registers and drives the final output `y`.

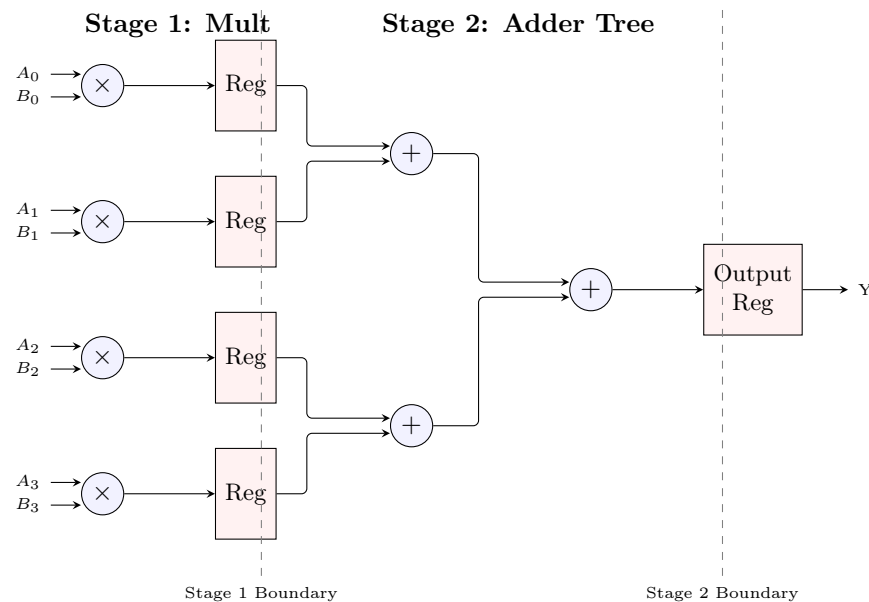


Figure 1: Schematic of the 4-element dot product engine showing the 2-stage pipelined architecture.

4 Reflection

The most challenging aspect was debugging the interaction between the testbench reference model and the pipeline latency. Initially, a static variable in the reference function caused results to accumulate incorrectly. Resolving this required changing the function to `automatic`. Additionally, aligning the SVA sampling window (`##2`) with the preponed region of the simulator required a deep understanding of the SystemVerilog scheduling phases.

Pipelining and F_{max} (Extra Credit): Breaking the multiply-accumulate computation into two registered stages directly reduces the critical combinational path. In the single-cycle implementation, the critical path spans the full signed multiplication and the 4-input addition tree. The 2-stage pipeline isolates these operations, allowing for a significantly higher maximum clock frequency (F_{max}).

Table 1 shows the timing improvement based on synthesis using the `class.db` library and a 10ns target clock. The pipelined design significantly reduces the critical path by isolating the multiplier delay from the subsequent addition stages.

Table 1: Synthesis Timing Comparison (Synopsys Design Compiler)

Design	Crit. Path (Arrival)	Slack (10ns)	Est. F_{max}
Single-Cycle (Registered Out)	16.28 ns	-7.08 ns	58.6 MHz
Pipelined (2-Stage)	13.03 ns	-3.83 ns	72.3 MHz

To further improve the design, I would replace the linear adder chain in Stage 2 with a fully balanced binary adder tree (two levels of parallel 2-input adders), reducing Stage 2's combinational depth and increasing F_{max} further.

A Source Code

A.1 dot_product.sv (RTL)

```

1  `timescale 1ns/1ps
2
3  // EEL4783: Final Project Part 2
4  // Project Title: "The 4-Element Dot Product Engine"
5  // Description: A pipelined 4-element dot product accelerator with handshake.
6  //               Stage 1: Multiplications ( $A_i * B_i$ )
7  //               Stage 2: Addition of products
8  // Latency: 2 clock cycles
9
10 module dot_product #(
11     parameter int DATA_WIDTH = 8,
12     parameter int VECTOR_SIZE = 4,
13     parameter int OUT_WIDTH = 16
14 ) (
15     input logic          clk,
16     input logic          rst,    // Active-high synchronous reset
17     input logic          vld_in, // Input valid signal
18     input logic signed [DATA_WIDTH-1:0] a [VECTOR_SIZE-1:0],
19     input logic signed [DATA_WIDTH-1:0] b [VECTOR_SIZE-1:0],
20     output logic          vld_out, // Output valid signal
21     output logic signed [OUT_WIDTH-1:0] y
22 );
23
24 // Pipeline Registers
25 logic signed [OUT_WIDTH-1:0] products_reg [VECTOR_SIZE-1:0];
26 logic          vld_pipe_reg;
27
28 // Stage 1: Multiplication & Valid Propagation
29 always_ff @(posedge clk) begin
30     if (rst) begin
31         vld_pipe_reg <= 1'b0;
32         for (int i = 0; i < VECTOR_SIZE; i++) begin
33             products_reg[i] <= '0;
34         end
35     end else begin
36         vld_pipe_reg <= vld_in;
37         for (int i = 0; i < VECTOR_SIZE; i++) begin
38             products_reg[i] <= a[i] * b[i];
39         end
40     end
41 end
42
43 // Stage 2: Addition & Valid Propagation
44 always_ff @(posedge clk) begin
45     if (rst) begin
46         vld_out <= 1'b0;
47         y <= '0;
48     end else begin
49         vld_out <= vld_pipe_reg;
50         // Summing the registered products from Stage 1
51         y <= products_reg[0] + products_reg[1] + products_reg[2] +
52             products_reg[3];
53     end
54 end

```

```
54  
55 endmodule
```

A.2 dot_product_tb.sv (Testbench)

```

1  `timescale 1ns/1ps
2
3  // Transaction class for constrained randomization
4  class dot_product_transaction;
5      rand bit signed [7:0] a [3:0];
6      rand bit signed [7:0] b [3:0];
7
8      constraint boundary_values {
9          foreach (a[i]) {
10             a[i] dist {8'h7F := 1, 8'h80 := 1, [-127:126] := 10};
11         }
12         foreach (b[i]) {
13             b[i] dist {8'h7F := 1, 8'h80 := 1, [-127:126] := 10};
14         }
15     }
16 endclass
17
18 module dot_product_tb;
19
20     parameter int DATA_WIDTH = 8;
21     parameter int VECTOR_SIZE = 4;
22     parameter int OUT_WIDTH = 16;
23     parameter int CLK_PERIOD = 10;
24
25     logic                clk;
26     logic                rst;
27     logic                vld_in;
28     logic                vld_out;
29     logic signed [7:0] a [3:0];
30     logic signed [7:0] b [3:0];
31     logic signed [15:0] y;
32
33     // Instantiate DUT
34     dot_product #(
35         .DATA_WIDTH(DATA_WIDTH),
36         .VECTOR_SIZE(VECTOR_SIZE),
37         .OUT_WIDTH(OUT_WIDTH)
38     ) dut (.*);
39
40     // Clock generation - Guaranteed synchronous 10ns period
41     initial begin
42         clk = 0;
43         forever #(CLK_PERIOD/2) clk = ~clk;
44     end
45
46     // Verdi Waveform Dumping
47     initial begin
48         $fsdbDumpfile("inter.fsdb");
49         $fsdbDumpvars(0, dot_product_tb, "+all", "+mda");
50     end
51
52     // Reference model
53     function automatic signed [15:0] get_expected(
54         logic signed [7:0] va [3:0],
55         logic signed [7:0] vb [3:0]
56     );
57         int sum = 0;

```

```

58     for (int i = 0; i < 4; i++) begin
59         sum += va[i] * vb[i];
60     end
61     return signed'(sum[15:0]);
62 endfunction
63
64 initial begin
65     dot_product_transaction tr;
66     tr = new();
67
68     $display("\n[Time %0t] Simulation Started", $time);
69
70     // Synchronous Reset
71     rst = 1;
72     vld_in = 0;
73     foreach (a[i]) a[i] = 0;
74     foreach (b[i]) b[i] = 0;
75     repeat (3) @(posedge clk);
76
77     @(negedge clk);
78     rst = 0;
79     $display("[Time %0t] Reset De-asserted", $time);
80
81     // Run 20 randomized test cases
82     $display("\nStarting Randomized Tests...");
83     for (int i = 1; i <= 20; i++) begin
84         if (!tr.randomize()) $fatal("Randomization failed");
85
86         @(negedge clk);
87         vld_in = 1;
88         foreach (a[j]) a[j] = tr.a[j];
89         foreach (b[j]) b[j] = tr.b[j];
90
91         $display("[Time %0t] Iteration %0d: Driving A={%d,%d,%d,%d} B={%d,%d,%d,%d} | Expected Y (at +2 cycles) = %d",
92             $time, i, a[3], a[2], a[1], a[0], b[3], b[2], b[1], b[0],
93             get_expected(a, b));
94     end
95
96     // Finish driving
97     @(negedge clk);
98     vld_in = 0;
99
100    repeat (10) @(posedge clk);
101    $display("Done: 20 Randomized Tests Completed.");
102    $finish;
103 end
104
105 // --- SystemVerilog Assertions (Extra Credit) ---
106 // Pipeline Latency = 2 cycles
107 // T0: vld_in high, inputs sampled at posedge
108 // T1: products_reg updated (Stage 1)
109 // T2: y updated, vld_out goes high (Stage 2)
110 property p_check_result;
111     logic signed [15:0] local_exp;
112     @(posedge clk) disable iff (rst)
113         vld_in |-> (1, local_exp = get_expected(a, b)) ##2 (vld_out && (y ==
114             local_exp));
115 endproperty

```



```
114
115     assert_dot_product: assert property (p_check_result)
116         else $error("Mismatch! Y=%d, Expected=%d", y, $past(get_expected(a, b), 2)
117             );
118
119     // Monitor valid outputs
120     always @(posedge clk) begin
121         if (vld_out && !rst) begin
122             $display("[Time %0t] VALID OUT: Y=%d", $time, y);
123         end
124     end
125 endmodule
```