XY quality assurance + potential energy shift

Paul Filip

XY quality assurance

- Python script for automatic testing
  - Unit tests for XY run information
  - Replaces plot_scripts code
  - One application (= easy to use)
  - Hard (TBD) selection criteria

Paul Filip[a]

[a]IAP, Karlsruhe Institute of Technology ⬩KIT, Germany,
[b]ASCR, Czech Academy of Sciences ⬩FZU, Czech Republic,
[c]IASF, National Institute for Astrophysics ⬩, Italy,
[d]on site, Pierre Auger Observatory ⬩, Argentina

GAP–2024-NNN

Quality assurance for XY Scanner calibration measurements

November 2024

Abstract

The XY Scanner [0] offers a new method of calibrating the Fluorescence Detector (FD) cameras. It has been shown that the systematic uncertainty of pixel calibration constants can be minimized to almost half (from 9% to 4.4%) by using a smaller light source over the standard (Drum) calibration. We examine the data from past XY Scanner measurement runs, and propose test statistics as well as quality cuts based on which the usability of future XY Scanner shall be evaluated.

Keywords: Fluorescence, Detector, FD, XY, Scanner, Quality, Assurance, Calibration
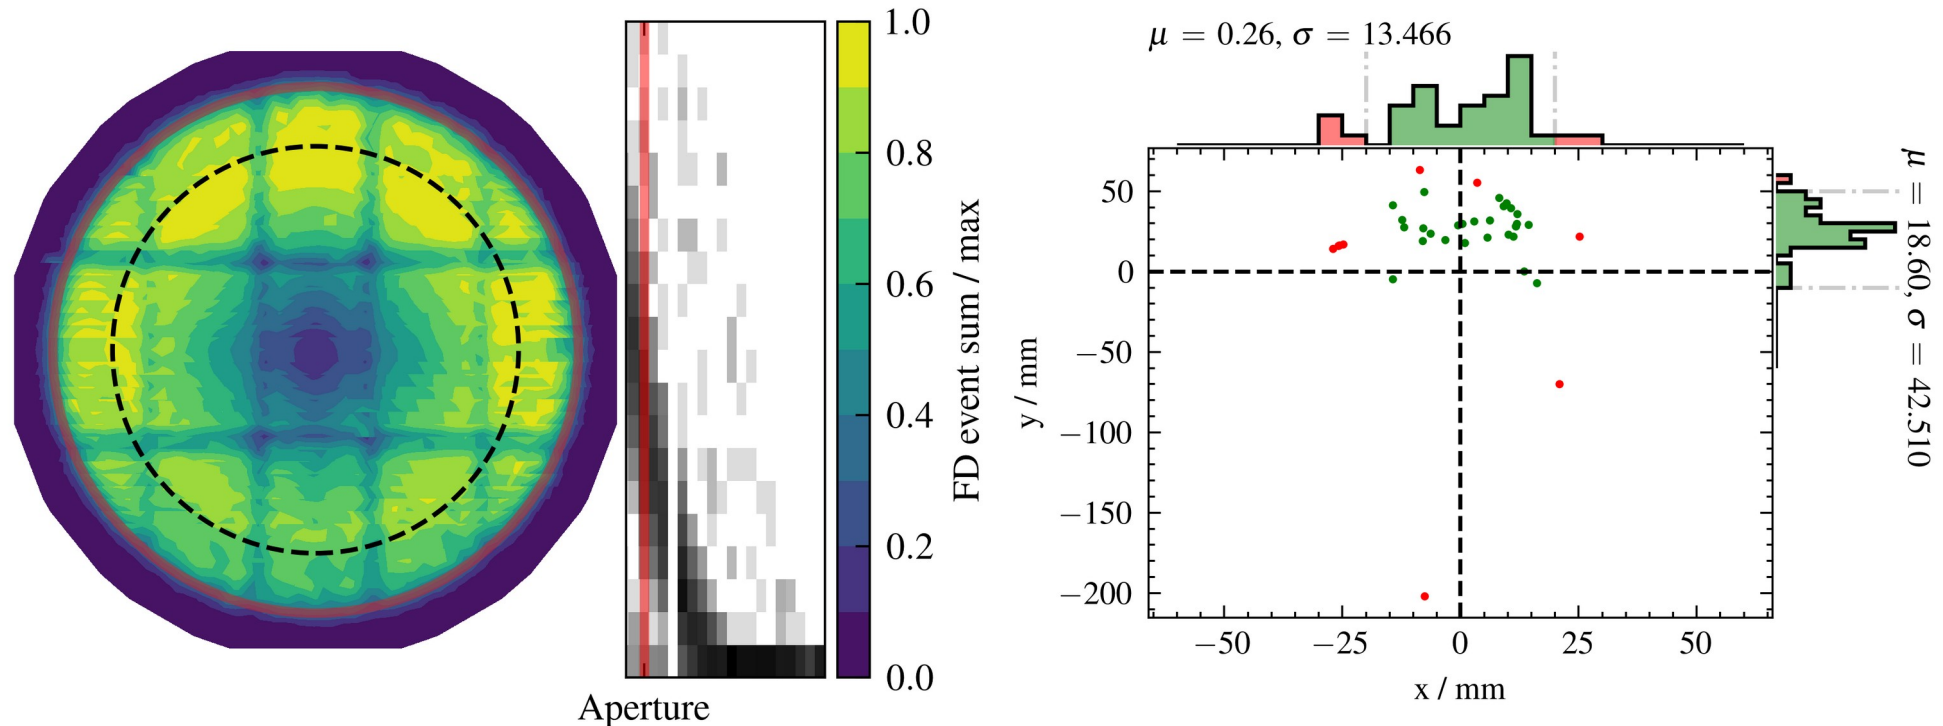
Unit tests – defining limits
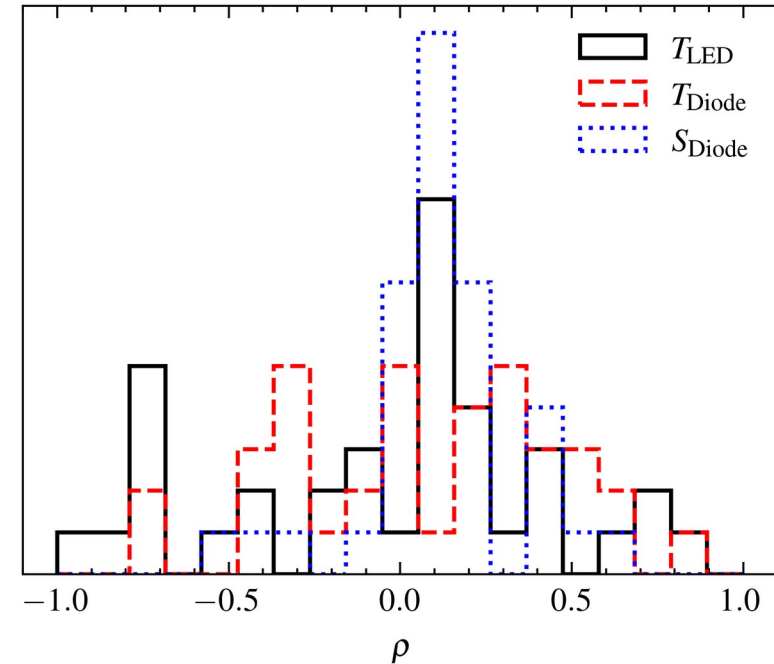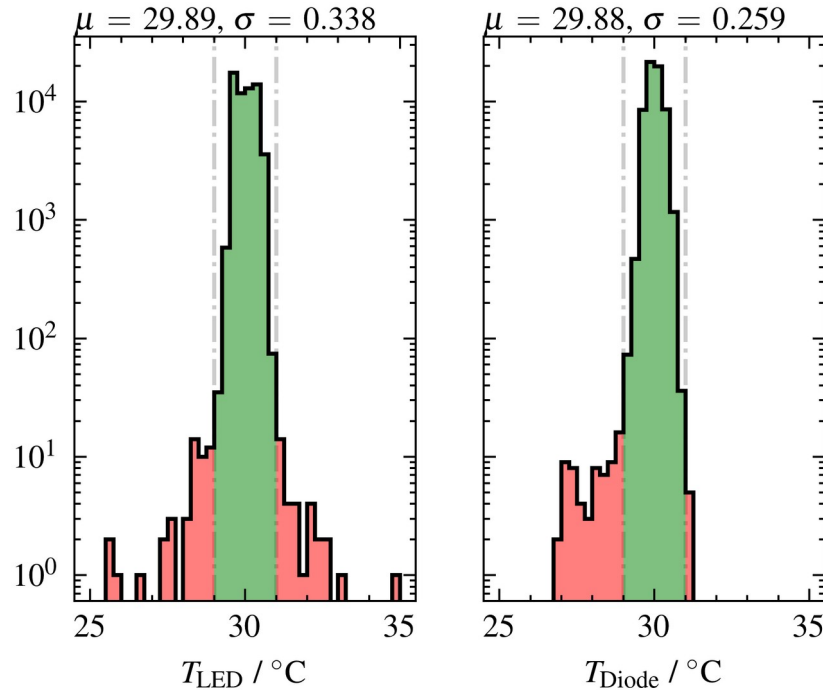
- Log distribution of all test statistics over all XY runs with:
  - OLO sphere, LED up, 6 cm stepsize, d=10 cm, full aperture

Unit tests – defining limits

- Log distribution of all test statistics over all XY runs with:
  - OLO sphere, LED up, 6 cm stepsize, d=10 cm, full aperture
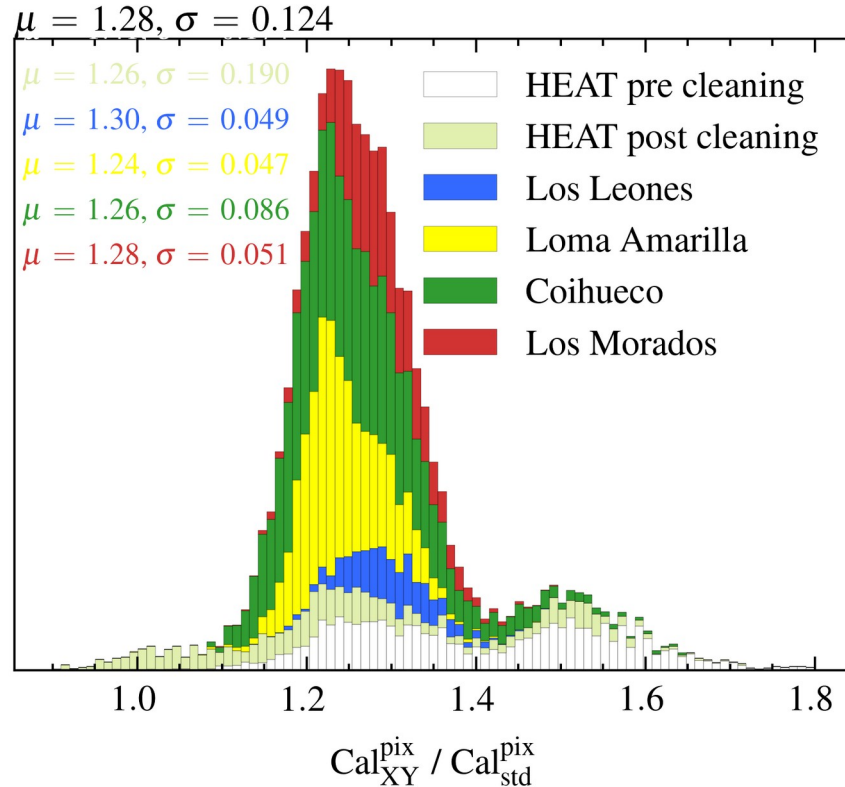
paul.filip@kit.edu

Unit tests – defining limits

- Log distribution of all test statistics over all XY runs with:
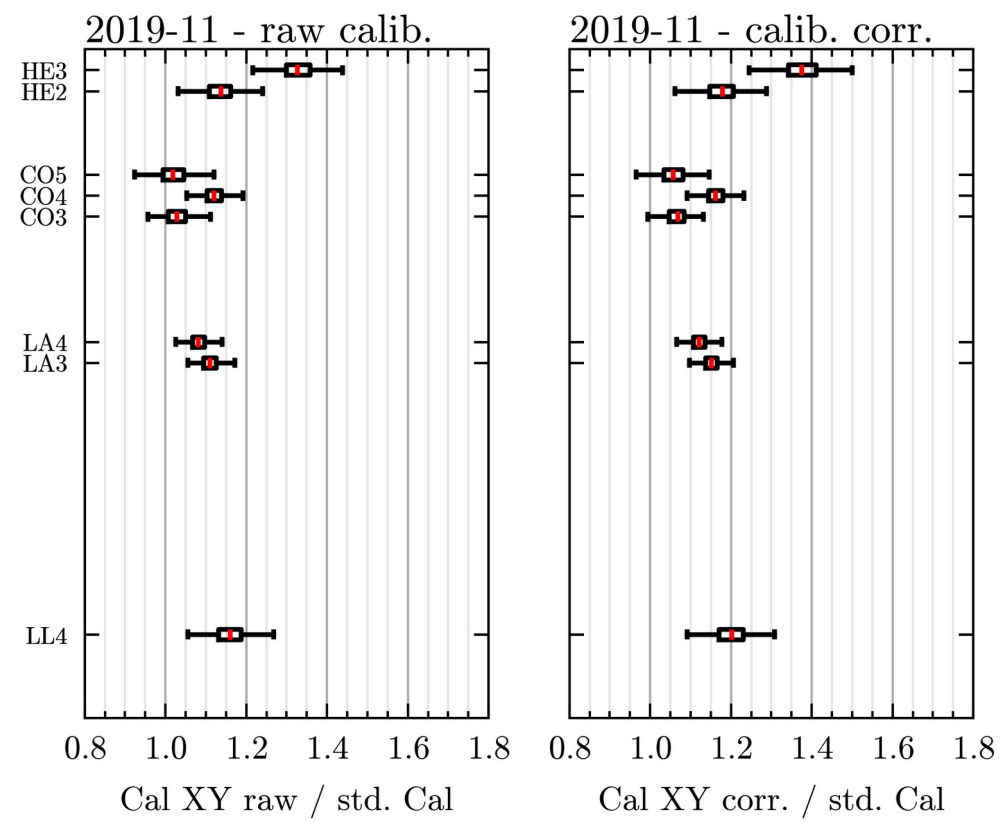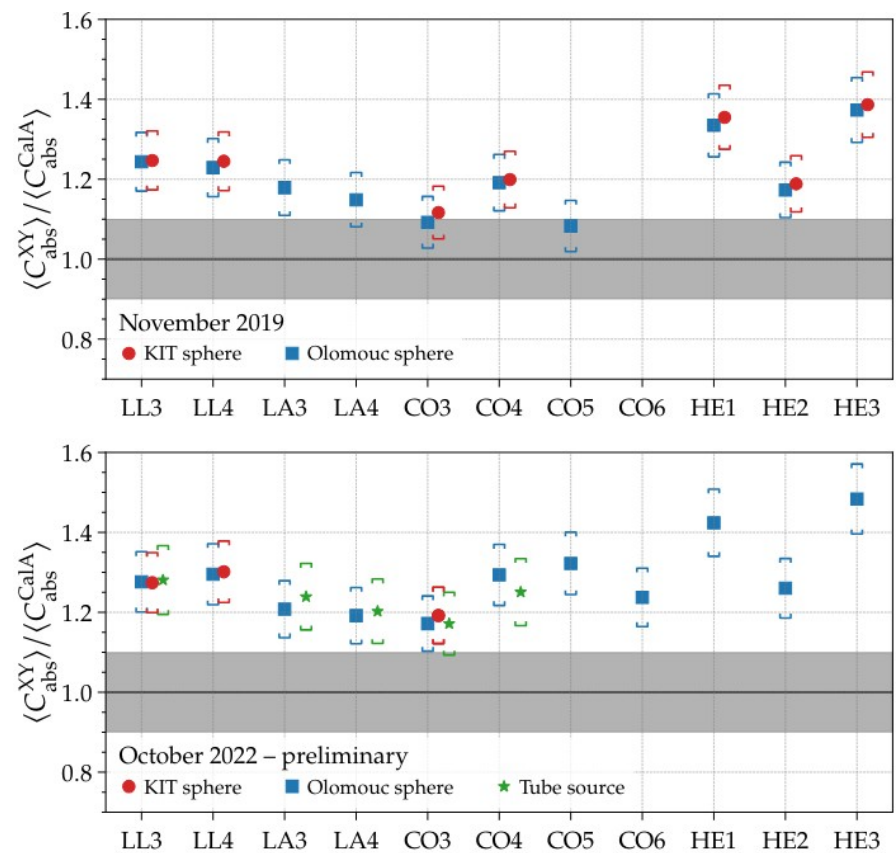 - OLO sphere, LED up, 6 cm stepsize, d=10 cm, full aperture
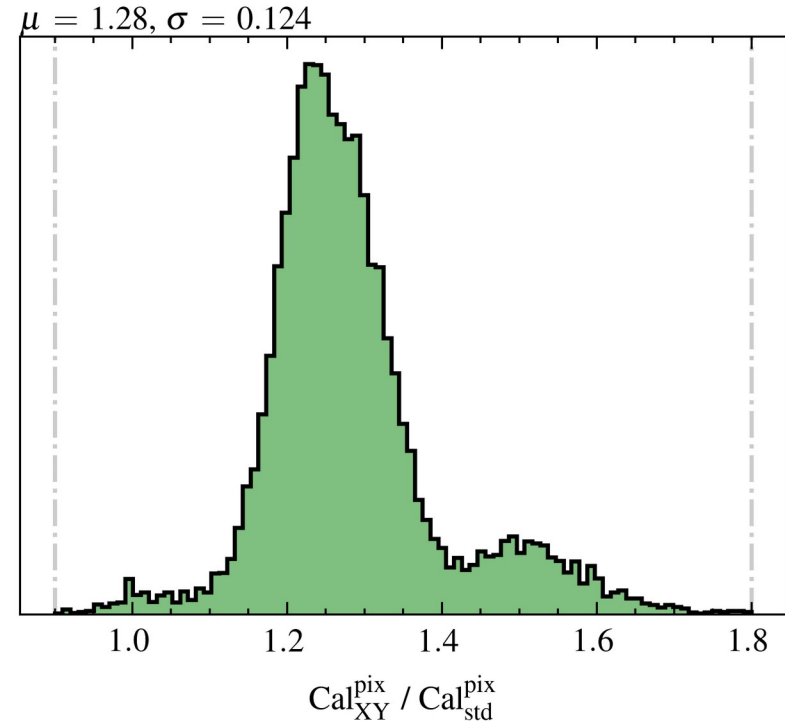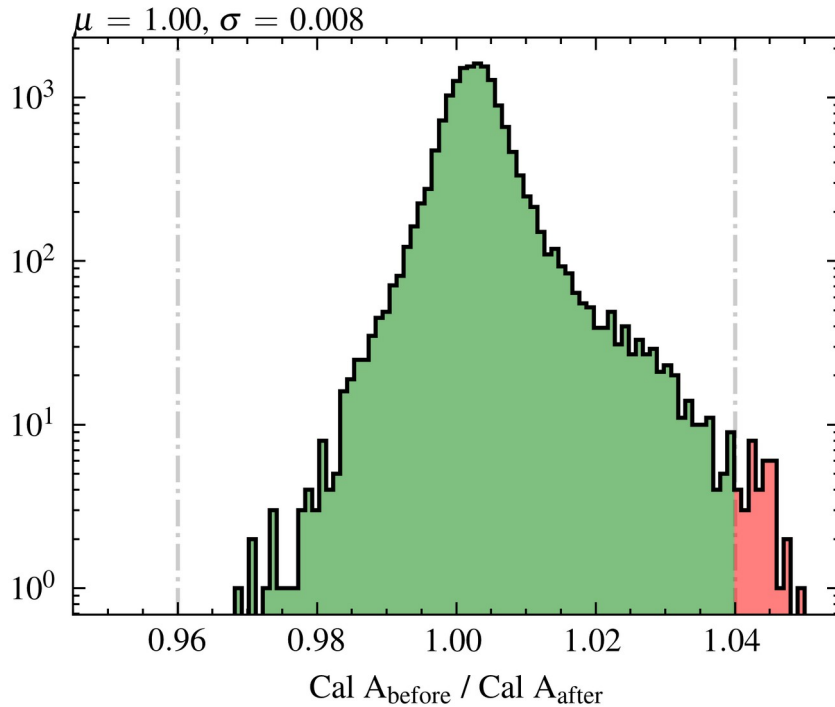
Potential energy shift

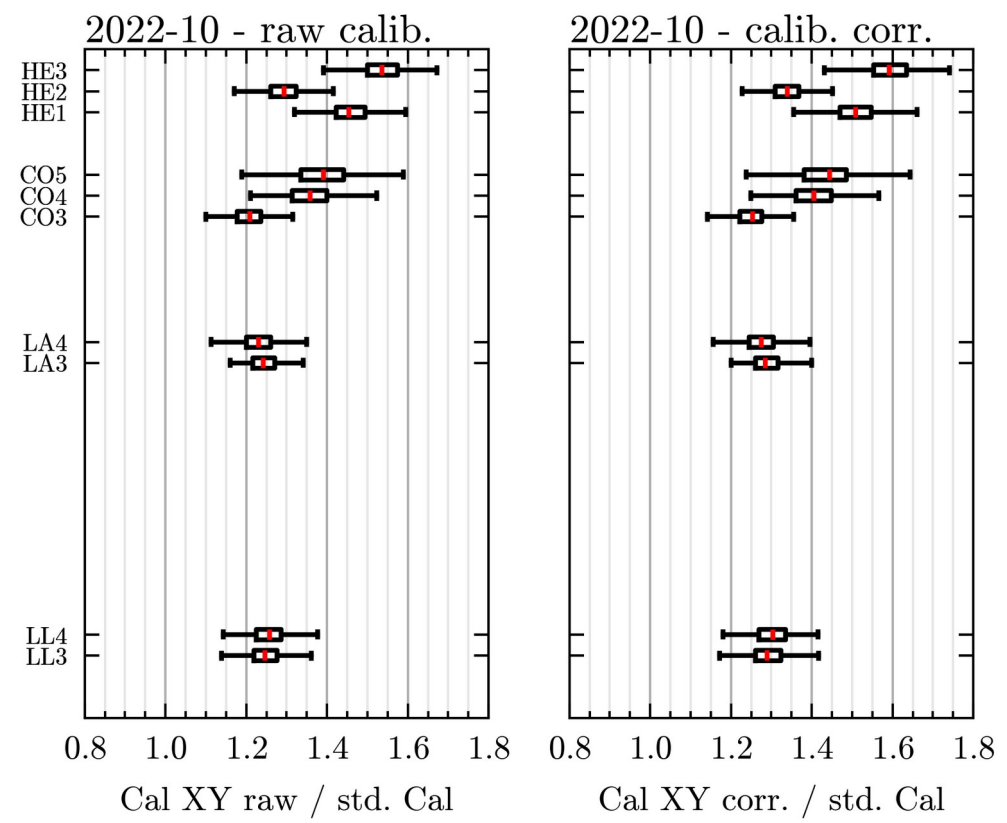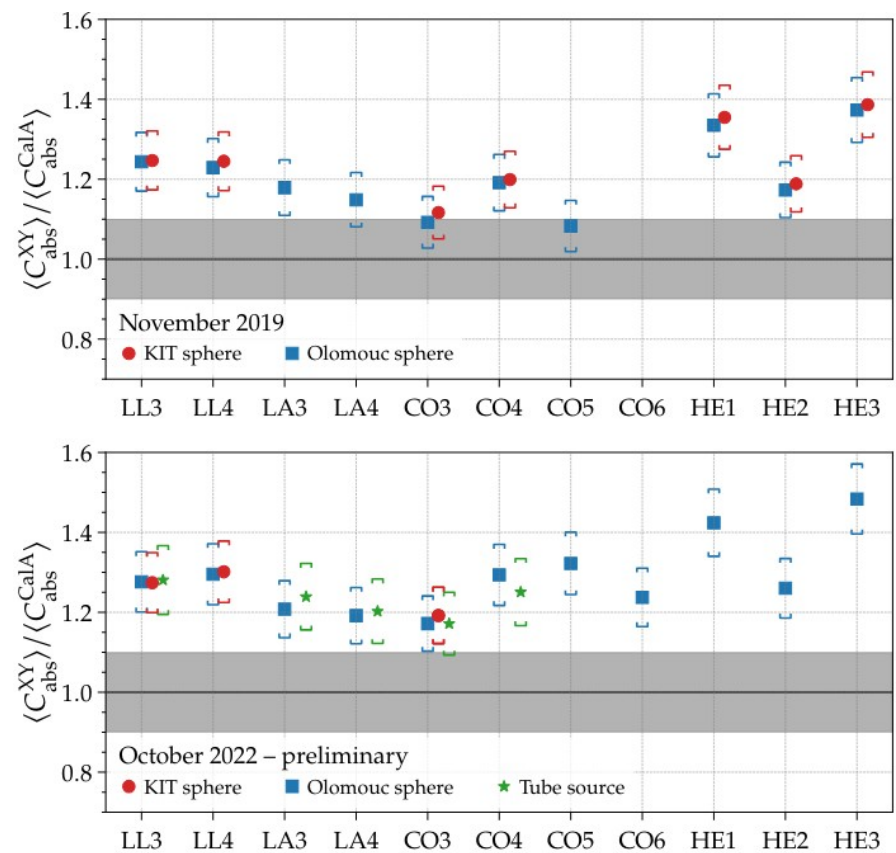- Given roughly by Cal XY ratio (corr.) vs. Cal A ratio

- Average +25% change!
- HE/CO have large spread
- Mean driven by outliers

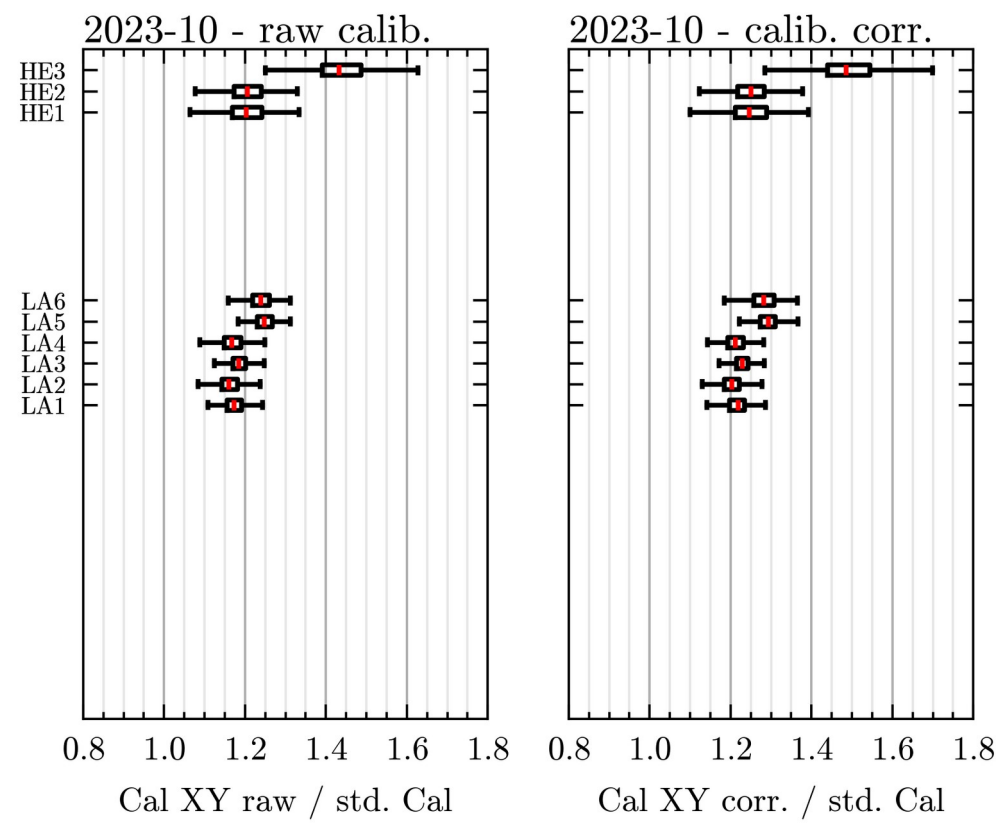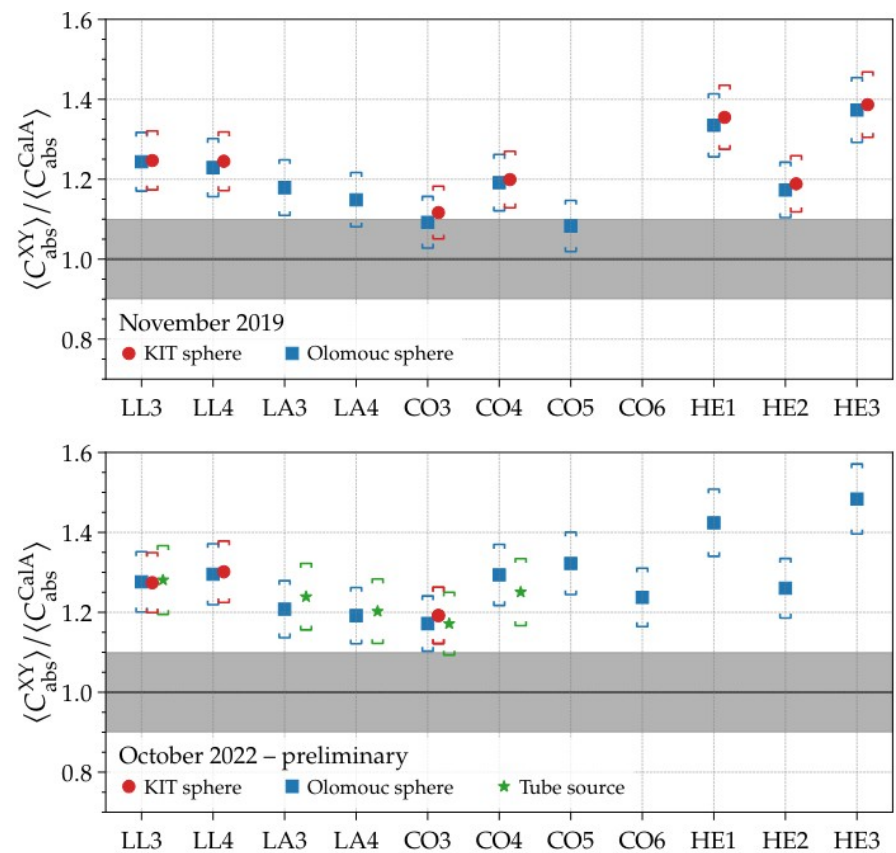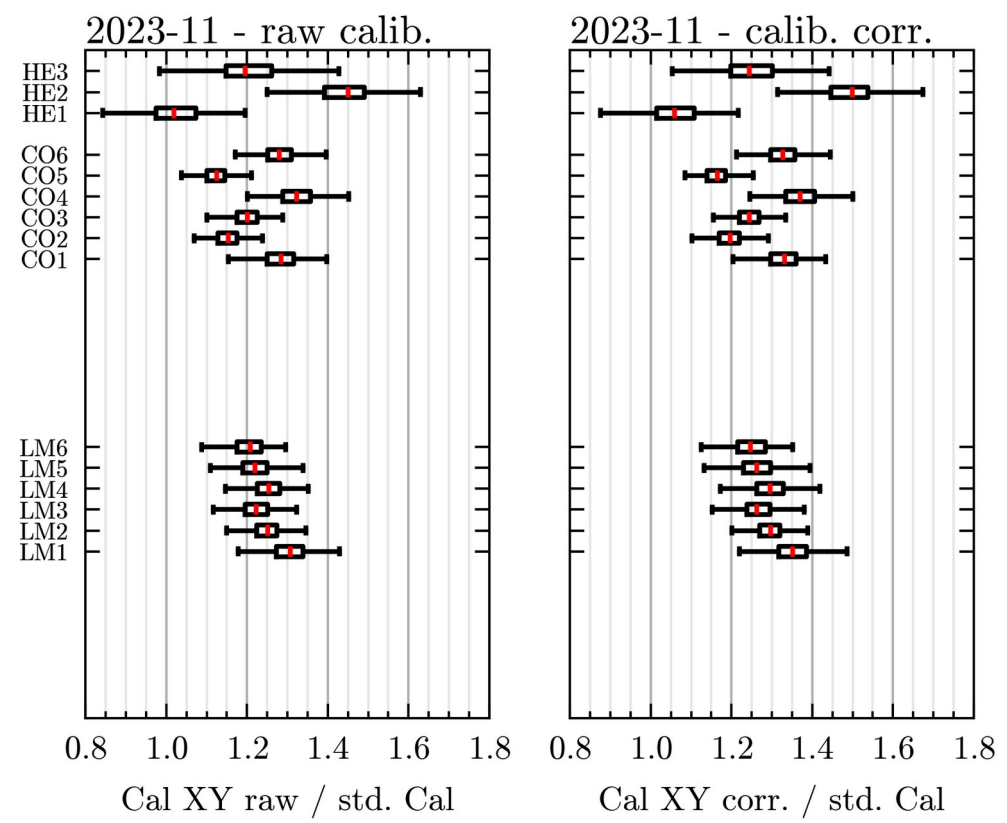- Differs from Christophs results by few percent
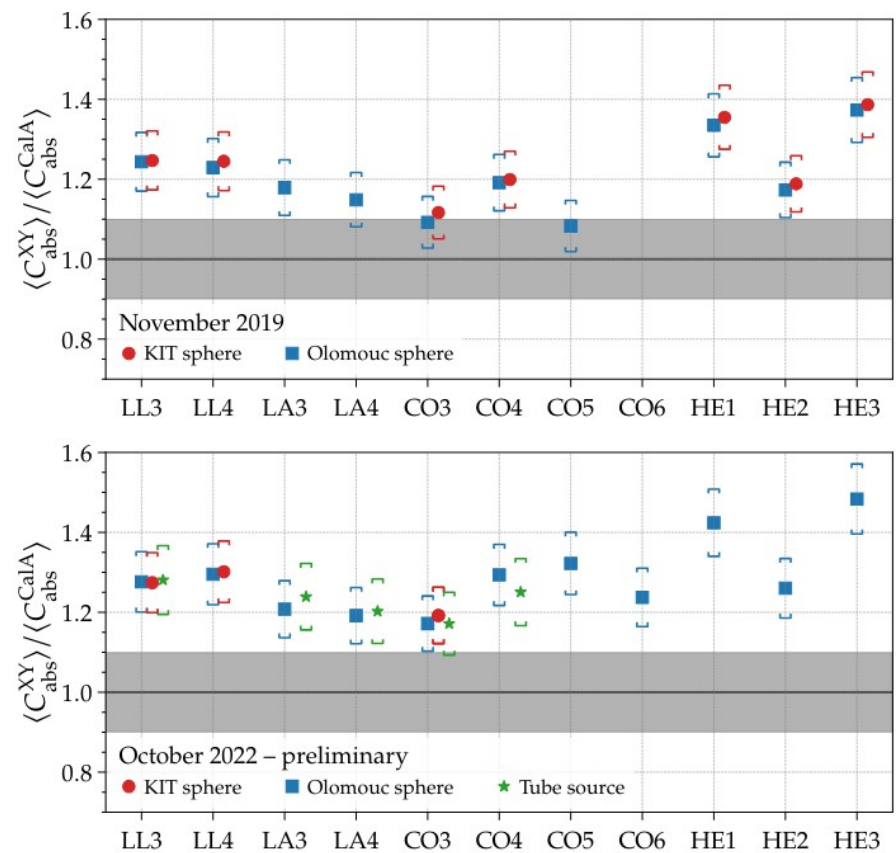
Potential energy shift

Potential energy shift

Potential energy shift

Potential energy shift

paul.filip@kit.edu

Backup