Remark/注記


	Flange フランジ		Stop valve 玉型弁
	Union joint ユニオン接手		Union valve ユニオンバルブ
	Bite joint クイコミ接手		Check valve 逆止弁
	Spectacle flange メガネフランジ		Cock コック
	Banjo joint 自在接手	STP	Steel pipe 鋼管
	Flexible tube フレキシブルチューブ	CUP	Copper pipe 銅管
	Reducer レデューサー	Ⓟ	Pressure gauge 圧力計
		Ⓣ	Thermometer 温度計
	By DAIHATSU ダイハツ施工		Thermo resistance connection G1/2 温度センサ取付座 G1/2
	By Shipyard 造船所殿施工		Press. switch test connection G1/4 圧力スイッチテスト座 G1/4

(NOTICE) JIS companion flanges are supplied by DAIHATSU.
(注) ＪＩＳ標準の相フランジはダイハツ支給

Shipyard piping 造船所配管

Joint/接手 ① (DAIHATSU SUPPLY/ダイハツ所掌)

Drain pipe of L.O. priming pump should be arranged by shipyard
プライミングポンプのドレン管は造船所殿にて設けてください。

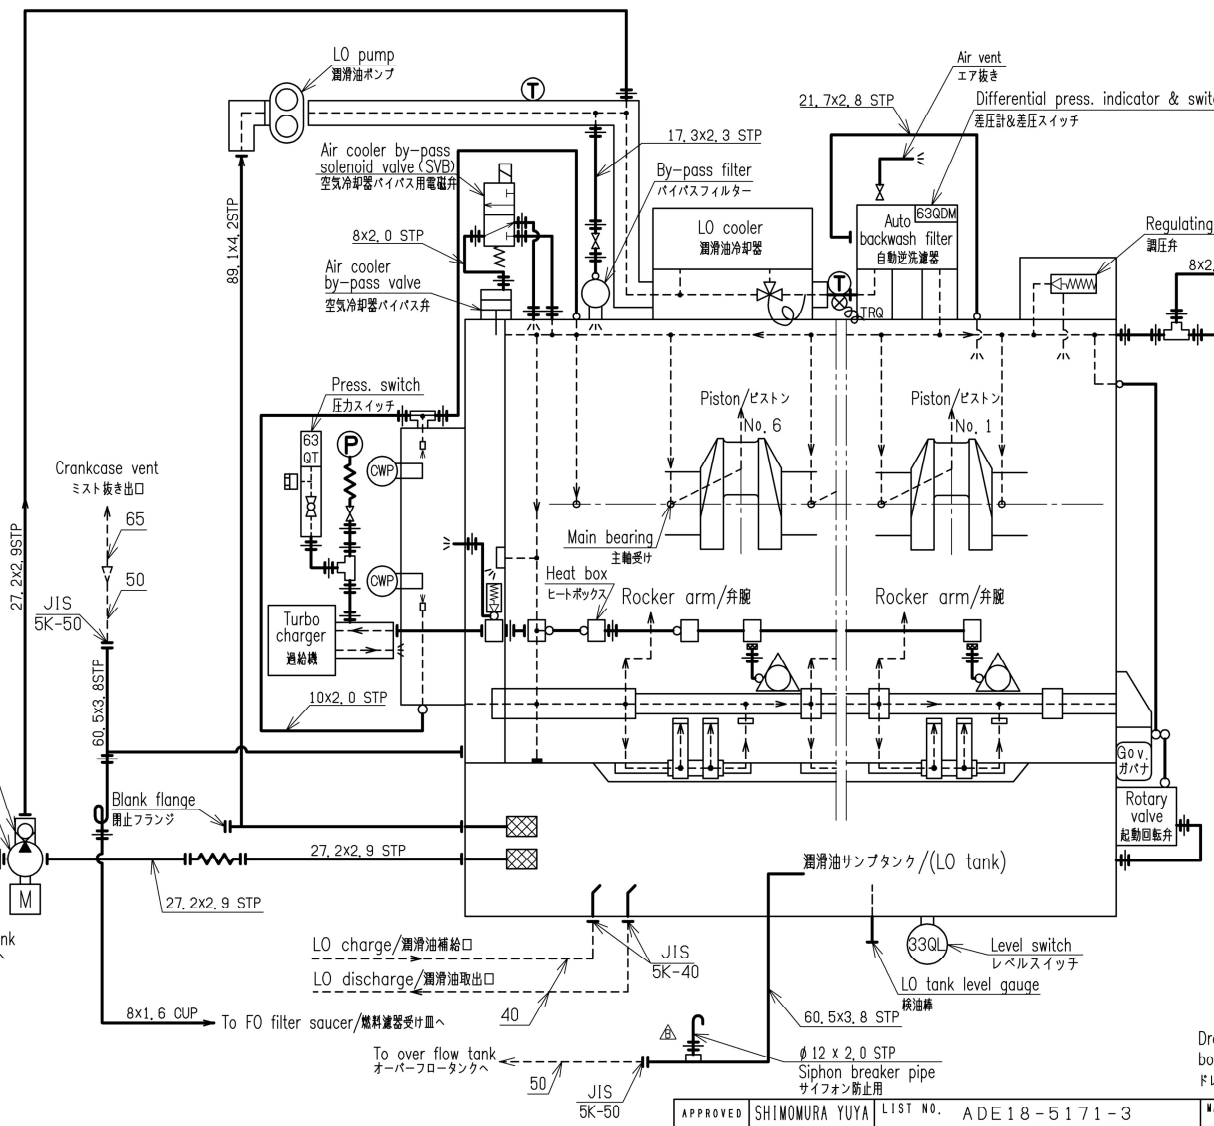

Drain pipes on engine are to be led to bottom of common bed by DAIHATSU.
ドレン配管、共通台板下部まで施工。

220105

⚠	(4-A) REV:SIPHON BREAKER PIPE		
⚠	FIRST DRAWING	2022/02/24	S.I

本図はダイハツディーゼル株式会社の所有物ですので、許可無く複写、転載及び第三者への開示を禁止します。
This drawing is the property of Daihatsu Diesel Mfg.Co.,Ltd. Reproduction,use or disclosure to third parties without express authority of Daihatsu is strictly forbidden.

APPROVED	SHIMOMURA YUYA	LIST NO.	ADE18-5171-3	MATERIAL APRV	GROUP 0
CHECKED		BEFORE		MASS.	QTY.
	IMANAKA SHUNSUKE	REF.		TYPE DE-18	
DRAWN	ONISHI MOTOE	DAIHATSU DIESEL MFG.CO.,LTD. OSAKA JAPAN		NAME L.O ケイトウズ::6DE-18	
DATE	2022/05/12			L.O. PIPING SYSTEM::6DE-18	
				PARTS NO. AQA10036417	B *

SCALE: −:− A3