


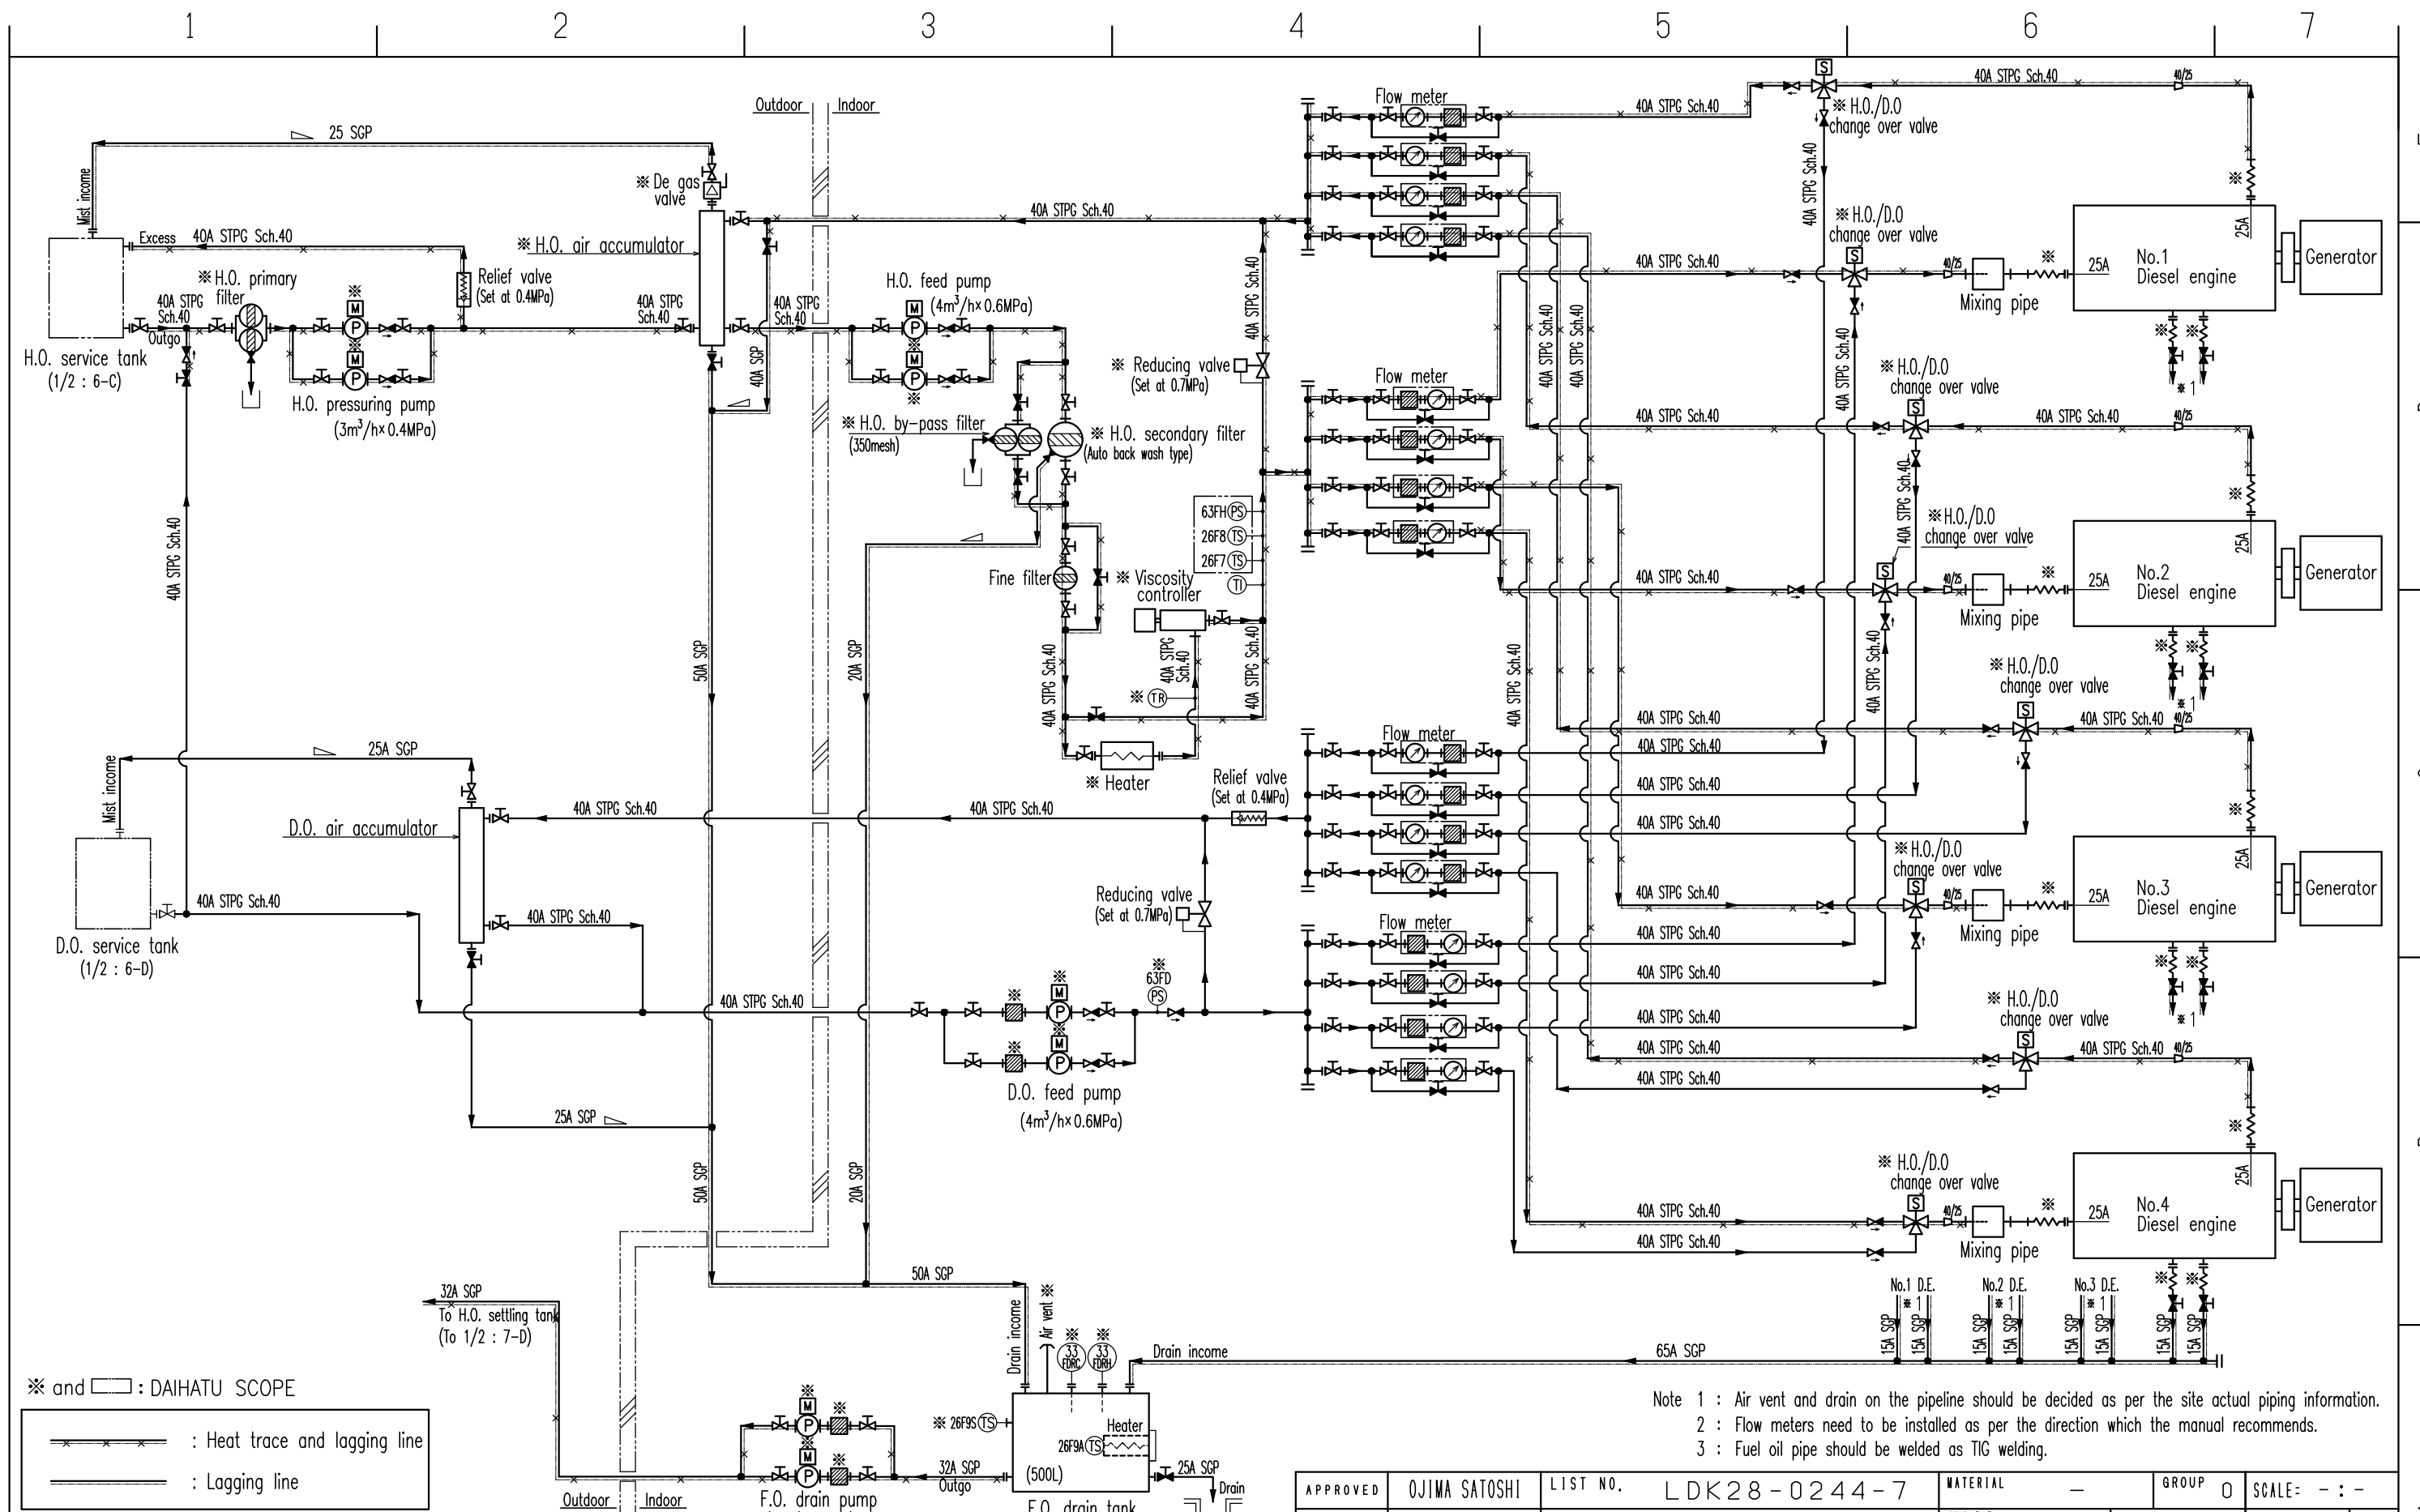

※ and : DAIHATSU SCOPE

: Heat trace and lagging line

: Lagging line

Note 1 : Air vent and drain on the pipeline should be decided as per the site actual piping information.
2 : Flow meters need to be installed as per the direction which the manual recommends.
3 : Fuel oil pipe should be welded as TIG welding.

	F I R S T D R A W I N G	B E . Z G . Z G	T . H
本図はダイハツインフィニアース株式会社の所有物ですので、 許可無く複写、転載及び第三者への開示を禁止します。		This drawing is the property of Daihatsu Infinearth Mfg.Co.,Ltd. Reproduction,use or disclosure to third parties without express authority of Daihatsu is strictly forbidden.	

APPROVED	OJIMA SATOSHI	LIST NO.	LDK28-0244-7	MATERIAL	—	GROUP	0	SCALE	— : —
CHECKED		BEFORE		MASS		QTY.			A3
	TOMODA SHINYA	REF.		TYPE	6DK-28			LEVEL	
	SAKAI TSUTOMU			NAME	PIPING DIAGRAM				
DRAWN	HORISAKI TAKASHI	DAIHATSU INFINEARTH MFG.CO.,LTD.			FUEL OIL SYSTEM				
DATE		OSAKA JAPAN			PARTS NO.	AQL10041654	A	2/2	