5mm x 20mm FUSE HOLDERS



SPECIFICATIONS:
Base & Cover: PA9T, UL94V-0
Clips: Brass, Tin Plate
Rated: 10Amps @500 V AC


CAT. NO. 4528
CAT. NO. 4518 - **Cover**
CAT. NO. 4528TR (Tape & Reel)
Tape & Reel Spec's: 1.732 (44.0) Wide; .630 (16.0) pitch; 400 pieces per reel


SMT

- Designed for automated assembly processing
- Reflow solder compatible
- Low profile, space saving design
- Flame Retardant
- Not UL rated

AVAILABLE ON TAPE AND REEL


Mounting Detail






SLIM LINE



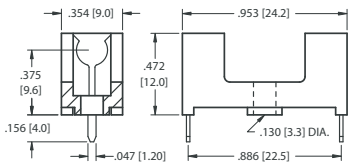

- Optional cover with window protects and insulates fuse
- Flame Retardant
- Not UL rated

Mounting Detail




CAT. NO. 4628 - **Holder**
CAT. NO. 4628C - **Cover only** (with window)

SPECIFICATIONS
Base & Cover: Nylon, 6/6 UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


LOW PROFILE





- Low profile, space saving design
- Optional cover protects and insulates fuse
- Flame Retardant
- Not UL rated

Mounting Detail




CAT. NO. 4527 - **Holder**
CAT. NO. 4527C - **Cover only**

SPECIFICATIONS
Base & Cover: Nylon, 6/6 UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


FULLY INSULATED



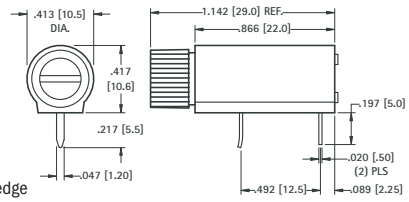

- Supplied unassembled
- Shock resistant
- Fuse can be accessed from board edge
- Fuse is completely enclosed, protecting use from shorting and breaking
- Not UL rated

Mounting Detail




CAT. NO. 4525

SPECIFICATIONS
Base: PBT
Contacts: Brass, Tin Plate
Rated: 10 Amps @ 250V AC


PC SNAP-IN





- Snap-in design for wave soldering
- Flame Retardant
- Optional cover protects and insulates fuse - Cat. No. 3527C

Mounting Detail



CAT. NO. 3527 - **Holder**

SPECIFICATIONS
Base: G10, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 6.3 Amps @ 250V AC


3AG FUSE HOLDERS

TERMINATION LUGS CAN BE USED WITH WIRES OR PC MOUNT


SPECIFICATIONS
Base: GPO-3, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 15 Amps @ 500V AC

PRESS-FIT, IDEAL FOR WAVE SOLDERING



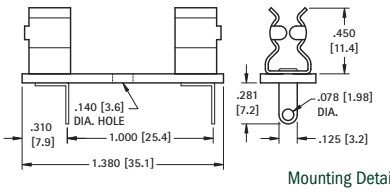


Mounting Detail




CAT. NO. 3526
Optional cover available - Cat. No. 4245C







Mounting Detail



CAT. NO. 4245
Optional cover available - Cat. No. 4245C


SNAP-IN DESIGN ASSURES STABILITY DURING WAVE SOLDERING





SPECIFICATIONS
Base: G10, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 15 Amps @ 500V AC


Mounting Detail



CAT. NO. 4250
Optional cover available - Cat. No. 4245C

MOLDED CASE





SPECIFICATIONS
Base: LCP, UL Rated 94V-0
Clips: Brass - Nickel Plated
UL Rated: 15 Amps @ 250 V AC

CAT. NO. 3523
Optional cover available - Cat. No. 4245C

Mounting Hole: .144 (3.7) Dia.

Tel (516) 328-7500 • Fax (516) 328-1080
(800) 221-5510 • kec@keyelco.com
KEYSTONE
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
55 S. Denton Avenue, New Hyde Park, NY 11040