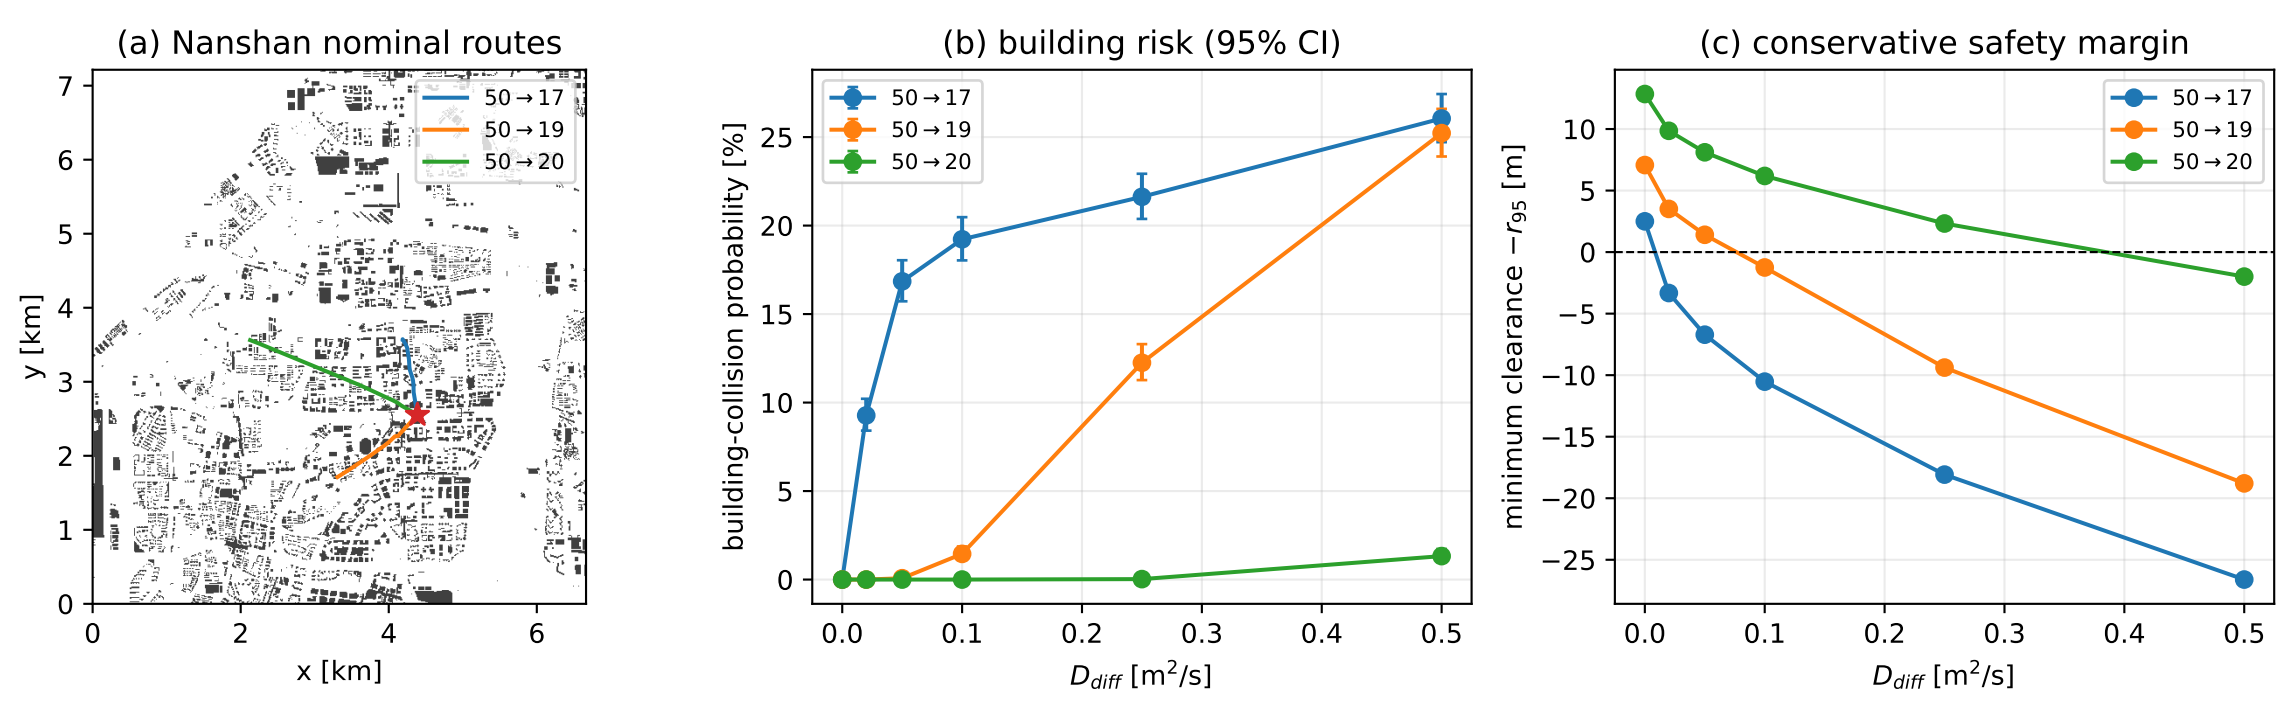
(a) Nanshan nominal routes
50 → 17
50 → 19
50 → 20
y [km]
x [km]
(b) building risk (95% CI)
building-collision probability [%]
D_{diff} [m²/s]
(c) conservative safety margin
minimum clearance $-r_{95}$ [m]
D_{diff} [m²/s]