








TODO

автоген
блокинг-генератор
бейзфид генератор (качер?)

AAUDIO_NRST
AUDIO_BOOT
SPI2
X2 X3 - POWER PINS
VCC+
VCC- - to +/-12v
48v delivery check
audio nrst & boot
SPI2 unrouted & not connected




WATCH FOR NUCLEO TESTPOINTS ON MORPHO CONNECTOR!

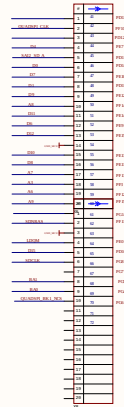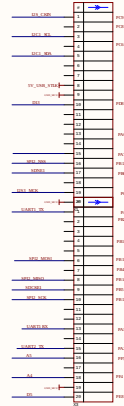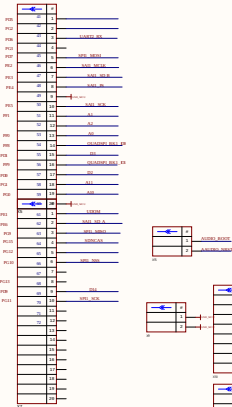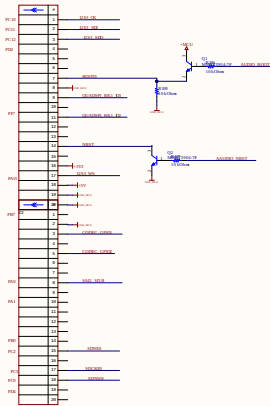



DNP COMPONENTS




FILTER HEADER





INPUT jacks

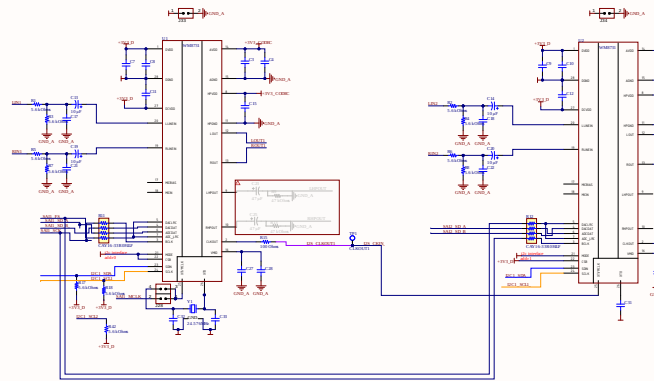

CODEC HEADER

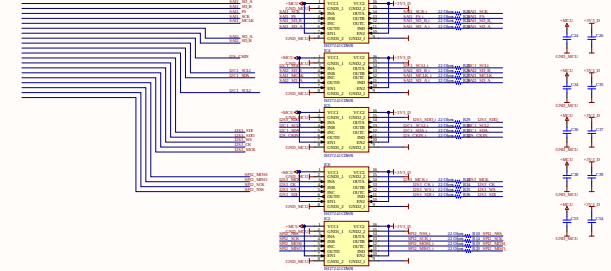

OUTPUT jacks






MEMORY

FLASH/PSRAM



POWER

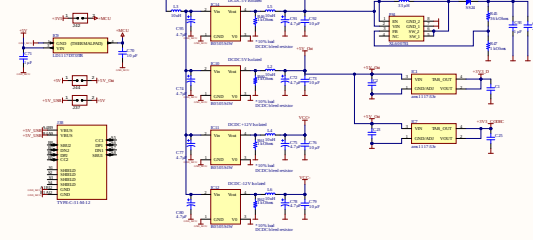

Shure SM57 - -56dBV/Pa
60dB SPL -> normal speech
94dB SPL = 1Pa -> max vol

----- my limits -----
120 dB SPL - loudest (mic inside a drum)
20 dB SPL - quietest (ticking watch)




I narrow that range to 60..110dB for quiet mics and 20..80dB SPL for hot mics

4.9V RMS is my ceiling for the +/-12V supply rails

SM78: 60-94=-34dBV (rel to 1Pa) + (-56dBV) = -92dBV = 25uV RMS
120-94=+26 = +10 = 3.2V
<good preamp EIN - 0.1uV 128dBu>
<average preamp EIN - 0.25uV 120dBu>

Hot condenser: 20/94

Mic type	Typical sensitivity	Output at 94 dB SPL	Output at max SPL (close-miked)
Hot condenser (e.g., some LDCs)	-28 dBV/Pa (40 mV/Pa)	40 mV	-1.0 V RMS at 120 dB SPL, shout
Typical condenser (SM88)	-45 dBV/Pa (5.6 mV/Pa)	5.6 mV	-0.45 V RMS at 130 dB SPL, intense
Quiet dynamic (3A7B)	-59 dBV/Pa (1.1 mV/Pa)	1.1 mV	-0.99 V RMS at 130 dB SPL
Very quiet passive ribbon	-65 dBV/Pa (0.56 mV/Pa)	0.56 mV	-0.045 V RMS at 130 dB SPL

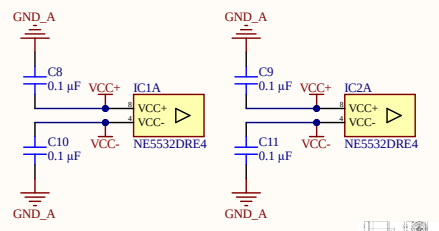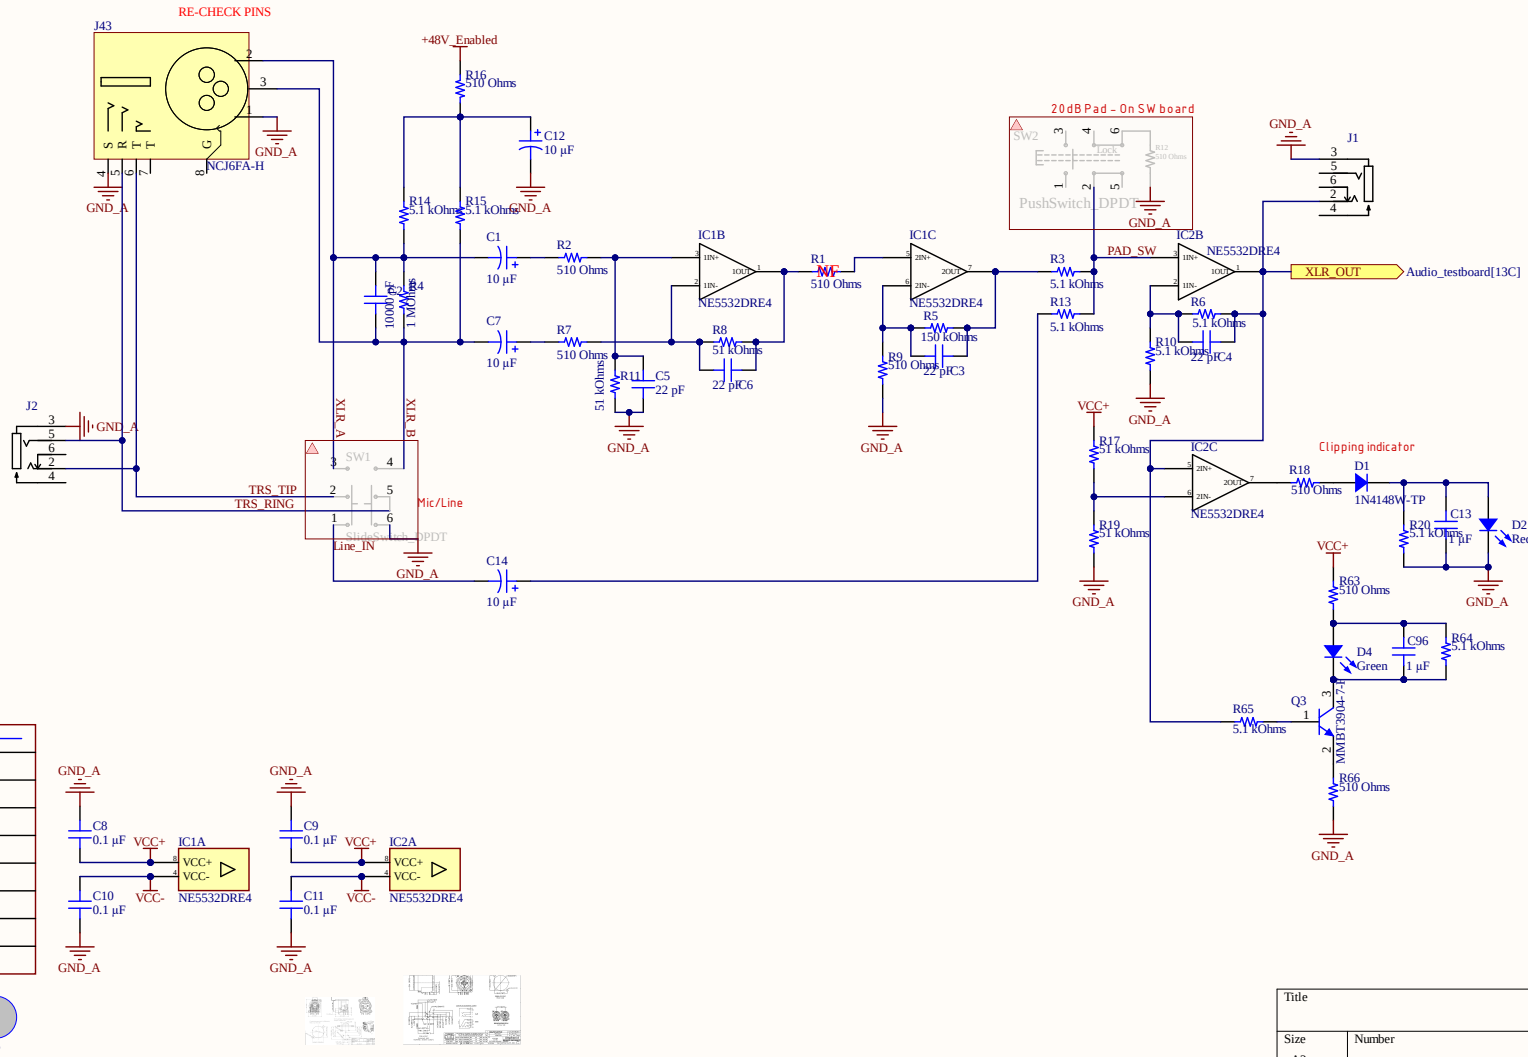

Title		
Size	Number	Revision
A3		
Date:	9.01.2026	Sheet of
File:	C:\Users\XLR\SchDoc	Drawn By:

