台技工業設備股份有限公司 TANGTECK EQUIPMENT INC.


台灣桃園縣大園鄉水源路 913 號

No.913, Shueiyuan Rd. Dayuan Township, Taoyuan County, Taiwan R.O.C.

TEL:886-3-3867575 FAX:886-3-3866955 http://www.tangteck.com.tw

DRYING FURNACE FOR PASTE PRINTING

(乾燥爐)

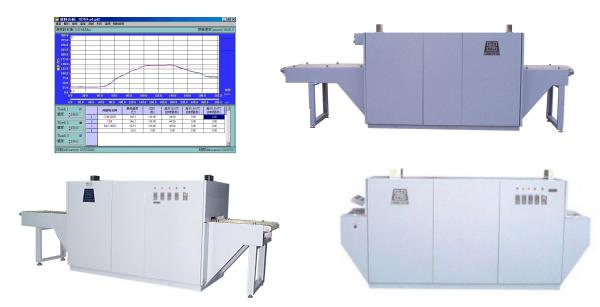

Model	DRY-18-		DRY-24	
Specification	S3H	S4H	S3H	S4H
Overall Dimension (mm) (approx.)	3570(L) 900(W) 1354(H)	3810(L) 900(W) 1354(H)	3570(L) 1050(W) 1354(H)	3810(L) 1050(W) 1354(H)
Power Rated (Input:220V,3P,60Hz or 380 V,3P,4Wires)	6.5 KW	8.5 KW	9 KW	12 KW
Number of Heating Zone	3	4	3	4
Width of mesh belt (mm)	450		600	
Max. Process Height	25		25	
Max. Speed of Transportation	120(cm/min)		120(cm/min)	
Temperature Range Of Set point	Ambient - 450°C		Ambient - 450°C	

- Personal computer is options.
- 10 · 24: Furnished with only mesh belt transportation.
- Specifications are subject to change without notice.