

## BSS: Soundweb London

This module controls an "Source Matrix" object in a Soundweb London program.




### GENERAL INFORMATION

<b>SIMPLWINDOWS NAME:</b>	BSS Soundweb London Source Matrix v3
<b>CATEGORY:</b>	Device Interface
<b>VERSION:</b>	V3.0
<b>SUMMARY:</b>	This module controls an "Source Matrix" object in a Soundweb London program.
<b>GENERAL NOTES:</b>	<p>Each object in a Soundweb London program is given an object number. You have to specify the object id of the "Source Matrix" object that is to be controlled. (objectID parameter)</p> <p>The TX and RX of this module should be connected to a "BSS Soundweb London Node.umc" module.</p> <p>This "Node" module needs to have it's "Node" parameter set to the node of the Soundweb London device to control.</p> <p>When pulsing the "subscribe" input, all functions (called state variables) of this object will be subscribed to.</p> <p>From that point on, the Soundweb London will automatically report any change of these state variables made on the Soundweb London device itself. This module will then take this report and show it on the feedback outputs.</p> <p>At this moment, a change made by Crestron does not generate a feedback update. Pulsing the "subscribe" input will generate a feedback report also when already subscribed.</p>
<b>CRESTRON HARDWARE REQUIRED:</b>	X-series or preferable 2-series
<b>SETUP OF CRESTRON HARDWARE:</b>	<p>The demo program was created on a PRO2 with TPS-4000</p> <p>The Soundweb London is to be connected on a com port with a standard crossed cable and the following settings:</p> <p>115200, 8, 1, N</p> <p>Or to use TCP/IP: Port 1023</p>
<b>VENDOR FIRMWARE:</b>	1.04.02
<b>VENDOR SETUP:</b>	Soundweb London Blu-80



## CABLE DIAGRAM:

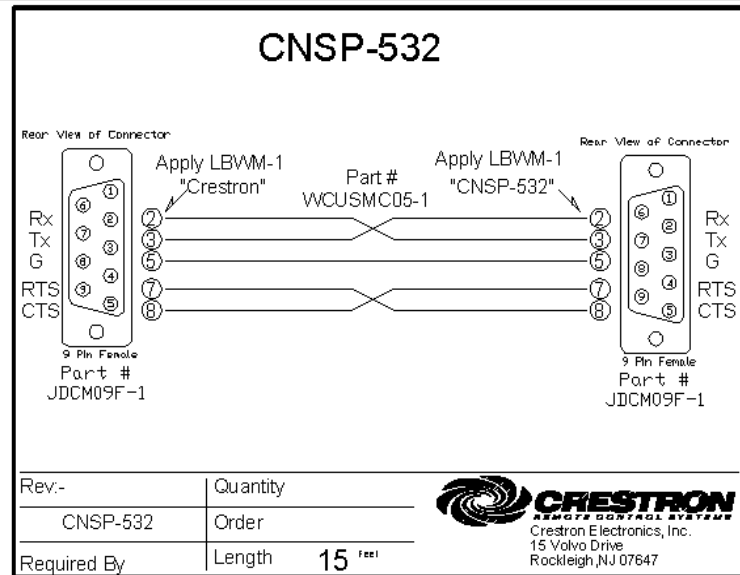

## CONTROL:

inputForOutputX	A	set the input for output X. 1d to 96d
subscribe	D	Subscribe to the number of outputs defined by the "numberOfOutputs" parameter. For example: when the parameter is set to "6d", pulsing the subscribe in put will subscribe to the first 6 outputs.
unsubscribe	D	Unsubscribe to the number of outputs defined by the "numberOfOutputs" parameter. For example: when the parameter is set to "6d", pulsing the unsubscribe in put will unsubscribe to the first 6 outputs.
rx	S	connected to the "modulesRx" of the correct "BSS Soundweb London Node.umc" module

## FEEDBACK:

inputForOutputX_fb	A	input feedback for output X
--------------------	---	-----------------------------



tx	S	connected to the "modulesTx" of the correct "BSS Soundweb London Node.umc" module

## PARAMETERS:

objectID	d	specifies which objectID is to be controlled. (3 bytes, for example: "\x00\x00\x01") (get this information from the BSS programmer)
numberOfOutputs	d	Set the highest used output. When you use for example only "inputForOutput4" and "inputForOutput15", this parameter needs to be set to "15d"

## TESTING:

OPS USED FOR TESTING:	3.155.1240
COMPILER USED FOR TESTING:	2.10.24
SAMPLE PROGRAM:	BSS Soundweb London v3 Demo Program
REVISION HISTORY:	V1.0 Creation V3 – BSS made changes to a number of modules.