

# SO 3.0

## SETTING SHEET Ver.01

DRIVER

DATE

## CIRCUIT

OINDOOR OOUTDOOR

ODIRT OASTROTURF OCARPET OGGLASS OWOOD


OWET ODRY ODUSTY OSMOOTH OBUMPY

OHARD PACKED OCLAY OBLUE GROOVE O



OLOW TRACTION OMEDIUM TRACTION OHIGH TRACTION

## FRONT


Bulkhead  
 Z2-002BTA  
 Z2-002BG

◆CAMBER  °◆TOE  IN  OUT °◆RIDE HEIGHT  mm

Wide ONarrow  
 Plastic  
 Aluminum  
  
 Graphite  
 Standard




O+1 ↑  Plastic  
 Aluminum  
 Steel

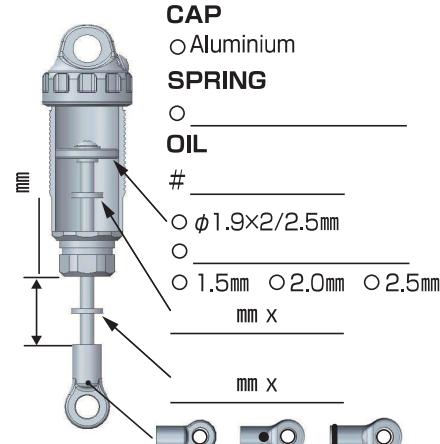


## REAR

Gearbox cover  
 Z2-302CTA  
 Z2-302CG

◆CAMBER  °◆RIDE HEIGHT  mm


Gearbox support  
 Z2-300RG31A  
 Z2-300RG  
  
 Plastic  
 Aluminium  
  
 OLS  
 OS3  
  
 Graphite  
 Standard



Suspension mount  
 Standard (S01.0/2.0/3.0)  
 High mount (Z2-300RFHA/Z2-300RRHA)


005 005

0 1 0 1

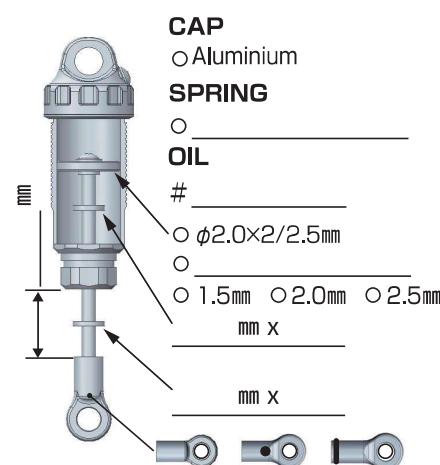

## DRIVE

OLD  
 OLCA  
 OLCG




MOTOR  Rotor  mm

GEAR  Spur T / Pinion T : 2.6

BATTERY

ESC

SETTING

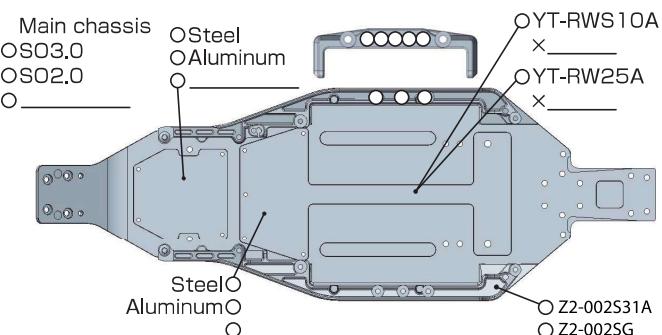

## TIRES

FRONT  TIRE

INSERTS

WHEELS



## REAR

TIRE

INSERTS

WHEELS

## OTHER



Z2-DTM31WA (Aero Hi-clearance 7')  
 Z2-CAL2WA (LMR27)

## COMMENT