Panasonic
ideas for life

NCR18650B Standard data

March, 2012

Energy Company of Panasonic Group


Lithium-Ion Battery Business Unit

High Capacity type

TENTATIVE

Cell Type NCR18650B

Specification

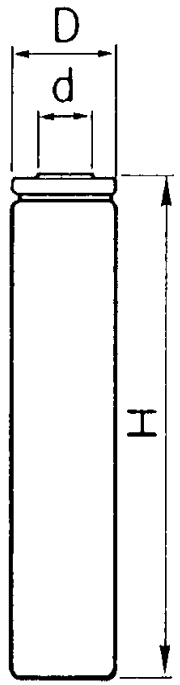

Dimensions(Typ.) of Bare Cell	H	64.93mm
	D	18.2mm
	d	7.9 mm

Discharged State after Assembling

Rated Capacity *at 20deg.C		Min.3200mAh
Nominal Capacity *at 25deg.C		Min.3250mAh
		Typ.3350mAh
Nominal Voltage		3.6V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std.1625mA
Charging Time		4.0hrs.
Ambient Temperature	Charge	10～+45℃
	Discharge	-20～+60℃
	Storage	-20～+50℃
Weight (Max.)		47.5g
Dimensions (Max.)*	(D)	18.25mm *without tube
		18.50mm *with tube
	(H)	65.10mm *without tube
		65.30mm *with tube
Volumetric Energy Density		676Wh/l
Gravimetric Energy Density		243Wh/kg


*Maximum size without tube

Panasonic ideas for life

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

TENTATIVE


Discharge Rate Characteristics for NCR18650B

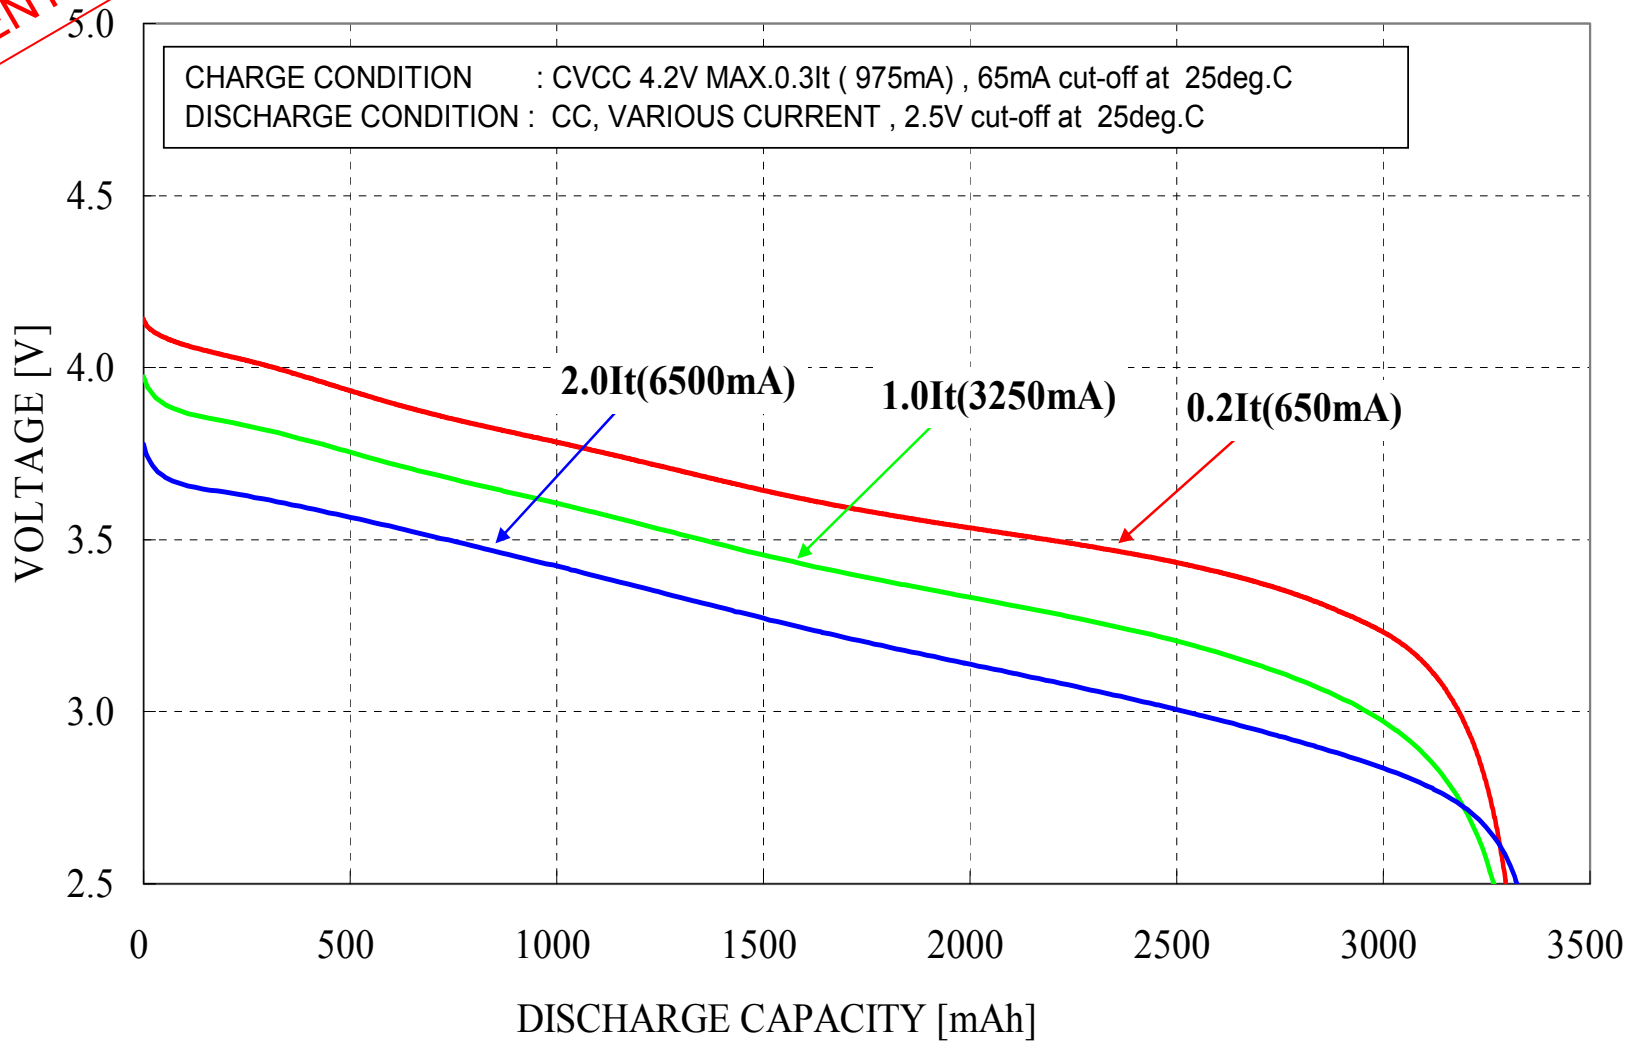

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

TENTATIVE


Discharge Temperature Characteristics for NCR18650B

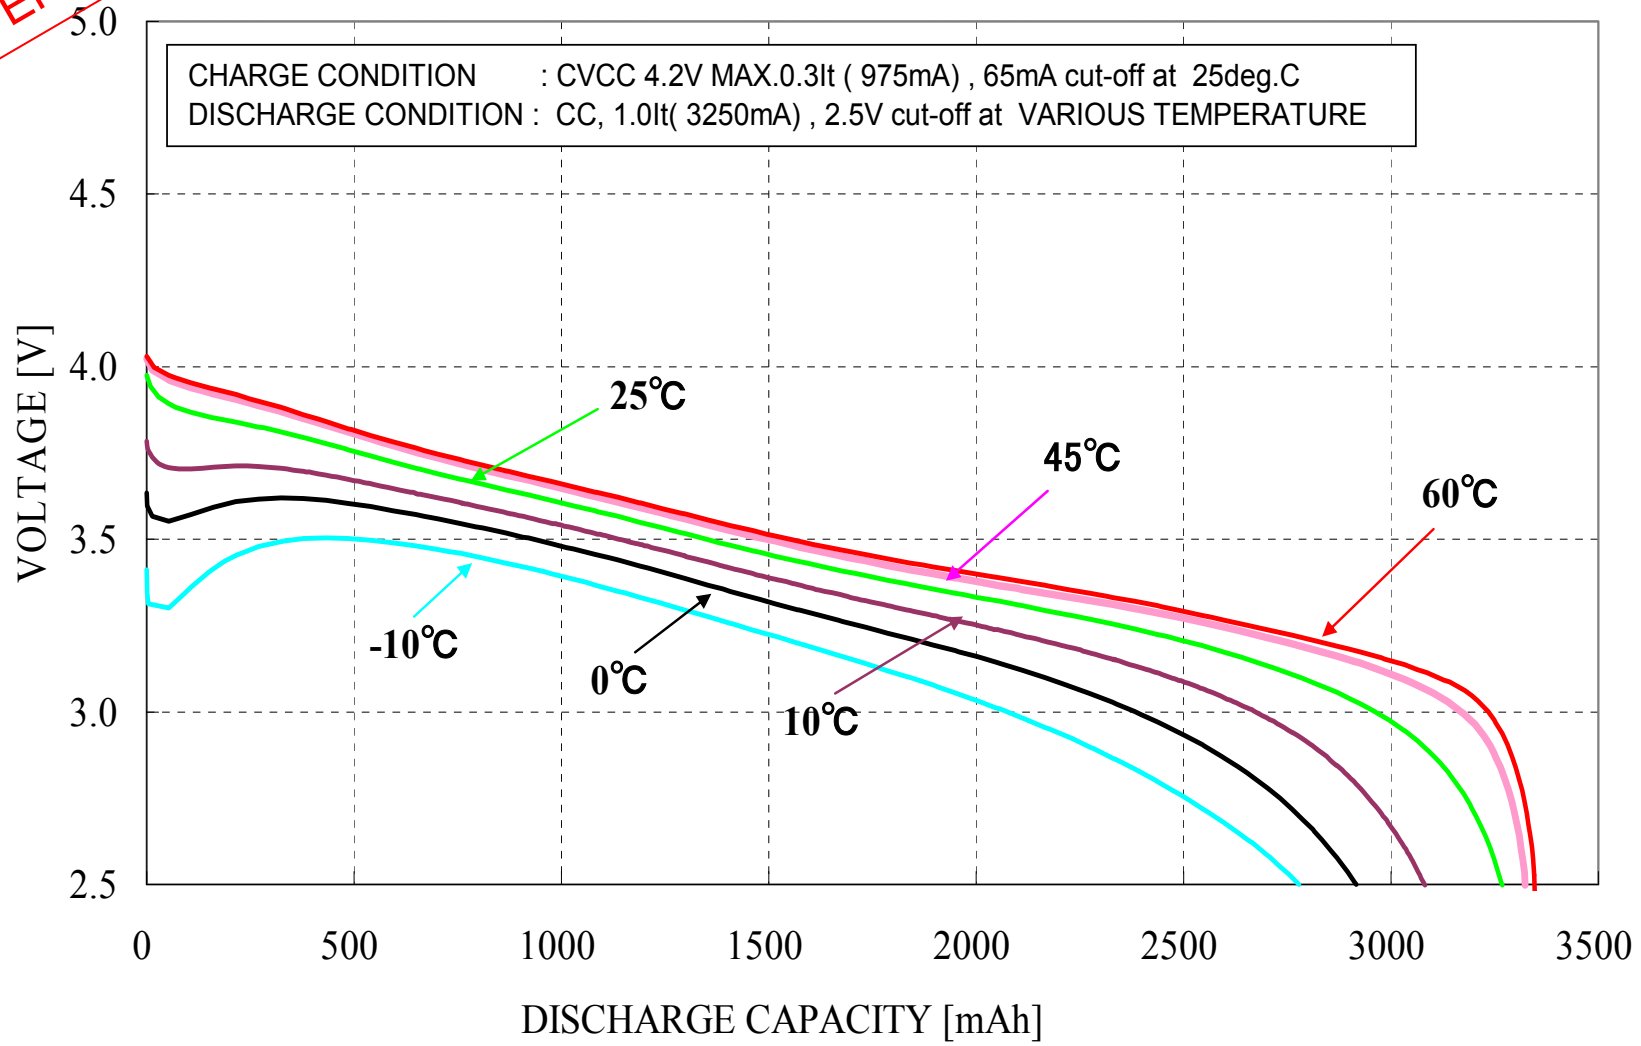

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

TENTATIVE

Charge Characteristics for NCR18650B

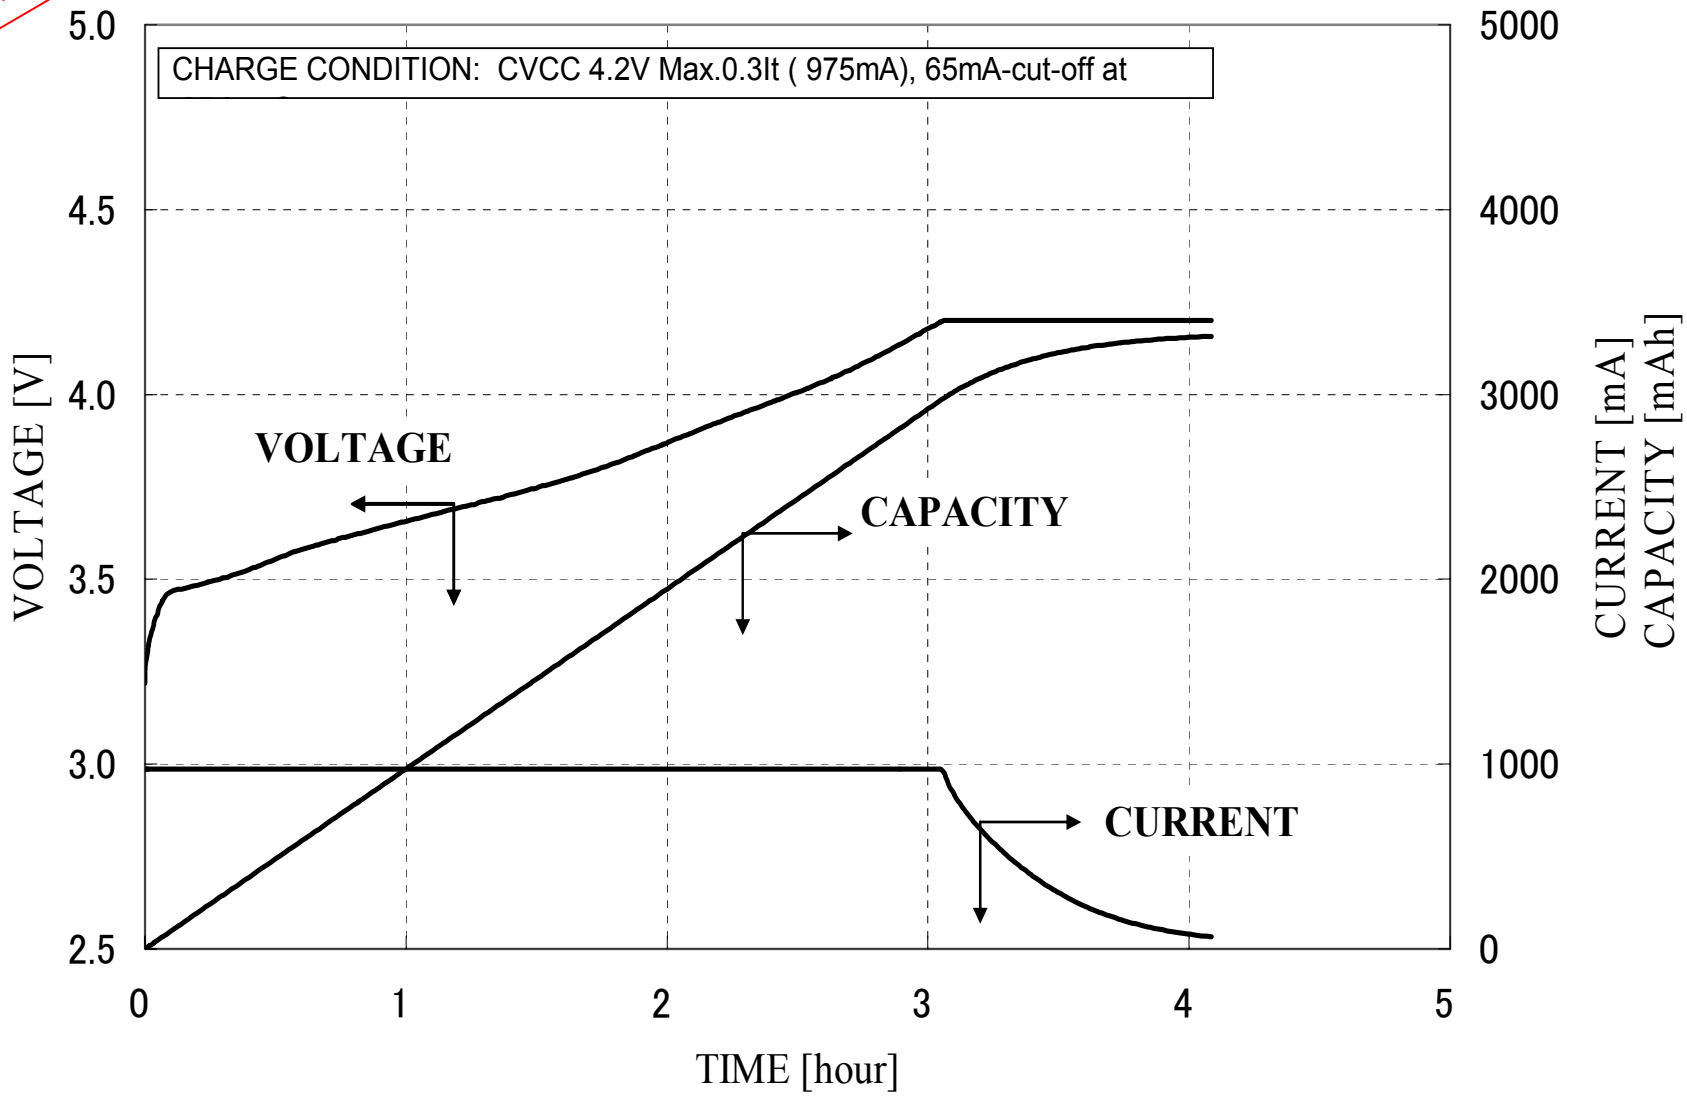


Panasonic ideas for life

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

TENTATIVE

Cycle Characteristics for NCR18650B

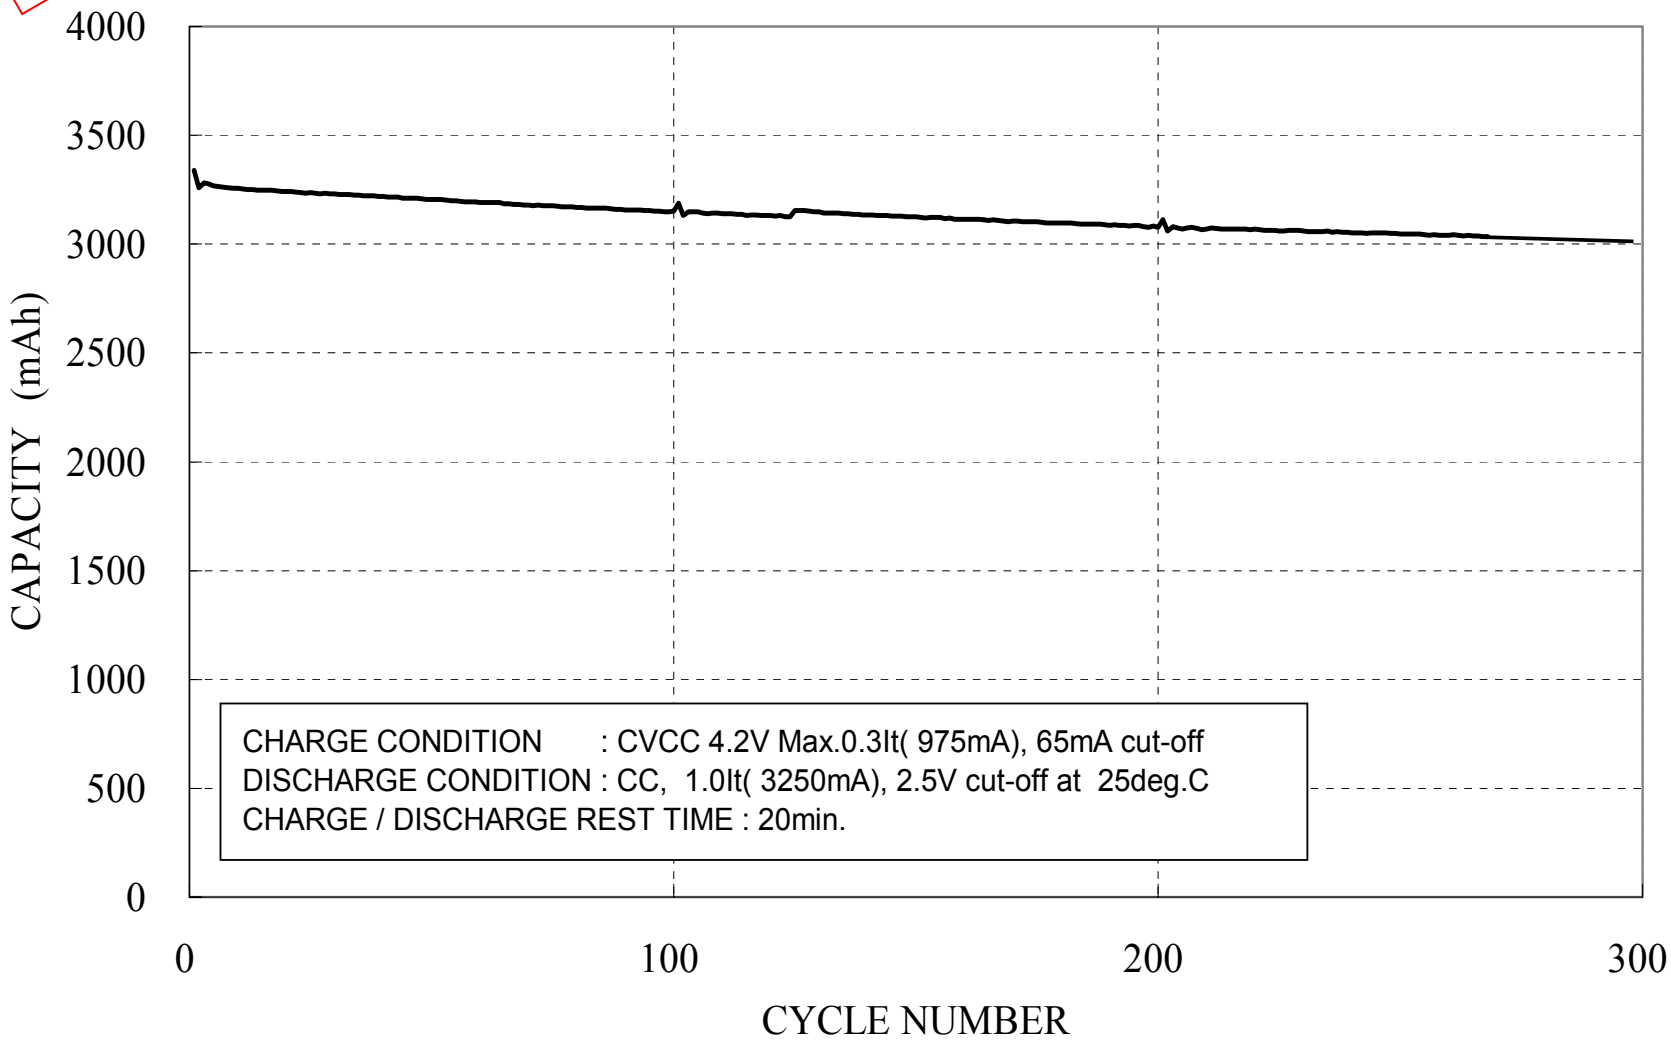

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

Panasonic

ideas for life