REV	C/N	REVISION RECORD	DATE	DRAWN BY:	CHECKED BY:	APPROVED BY:
0	EDMS	INITIAL RELEASE	05.16.2022	L.HEAD	EDMS	EDMS

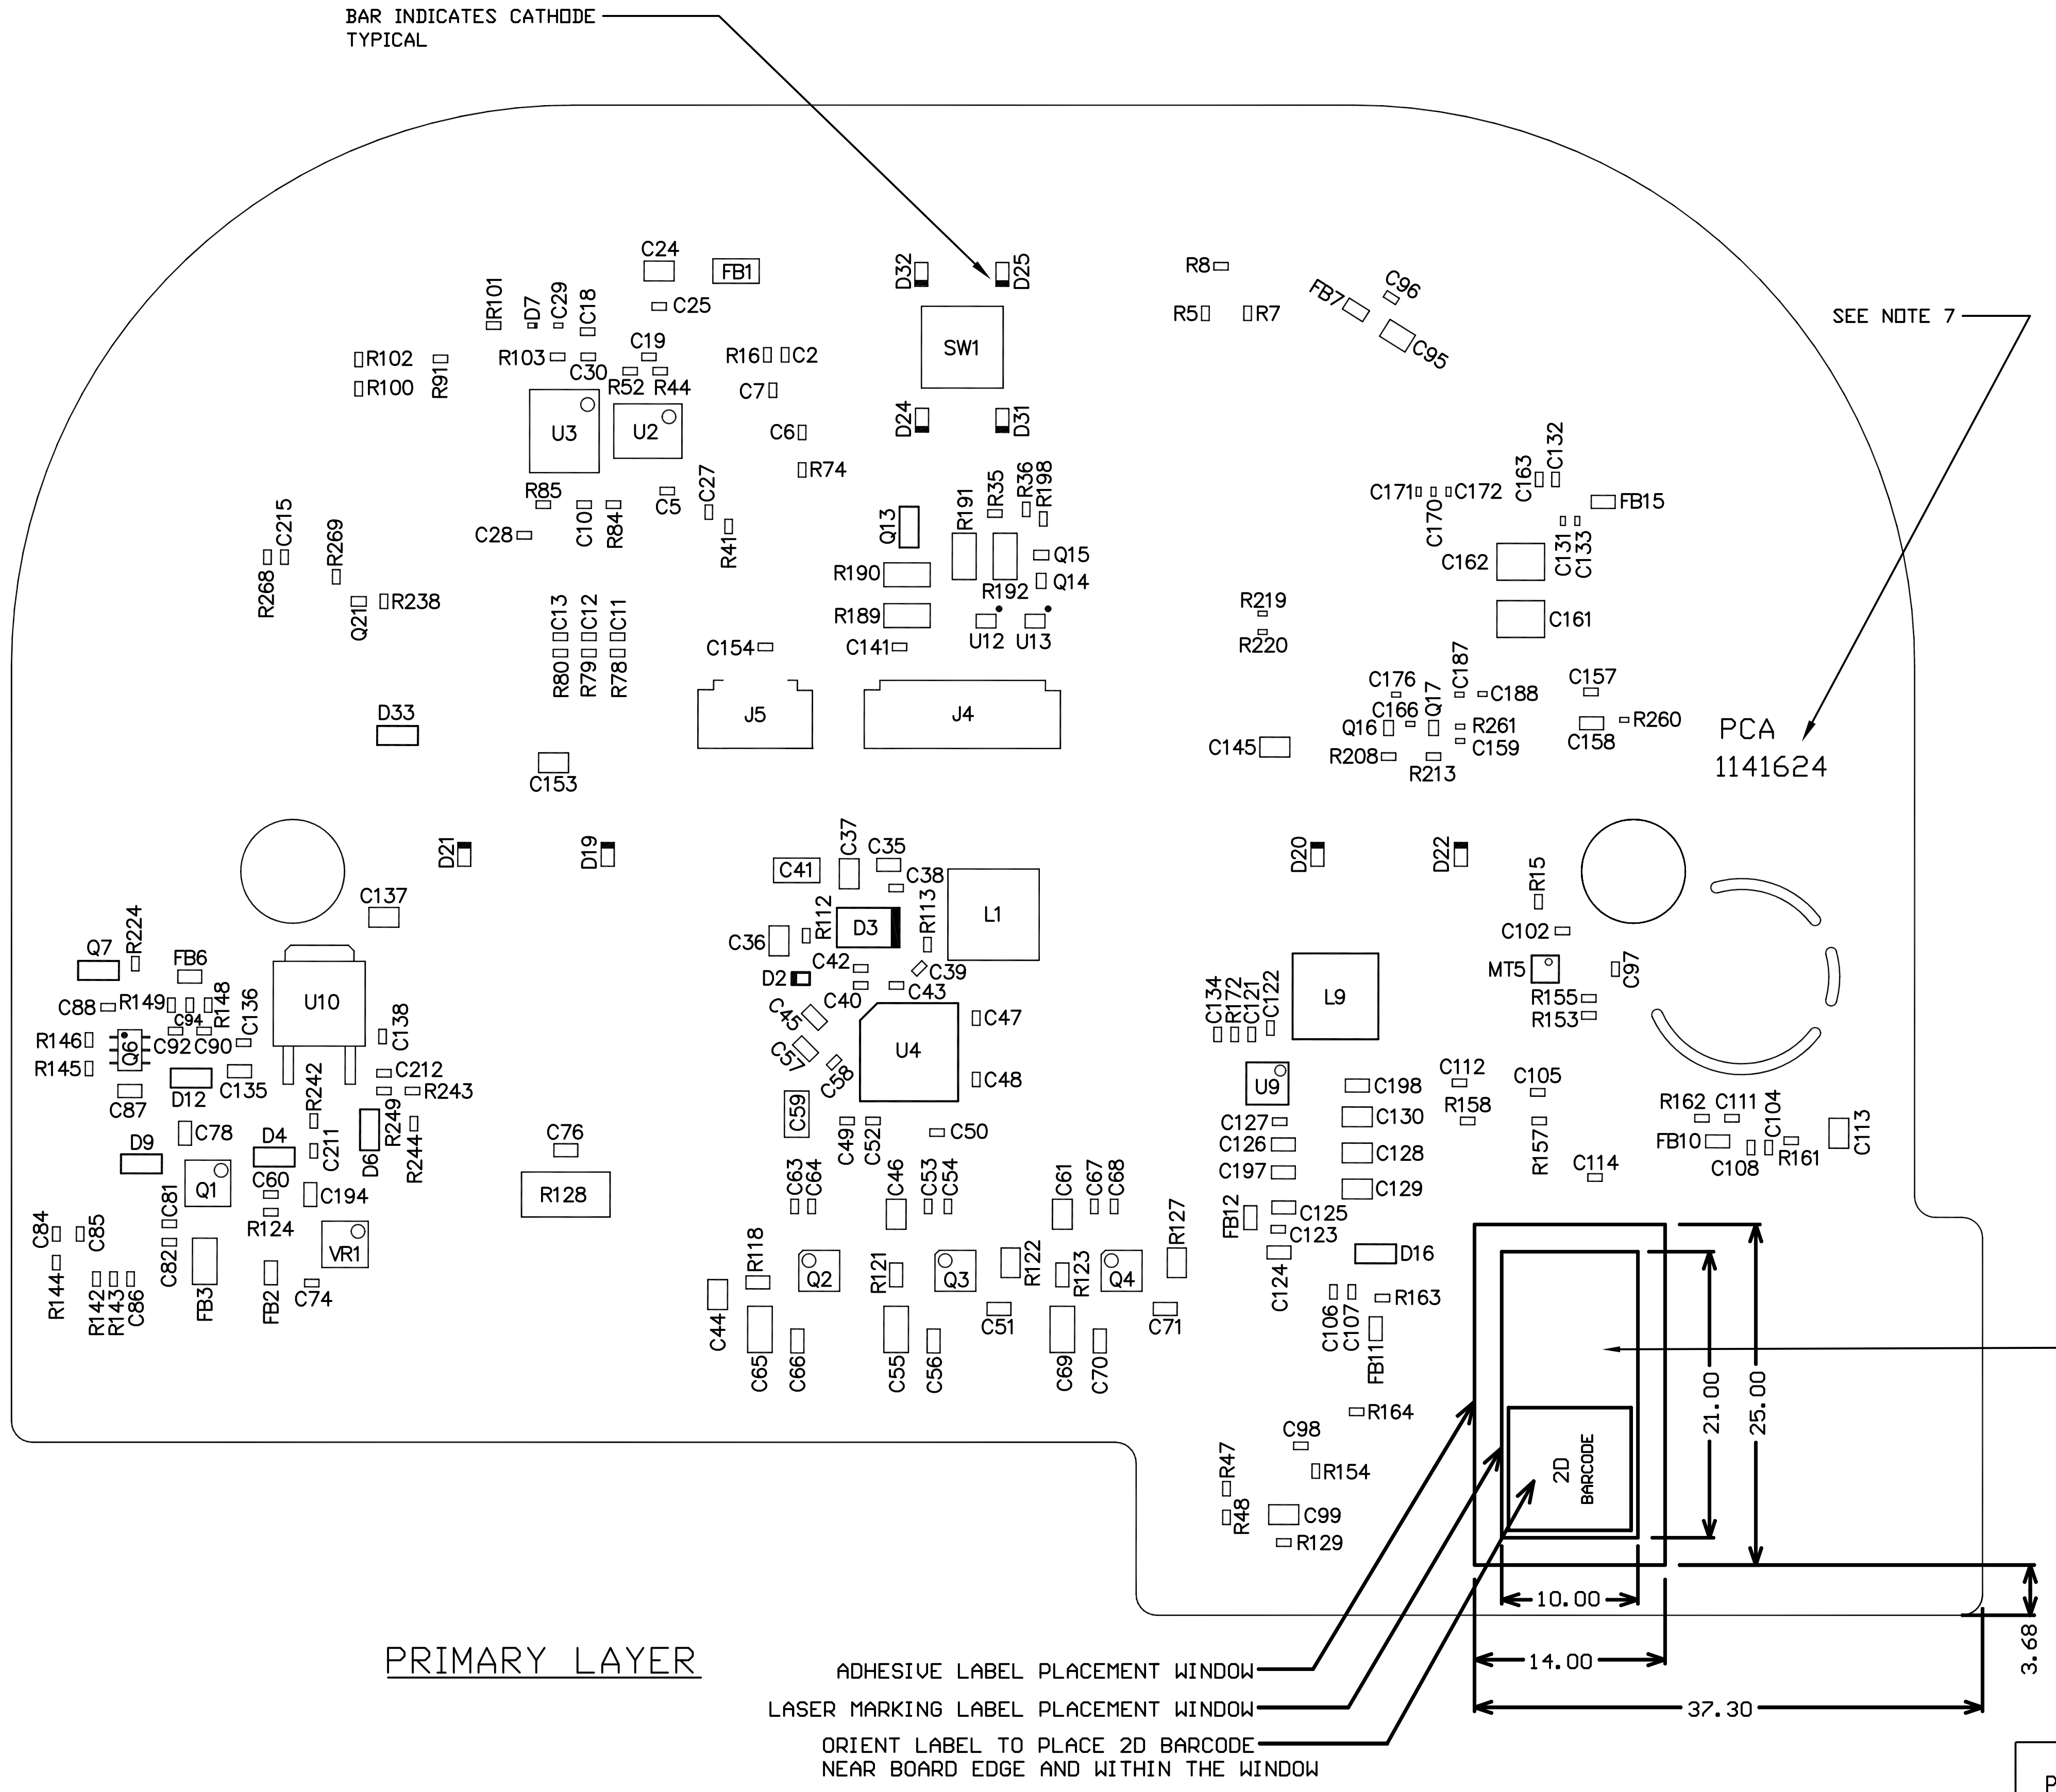
BAR INDICATES CATHODE
TYPICAL

SEE NOTE 7

PCA
1141624

SEE NOTE 3

PRIMARY LAYER

ADHESIVE LABEL PLACEMENT WINDOW

LASER MARKING LABEL PLACEMENT WINDOW

ORIENT LABEL TO PLACE 2D BARCODE
NEAR BOARD EDGE AND WITHIN THE WINDOW

NOTES:

1. THE PRINTED CIRCUIT ASSEMBLY MUST BE RoHS COMPLIANT PER THE LATEST DIRECTIVE ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT.

2. ASSEMBLY WORKMANSHIP AND SOLDERING PER IPC STANDARD ANSI/IPC-A-610, (CURRENT REVISION) CLASS 2, ACCEPTABILITY OF ELECTRONIC ASSEMBLIES.
EXCEPTIONS:
A. LEADS OF BT1 ARE ALLOWED TO PROTRUDE MORE THAN 2.5MM. LEAD TRIMMING IS NOT REQUIRED.
B. IT IS NOT REQUIRED FOR THE THROUGH-HOLE PINS OF J2 TO BE VISIBLE AFTER SOLDERING. PINS OF J2 SHALL HAVE A MINIMUM 50% SOLDER FILL WITHIN THE BARREL MEASURED FROM THE SECONDARY SIDE.

3. PLACE LABEL OR LASER MARKING IN LOCATION AS NOTED.
A. LABEL SIZE : MAXIMUM 10mm x 21mm FOR ADHESIVE LABEL OR LASER MARKING.
B. BARCODE SIZE: MINIMUM 5mm x 5mm FOR ADHESIVE LABEL OR 6mm x 6mm FOR LASER MARKING.

C. FORMAT: 2D MATRIX STRING AS FOLLOWS;

CHARACTERS 0-6:	7-DIGIT RI PART NUMBER
CHARACTER 7:	PLANT/VENDOR IDENTIFIER(SERIAL NUMBER FIRST CHARACTER)
CHARACTERS 8-16:	PCA SERIAL NUMBER(SERIAL NUMBER CHARACTERS 2 THROUGH 10)
CHARACTERS 17,18:	PCA REV NUMBER
CHARACTERS >=19:	VENDOR INFORMATION

D. HUMAN READABLE TEXT ON LABEL OR LASER MARKING MUST CONTAIN RI PART NUMBER, REV NUMBER, AND SERIAL NUMBER AT A MINIMUM, WITH THE PART NUMBER AND SERIAL NUMBER ON SEPARATE LINES. VENDOR MAY ALSO INCLUDE VENDOR-SPECIFIC DATA ON SEPARATE LINES AS NEEDED.
E. LABEL MATERIAL, INK & ADHESIVE ARE TO BE NON-CONDUCTIVE.
F. LABEL OR LASER MARKING TO BE TESTED & APPROVED BY PHILIPS/RESPIRONICS.

4. REFER TO COMPUTER BILL OF MATERIAL FOR PART NUMBERS & REFERENCES.

5. THIS DRAWING IS PART OF AN ASSEMBLY PACKAGE & MUST BE MAINTAINED AT THE SAME REVISION LEVEL.

6. THE FOLLOWING COMPONENTS MUST BE SECURELY ATTACHED TO THE PCB USING LOCTITE 3515, 3621, OR EQUIVALENT; C200-C203.

7. DO NOT REFERENCE NUMBER(IN SILKSCREEN) FOR IDENTIFYING PCA. FOR PCA NUMBER, REFERENCE LABEL OR LASER MARKINGS AS DEFINED IN NOTE 3. NUMBER IS NOT PRESENT ON ALL PCBs.

8. PROGRAM U1 USING XU1.

9. APPLY KAPTON TAPE(OR EQUIVALENT) WHERE INDICATED. COMPONENTS C140, C147, C148, C199, R110, R194, R195, R197 & R273 MUST BE COMPLETELY COVERED. TAPE SPECIFICATIONS: WIDTH- 1 INCH, THICKNESS- 2MIL, DIELECTRIC STRENGTH- 6.5kV MINIMUM, AND RoHS COMPLIANT.

BARE BOARD REVISION FOR THIS ASSEMBLY IS: PCB: 1141623 REV: 3

CONFIDENTIAL AND PROPRIETARY INFORMATION

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL AND PROPRIETARY BY RESPIRONICS. ALL DESIGN, MANUFACTURING, USE AND REPRODUCTION RIGHTS RELATED TO THIS INFORMATION, AND ALL SALES RIGHTS ASSOCIATED THEREWITH, ARE EXPRESSLY RESERVED BY AND TO RESPIRONICS. USE, REPRODUCTION OR DISTRIBUTION OF THIS INFORMATION, OR COMMUNICATION OF THIS INFORMATION TO OTHERS, IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RESPIRONICS.

PRODUCT LINE: PINNACLE
PROCESS: ASSEMBLY
DRN BY: L.HEAD 05.16.2022
CHK BY: EDMS EDMS
APPR BY: EDMS EDMS

RESPIRONICS

TITLE: PCA, MAIN, UBLOX R6001,WW
SIZE: D
DRAWING NO. A1153354
REV. 0
SCALE NA
PART NO. 1153354
SHEET 1 OF 3

REV	C/N	REVISION RECORD	DATE	DRAWN BY:	CHECKED BY:	APPROVED BY:
		SEE SHEET 1				

SEE NOTE 8

SOLDER SHIELD WIRE TO PAD

SOLDER SIGNAL WIRE TO PAD

NOT OPEN IN PASTE STENCIL(4plcs)

SEE NOTE 2A

SEE NOTE 6

SEE NOTE 6

SEE NOTE 6

SEE NOTE 2B

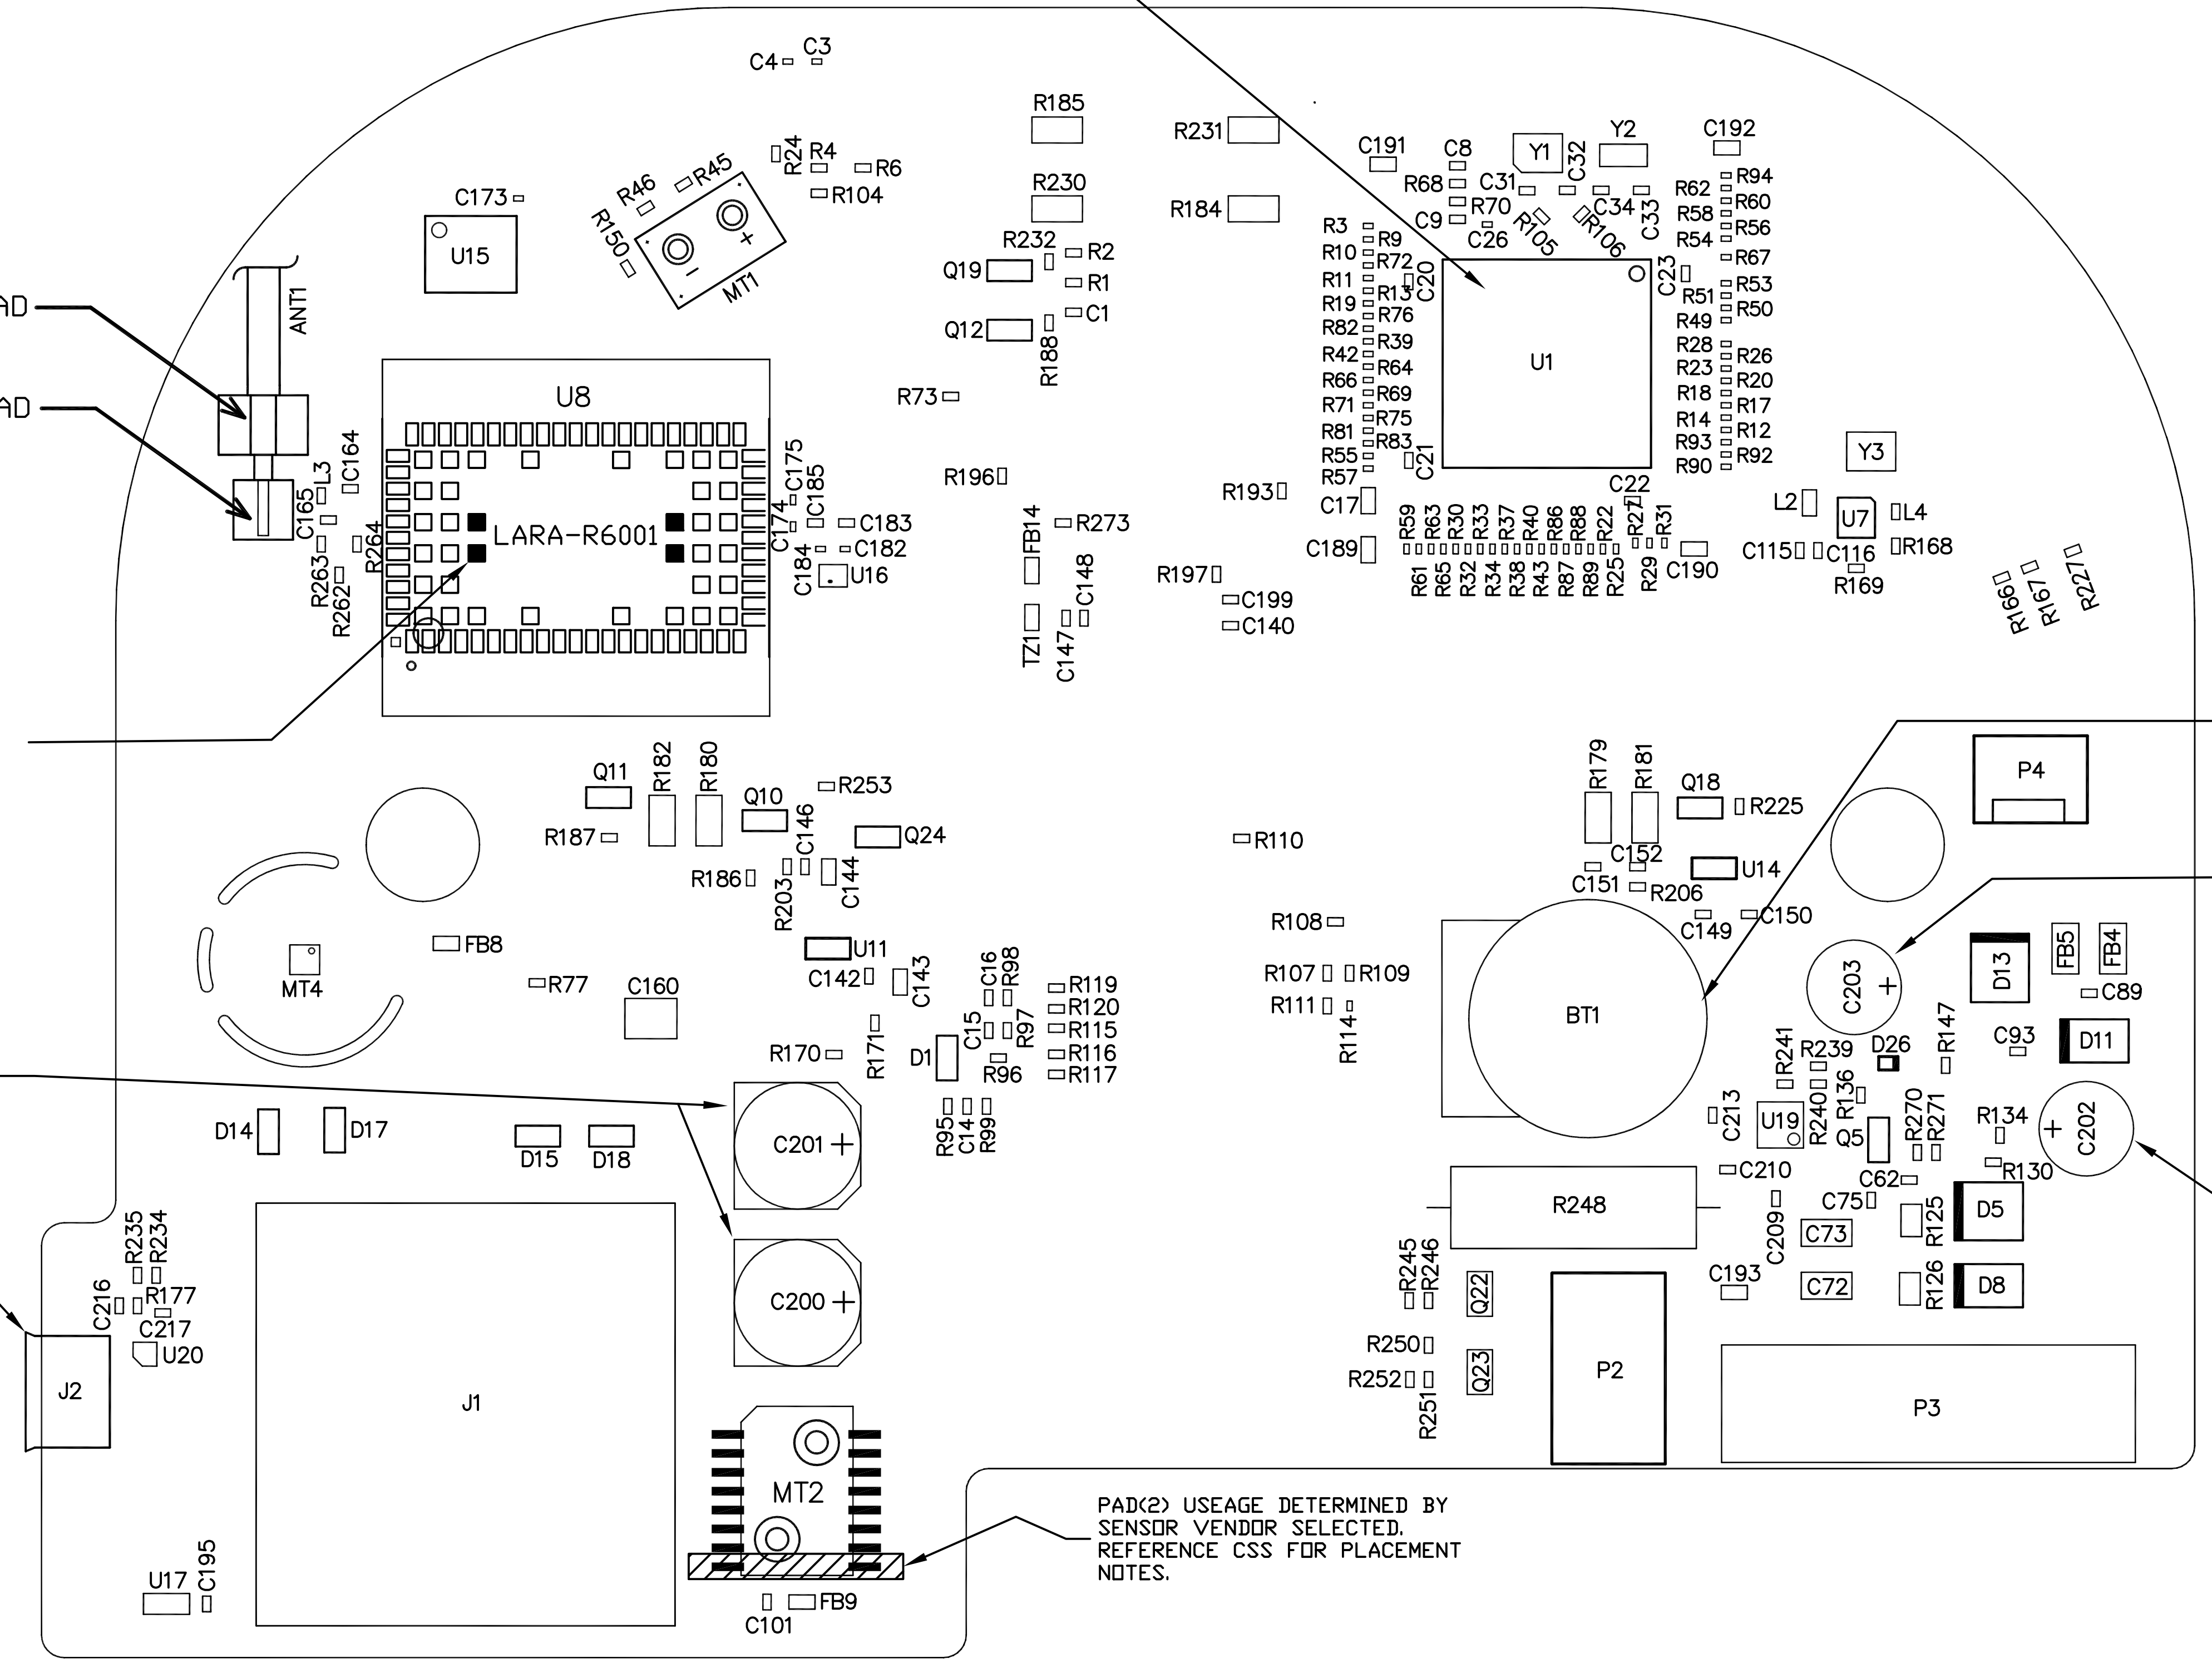

PAD(2) USEAGE DETERMINED BY SENSOR VENDOR SELECTED. REFERENCE CSS FOR PLACEMENT NOTES.

SECONDARY LAYER

CONFIDENTIAL AND PROPRIETARY INFORMATION

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL AND PROPRIETARY BY RESPIRONICS. ALL DESIGN, MANUFACTURING, USE AND REPRODUCTION RIGHTS RELATED TO THIS INFORMATION, AND ALL SALES RIGHTS ASSOCIATED THEREWITH, ARE EXPRESSLY RESERVED BY AND TO RESPIRONICS. USE, REPRODUCTION OR DISTRIBUTION OF THIS INFORMATION, OR COMMUNICATION OF THIS INFORMATION TO OTHERS, IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RESPIRONICS.

PRODUCT LINE: PINNACLE			RESPIRONICS®
PROCESS: ASSEMBLY			TITLE: PCA, MAIN, UBLOX R6001,WW
DRN BY:	L.HEAD	05.16.2022	SIZE D · DRAWING NO. A1153354 · REV. 0
CHK BY:	EDMS	EDMS	
APPR BY:	EDMS	EDMS	SCALE NA · PART NO. 1153354 · SHEET 2 OF 3

REV	C/N	REVISION RECORD	DATE	DRAWN BY:	CHECKED BY:	APPROVED BY:
		SEE SHEET 1				

SEE NOTE 9

TAPE IS NOT REQUIRED TO EXTEND TO BOARD EDGE

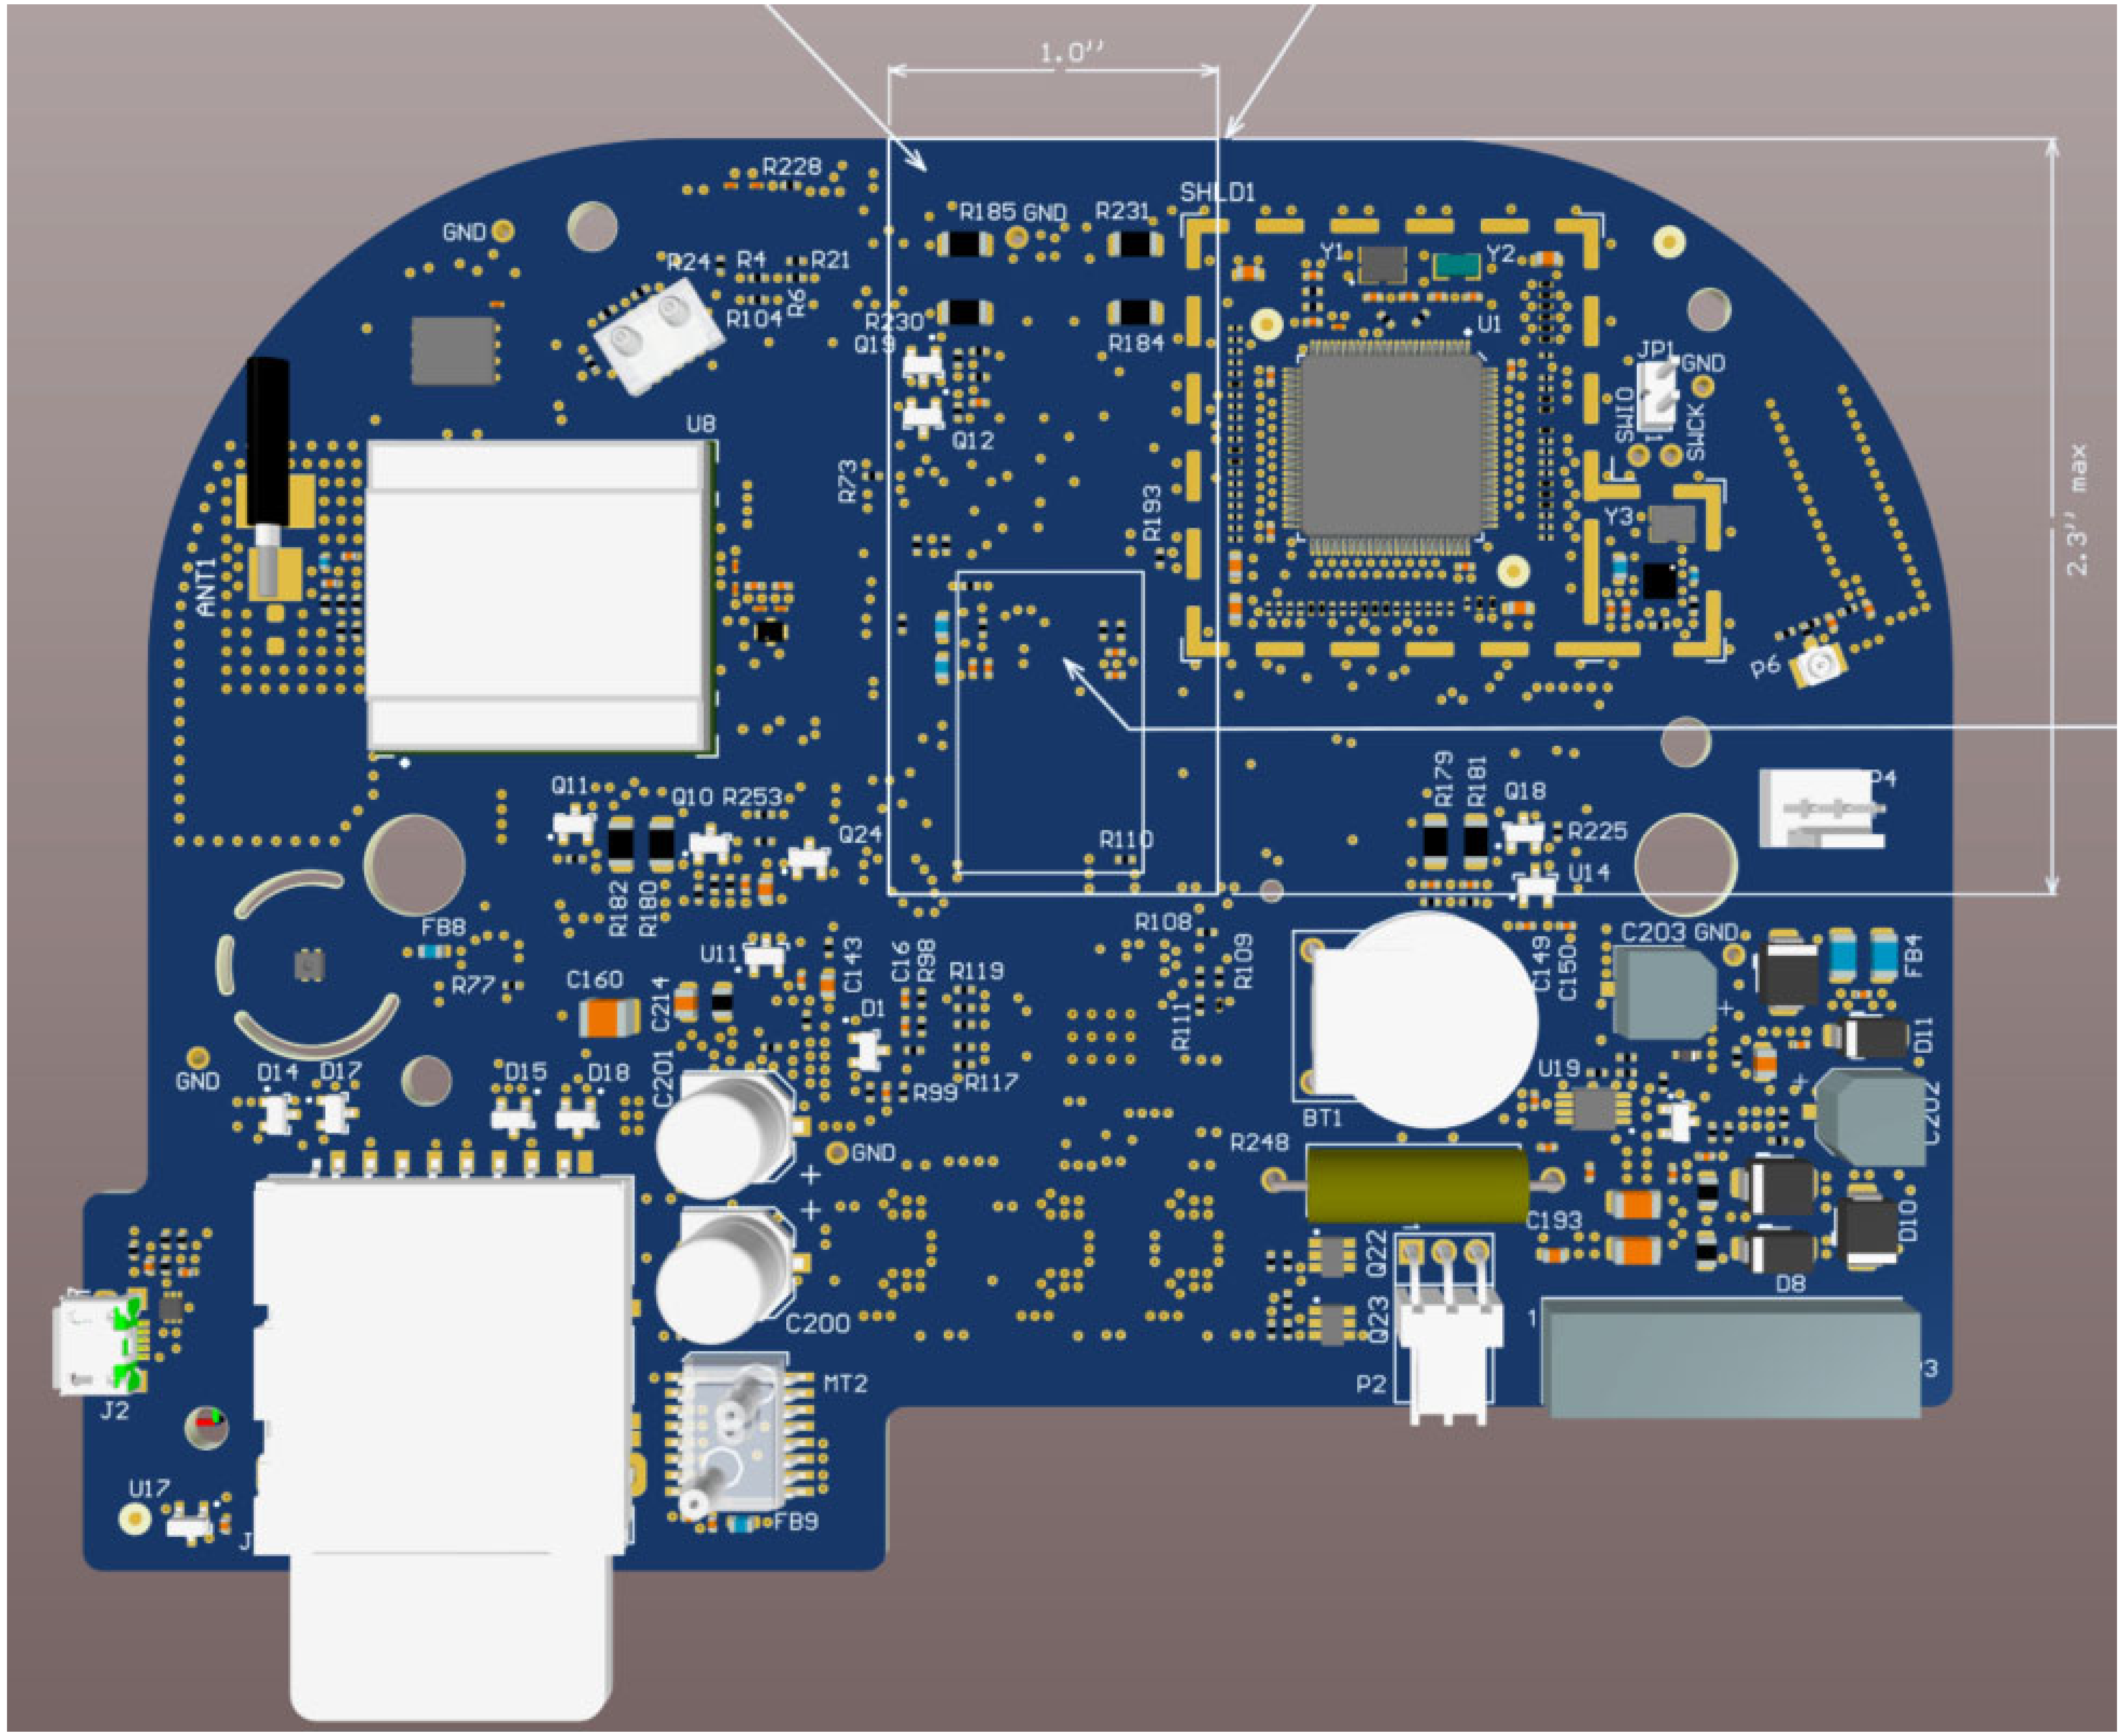

PARTS MUST BE COMPLETELY COVERED WITH TAPE
C140, C147, C148 & C199
R110, R194, R195, R197 & R273

SECONDARY LAYER

CONFIDENTIAL AND PROPRIETARY INFORMATION

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL AND PROPRIETARY BY RESPIRONICS. ALL DESIGN, MANUFACTURING, USE AND REPRODUCTION RIGHTS RELATED TO THIS INFORMATION, AND ALL SALES RIGHTS ASSOCIATED THEREWITH, ARE EXPRESSLY RESERVED BY AND TO RESPIRONICS. USE, REPRODUCTION OR DISTRIBUTION OF THIS INFORMATION, OR COMMUNICATION OF THIS INFORMATION TO OTHERS, IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RESPIRONICS.

PRODUCT LINE: PINNACLE

RESPIRONICS

PROCESS: ASSEMBLY

TITLE: PCA, MAIN, UBLOX R6001,WW

DRN BY:	L.HEAD	05.16.2022
CHK BY:	EDMS	EDMS
APPR BY:	EDMS	EDMS

SIZE: D
DRAWING NO. A1153354
REV. 0
SCALE NA
PART NO. 1153354
SHEET 3 OF 3