

Favorites (F11)

Tweaker

Settings

System Info.

Boot

Save & Exit

08/21/2025
Thursday 23:28

Intel Default Settings

GIGABYTE PerfDrive

Select MCU

Performance CPU Clock Ratio

Efficiency CPU Clock Ratio

Max Ring Ratio

Min Ring Ratio

Advanced CPU Settings

DDR5 Auto Booster

High Bandwidth

Low Latency

DDR5 XMP Booster

Extreme Memory Profile(X.M.P.)

System Memory Multiplier

Advanced Memory Settings

CPU/PCH Voltage Control

Vcore Voltage Mode

CPU Vcore

Dynamic Vcore(DVID)

BCLK Adaptive Voltage

CPU RING Voltage

Disabled

Optimization

Auto

0000012F

Auto

35

Auto

Auto

Auto

Auto

Enabled

Enabled

Disabled

XMP 1

DDR5-5600 36-36-36-76-1.200

Auto

5600

Auto

Auto

1.200V

-0.100V

+0.000V

Auto

Auto

1.050V

CPU

Frequency

5288.95MHz 3990.82

BCLK

99.75MHz

Temperature

41.0 °C

Voltage

1.218 V

Memory

Frequency

5586.33MT/s

Size

32768MB

Module MFG ID

TeamGroup

DRAM MFG ID

Hynix

Voltage

+5V

4.987 V

+12V

12.042 V

VCCSA

1.198 V

Settings

System Info.

Boot

Save & Exit

▼ C-States Control

CPU Enhanced Halt(C1E)	Enabled
C6/C7 State Support	Enabled
C8 State Support	Enabled
C10 State Support	Enabled
Package C State limit	Auto

▼ Turbo Power Limits

Package Power Limit1 - TDP (Watts)	Enabled
Package Power Limit1 Time	181
Package Power Limit2 (Watts)	Auto
Package Power Limit2 Time	181
Platform Power Limit1 (Watts)	Auto
Platform Power Limit1 Time	181
Platform Power Limit2 (Watts)	Auto
DRAM Power Limit1 (Watts)	181
DRAM Power Limit1 Time	Auto
DRAM Power Limit2 (Watts)	Auto
DRAM Power Limit2 Time	Auto
Core Current Limit(Amps)	200

▼ Turbo Per Core Limit Control

Auto

CPU

Frequency	5288.95MHz	3990.82	BCLK	99.75MHz
Temperature	42.0 °C		Voltage	1.227 V

Memory

Frequency	5586.33MT/s	Size	32768MB
Module MFG ID	TeamGroup	DRAM MFG ID	Hynix

Voltage

+5V	4.980 V	+12V	12.060 V
VCCSA	1.198 V		

Package Power Limit1 - TDP (Watts)

EASY MODE

ADVANCED MODE

08/21/2025
Thursday 23:28

Favorites (F11)

Tweaker

Settings

System Info.

Boot

Save & Exit

CPU Vcore Loadline Calibration
CPU Vcore Current Protection★ Low
Low

Internal VR Control

CPU

Frequency
5288.95MHz 3990.82BCLK
99.75MHzTemperature
41.0 °CVoltage
1.221 V

Memory

Frequency
5586.33MT/sSize
32768MBModule MFG ID
TeamGroupDRAM MFG ID
Hynix

Voltage

+5V
4.980 V+12V
12.042 VVCCSA
1.198 V

Loadline Scaling



GABYTE

EASY MODE

ADVANCED MODE

08/21/2025
Thursday 23:29

Favorites (F11)

Tweaker

Settings

System Info.

Boot

Save & Exit

▼ IA VR Config Enable

Enabled

IA AC Loadline

50

50

IA D Loadline

0

90

IA PS Current Threshold1

0

IA PS Current Threshold2

0

IA PS Current Threshold3

0

IA PS3 Enable

Disabled

IA PS4 Enable

Disabled

IA IMON Slope

0

IA IMON Offset

0

IA IMON Prefix

+

IA VR Current Limit

0

IA VR Voltage Limit

1400

IA TDC Enable

Disabled

IA TDC Current Limit

0

IA TDC Time Window

1 ms

IA TDC Lock

Disabled

IRMS

Disabled

▼ GT VR Config Enable

Disabled

CPU

Frequency

5288.95MHz 3990.82

BCLK

99.75MHz

Temperature

41.0 °C

Voltage

1.221 V

Memory

Frequency

5586.33MT/s

Size

32768MB

Module MFG ID

TeamGroup

DRAM MFG ID

Hynix

Voltage

+5V

4.980 V

+12V

12.042 V

VCCSA

1.198 V

ADVANCED MODE 04/10/2025 Thursday 22:11

Navigation: Favorites (F11) | Tweaker | Settings | System Info | Boot | Save & Exit

Extreme Memory Profile(X.M.P.)
System Memory Multiplier
Advanced Memory Settings

CPU/PCH Voltage Control

Setting	Value	Offset
Vcore Voltage Mode	Auto	
CPU Vcore	Normal	1.200V
Dynamic Vcore(DVID)	-0.100V	+0.000V
BCLK Adaptive Voltage	Auto	
CPU RING Voltage	Auto	1.050V
CPU RING Voltage Offset	Auto	+0.000V
Internal L2Atom Override Mode	Auto	
Internal L2Atom	Auto	
Internal L2Atom Offset	Auto	
Internal VCCSA	Auto	
CPU VCC0V AUX	Auto	1.500V
VCC1P05	Auto	1.050V
W0R02 PCH	Auto	0.820V
V1P0 CPU	Auto	1.800V
VCC100P	Auto	1.800V

Advanced Voltage Settings

DRAM Voltage Control

Offers multiple preset work modes for different level of CPU cooling.
- **Max Turbo** - WATERFORCE (WF) X 360. All cores turbo max clock.
- **Optimization** - WF X 240. Reasonable temp. with optimized performance.
- **Quiet Enhance** - Tower fan/Intel box fan. Lower temp. with legit performance.
- **Cores Disable** - Intel box fan. Even lower temp./power.

CPU
Frequency: 5488.37MHz
Temperature: 39.0 °C
Voltage: 0.933 V

BCLK
Frequency: 99.75MHz
Voltage: 0.933 V

Memory
Frequency: 5985.36MT/s
Module MFG ID: Kingston
Size: 32768MB
DRAM MFG ID: Hynix

Voltage
+5V: 5.062 V
+12V: 12.168 V
VCCSA: 1.248 V

ADVANCED MODE 04/10/2025 Thursday 22:13


Navigation: Favorites (F11) | Tweaker | Settings | System Info | Boot | Save & Exit

CPU Vcore Current Calibration

CPU Vcore Current Protection: Auto

Internal VR Control

Loadline Scaling

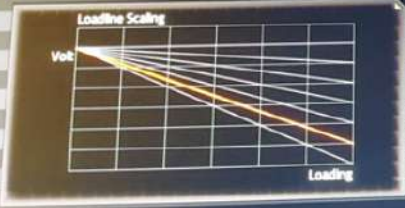

Loadline calibration helps to prevent CPU voltage drop when the system is under loading. It also improves CPU overclocking stability.
Notice: Greater values may lead to higher Vcore and higher CPU/VRM temperatures.

CPU
Frequency: 5488.37MHz
Temperature: 39.0 °C
Voltage: 0.933 V

BCLK
Frequency: 99.75MHz
Voltage: 0.933 V

Memory
Frequency: 5985.36MT/s
Module MFG ID: Kingston
Size: 32768MB
DRAM MFG ID: Hynix

Voltage
+5V: 5.070 V
+12V: 12.150 V
VCCSA: 1.248 V