z/OS 3.1

Metal C Programming Guide and Reference





© Copyright International Business Machines Corporation 2007, 2024.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures	Vİİ
Tables	xi
About this document	xiii
Who should read this document	xiii
Where to find more information	xiii
z/OS Basic Skills in IBM Documentation	xiii
How to read syntax diagrams	xiii
How to provide feedback to IBM	XV
Summary of changes	xvii
Summary of changes for z/OS 3.1	xvii
Chapter 1. About IBM z/OS Metal C	
Metal C environment	
Programming with Metal C	
Metal C and MVS linkage conventions	
Compiler-generated HLASM source code	
Prolog and epilog code	
Supplying your own HLASM statements	
Inserting HLASM instructions into the generated source code	
AMODE-switching support	
RENT mode support	
argc argv parsing support	
AR-mode programming support	
Metal C function descriptor support	
Defining an alternative name for function "main"	
Building Metal C programs	
Summary of useful references for the Metal C programmer	48
Chapter 2. Header files	
builtins.h — Declare built-in functions	
ctype.h — Declare character classification functions	
float.h — Define ISO C/C++ constants for floating-point data types	
inttypes.h — Define macros for sprintf and sscanf family	
iso646.h — Define macros for operators	
limits.h — Declare symbolic names for resource limits	
math.h — Define macros for floating-point support metal.h — Define Metal C related function prototypes and data	
stdarg.h — Define macros for accessing variable-length argument lists in functions	
stdbool.h — Define macros for bool type	
stddef.h — Define ptrdiff_t, size_t, and ssize_t data types	
stdio.h — Define I/O related functions	
stdint.h — Define integer types and related limits and macros	
stdlib.h — Define standard library functions	
string.h — Declare string manipulation functions	
Chapter 3. C functions available to Metal C programs	61

strtod — Convert Character String to Double	
strtof — Convert Character String to Float	
strtok() — Tokenize String	
strtok_r() — Split String into Tokens	
strtol() — Convert Character String to Long	
strtold — Convert Character String to Long Double	
strtoll() — Convert String to Signed Long Long	
strtoul() — Convert String to Unsigned Integer	
strtoull() — Convert String to Unsigned Long Long	112
tolower(), toupper() — Convert Character Case	
va_arg(), va_copy(), va_end(), va_start() — Access Function Arguments	
vsnprintf() — Format and print data to fixed length buffer	
vsprintf() — Format and Print Data to Buffer	
vsscanf() — Format Input of a STDARG Argument List	116
	440
Appendix A. Function stack requirements	119
Appendix B. CICS programming interface examples	123
Runtime environment adapter	
CICS application programming interface example	
Data structures	
Example description	
Example code	
CICS exit programming interface example	138
Example code	
CICS definitions	148
JCL example	149
Appendix C. Accessibility	153
Notices	
Terms and conditions for product documentation	
IBM Online Privacy Statement	
Policy for unsupported hardware	
Minimum supported hardware	
Programming interface information	
Standards	
Trademarks	158
Index	159

Figures

1. Prefix data fixed area fields	6
2. A sample program to generate prefix data	7
3. Prefix data generated	8
4. Function entry point marker in generated assembler code	8
5. Function property block fixed area fields	9
6. Function property block in generated assembler code	11
7. Debug data block generated	12
8. Specification of your own prolog and epilog code for a function	13
9. SCCNSAM(CCNZGBL)	16
10. SCCNSAM(MYPROLOG)	17
11. SCCNSAM(MYEPILOG)	19
12. Simple code format string	20
13. Code format string with two instructions	20
14. Code format string with two instructions, formatted for readability	21
15. Substitution of a C variable into an outputasm operand	21
16. HLASM source code embedded by the compiler	22
17. Substitution of a C pointer into anasm operand	22
18asm operand lists	23
19. Compiler-generated HLASM code from theasm statement	23
20. Unsuccessful attempt to specify registers	23
21. Register specification with clobbers	24
22 Incorrect asm operand definition for both input and output	24

23. Incorrect compiler-generated HLASM source code from the incorrectasm operand definition for both input and output	24
24. Successful definition of anasm operand for both input and output	25
25. Correct compiler-generated HLASM source code from the correctasm operand definition for both input and output	25
26. The + constraint to define anasm operand for both input and output	25
27. Error: Redundant definition of anasm operand	26
28. Specifying and using the WTO macro (no reentrancy)	26
29. Support for reentrancy in a code format string	27
30. Code that supplies specific DSECT mapping macros	27
31. Register specification	28
32. AMODE31 program that calls an AMODE64 program	29
33. Far pointer sizes under different addressing modes	33
34. Built-in functions for setting far-pointer components	34
35. Built-in functions for getting far-pointer components	35
36. Library functions for use only in AR-mode functions	35
37. Allocation and deallocation routines	37
38. Copying a C string pointer to a far pointer	39
39. Example of a simple dereference of a far pointer	39
40. Metal C application build process	41
41. C source file (mycode.c) that builds a Metal C program	41
42. C compiler invocation to generate mycode.s	42
43. Command that invokes HLASM to assemble mycode.s	42
44. Command that compiles an HLASM source file containing symbols longer than eight characters	42
45. Command that binds mycode.o and produces a Metal C program in an MVS data set	43
46. Commands that compile and link programs with different addressing modes	43
47. Job step that compiles HLO.SOURCE.C(MYCODE)	43

48. Assembly step of HLQ.SOURCE.ASM(MYCODE)	44
49. Job step that binds the generated HLASM object into a program	44
50. The process of building Metal C programs with IPA	45
51. JCL that invokes the ASMLANGX utility	48
52. CICS API example flow	124
53. CICS Bootstrap for metal C code example: MTLBOOT	126
54. CICS API used under Metal C example code: MTLHALO	133
55. Metal C for CICS main prolog: MTLENT	134
56. Metal C for CICS main epilog: MTLXIT	135
57. Metal C for CICS subroutine prolog: MTLSENT	136
58. Metal C for CICS subroutine epilog: MTLSXIT	138
59. CICS XPI example flow	139
60. CICS bootstrap for Metal C example program: MTLBTXPI	140
61. CICS exit programming API example program: MTL2XPI	146
62. CICS CEDA definition for the API example program	149
63. CICS transaction definition	149
64. Defining the CICS XPI example in the CEDA	149
65. CICS LNKXPI JCL example	150
66. CICS ASMXPI JCL example	150
67. CICS CCXPI JCL example	151
68 CICS OPTXPLICL example	151

Tables

1. Syntax examples	xiv
2. Compiler-generated global SET symbols	14
3. User modifiable global SET symbols	16
4. Language constructs that may have special impact on far pointers	33
5. Implicit ALET associations for AR-mode-function variables	34
6. Summary of useful references for the Metal C programmer	48
7. Definitions in float.h	52
8. Macros and associated operators	55
9. Macros that are defined in stdbool.h	57
10. csysenv argument incinit()	68
11. csysenvtkn argument incterm()	70
12. Flag Characters for sprintf() Family	84
13. Precision Argument in sprintf()	86
14. Type Characters and their Meanings	87
15. Conversion Specifiers in sscanf()	92
16. Stack frame requirements for Metal C runtime functions	119

About this document

This document contains reference information that is intended to help you understand the IBM z/OS Metal C runtime library and use the header files and functions provided by the runtime to write applications that can be compiled using the METAL option of the z/OS XL C compiler.

For more information about the z/OS XL C compiler and the METAL compiler option, see $\underline{z/OS}$ XL C/C++ User's Guide.

Who should read this document

This document is intended for application programmers interested in writing Metal C applications using the z/OS Metal C runtime library.

Where to find more information

For an overview of the information associated with z/OS, see z/OS Information Roadmap.

z/OS Basic Skills in IBM Documentation

z/OS Basic Skills in IBM Documentation is a Web-based information resource intended to help users learn the basic concepts of z/OS, the operating system that runs most of the IBM mainframe computers in use today. IBM Documentation is designed to introduce a new generation of Information Technology professionals to basic concepts and help them prepare for a career as a z/OS professional, such as a z/OS system programmer.

Specifically, z/OS Basic Skills is intended to achieve the following objectives:

- Provide basic education and information about z/OS without charge
- Shorten the time it takes for people to become productive on the mainframe
- Make it easier for new people to learn z/OS.

z/OS Basic Skills in IBM Documentation (www.ibm.com/docs/en/zos-basic-skills?topic=zosbasics/com.ibm.zos.zbasics/homepage.html) is available to all users (no login required).

How to read syntax diagrams

This section describes how to read syntax diagrams. It defines syntax diagram symbols, items that may be contained within the diagrams (keywords, variables, delimiters, operators, fragment references, operands) and provides syntax examples that contain these items.

Syntax diagrams pictorially display the order and parts (options and arguments) that comprise a command statement. They are read from left to right and from top to bottom, following the main path of the horizontal line.

For users accessing the Information Center using a screen reader, syntax diagrams are provided in dotted decimal format.

Symbols

The following symbols may be displayed in syntax diagrams:

Symbol

Definition

--

Indicates the beginning of the syntax diagram.

Indicates that the syntax diagram is continued to the next line.

Indicates that the syntax is continued from the previous line.

---►◀

Indicates the end of the syntax diagram.

Syntax items

Syntax diagrams contain many different items. Syntax items include:

- Keywords a command name or any other literal information.
- Variables variables are italicized, appear in lowercase, and represent the name of values you can supply.
- Delimiters delimiters indicate the start or end of keywords, variables, or operators. For example, a left parenthesis is a delimiter.
- Operators operators include add (+), subtract (-), multiply (*), divide (/), equal (=), and other mathematical operations that may need to be performed.
- Fragment references a part of a syntax diagram, separated from the diagram to show greater detail.
- Separators a separator separates keywords, variables or operators. For example, a comma (,) is a separator.

Note: If a syntax diagram shows a character that is not alphanumeric (for example, parentheses, periods, commas, equal signs, a blank space), enter the character as part of the syntax.

Keywords, variables, and operators may be displayed as required, optional, or default. Fragments, separators, and delimiters may be displayed as required or optional.

Item type Definition

Required

Required items are displayed on the main path of the horizontal line.

Optional

Optional items are displayed below the main path of the horizontal line.

Default

Default items are displayed above the main path of the horizontal line.

Syntax examples

The following table provides syntax examples.

Table 1. Syntax examples	
Item	Syntax example
Required item.	➤ KEYWORD — required_item →
Required items appear on the main path of the horizontal line. You must specify these items.	
Required choice.	► KEYWORD required_choice1
A required choice (two or more items) appears in a vertical stack on the main path of the horizontal line. You must choose one of the items in the stack.	required_choice2

Table 1. Syntax examples (continued) **Item** Syntax example Optional item. **►** KEYWORD Optional items appear below the main optional_item path of the horizontal line. Optional choice. **▶** KEYWORD An optional choice (two or more items) optional_choice1 appears in a vertical stack below the optional choice2 main path of the horizontal line. You may choose one of the items in the stack. Default. default_choice1 Default items appear above the - KEYWORD main path of the horizontal line. optional_choice2 The remaining items (required or optional) appear on (required) or optional_choice3 below (optional) the main path of the horizontal line. The following example displays a default with optional items. Variable. ► KEYWORD — variable → Variables appear in lowercase italics. They represent names or values. Repeatable item. An arrow returning to the left above **►** KEYWORD repeatable_item the main path of the horizontal line indicates an item that can be repeated. A character within the arrow means you must separate repeated items with → KEYWORD repeatable_item that character. An arrow returning to the left above a group of repeatable items indicates that one of the items can be selected, or a single item can be repeated. Fragment. **▶** KEYWORD fragment | The fragment symbol indicates that fragment a labelled group is described below the main syntax diagram. Syntax is ,required_choice1 occasionally broken into fragments if ,default_choice the inclusion of the fragment would ,required_choice2 overly complicate the main syntax diagram. ,optional_choice

How to provide feedback to IBM

We welcome any feedback that you have, including comments on the clarity, accuracy, or completeness of the information. For more information, see How to send feedback to IBM.

Summary of changes

This information includes terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations for the current edition are indicated by a vertical line to the left of the change.

Note: IBM z/OS policy for the integration of service information into the z/OS product documentation library is documented on the z/OS Internet Library under IBM z/OS Product Documentation Update Policy (www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy).

Summary of changes for z/OS 3.1

This information contains no technical changes for z/OS 3.1.

Chapter 1. About IBM z/OS Metal C

The XL C METAL compiler option generates code that does not require access to the Language Environment® support at run time. The METAL option provides C-language extensions that allow you to specify assembly statements that call system services directly. Using these language extensions, you can provide almost any assembly macro, and your own function prologs and epilogs, to be embedded in the generated HLASM source file. When you understand how the METAL-generated code uses MVS™ linkage conventions to interact with HLASM code, you can use this capability to write freestanding programs.

Because a freestanding program does not depend on any supplied runtime environment, it must obtain the system services that it needs by calling assembler services directly. For information about how METAL-generated code uses MVS linkage conventions, see "Metal C and MVS linkage conventions" on page 2. For information about embedding assembly statements in the METAL-generated HLASM source code, see "Inserting HLASM instructions into the generated source code" on page 20.

You do not always have to provide your own libraries. IBM supplies a subset of the XL C runtime library functions. This subset includes commonly used basic functions such as malloc(). For more information, see Chapter 3, "C functions available to Metal C programs," on page 61.

Note: You can use these supplied functions or the ones that you provide yourself.

Metal C environment

Some of the functions require that an environment be created before they are called. You can create the environment by using a new function, __cinit(). This function will set up the appropriate control blocks and return an environment token to the caller. The caller must then ensure that GPR 12 contains this token when calling Metal C functions that require an environment. When the environment is no longer needed, a new function, __cterm(), can be used to perform cleanup, freeing all resources that had been obtained by using the token.

An environment created by __cinit() can be used in both AMODE 31 and AMODE 64. In conjunction with this, the Metal C run time maintains both a below-the-bar heap and an above-the-bar heap for each environment. Calls to __malloc31() always affect the below-the-bar heap. Calls made in AMODE 31 to all other functions that obtain storage will affect the below-the-bar heap; calls made in AMODE 64 affect the above-the-bar heap.

The storage key for all storage obtained on behalf of the environment is the psw key of the caller. The caller needs to ensure that the environment is always used with the same or compatible key.

Metal C environments are intended to be used serially by a single dispatchable unit of work. If you need to share environments between multiple dispatchable units, you must make sure that the use of each environment is serialized.

Programming with Metal C

When you want to build an XL C program that can run in any z/OS environment, you can use the Metal C programming features provided by the XL C compiler as a high level language (HLL) alternative to writing the program in assembly language.

Metal C programming features facilitate direct use of operating system services. For example, you can use the C programming language to write installation exits.

When the METAL option is in effect, the XL C compiler:

Generates code that is independent of Language Environment.

Note: Although the compiler generates default prolog and epilog code that allows the Metal C code to run, you might be required to supply your own prolog and epilog code to satisfy runtime environment requirements.

• Generates code that follows MVS linkage conventions. This facilitates interoperations between the Metal C code and the existing code base. See "Metal C and MVS linkage conventions" on page 2.

Note: Metal C also provides a feature that improves the program's runtime performance. See "NAB linkage extension" on page 3.

- Provides support for accessing the data stored in data spaces. See <u>"AR-mode programming support" on</u> page 32.
- Provides support for embedding your assembly statements into the compiler-generated code. See "Inserting HLASM instructions into the generated source code" on page 20.

If you use the METAL compiler option together with XL C optimization capabilities, you can use C to write highly optimized system-level code.

The METAL compiler option implies certain other XL C compiler options and disables others. For detailed information, see the METAL | NOMETAL (C only) option in *z/OS XL C/C++ User's Guide*.

Metal C and MVS linkage conventions

Because Metal C can follow MVS linkage conventions, it can enable the compiler-generated code to interoperate directly with the existing code base depending on the linkage that is used. For detailed information about MVS linkage conventions, see the topic about linkage conventions in <u>z/OS MVS</u> Programming: Assembler Services Guide.

For information about the default linkage, refer to the following sections:

- "Parameter passing" on page 2
- "Return values" on page 2
- "Function save areas" on page 3

Parameter passing

The pointer to the parameter list is in GPR 1.

The parameter list is divided into slots.

- The size of each slot depends on the addressing mode:
 - For 31-bit mode (AMODE 31), each slot is four bytes in length.
 - For 64-bit mode (AMODE 64), each slot is eight bytes in length.
- Metal C derives the content of each slot from the function prototype, which follows C by-value semantics (that is, the value of the parameter is passed into the slot).

Notes:

- 1. If a parameter needs to be passed by reference, the function prototype must specify a pointer of the type to be passed.
- 2. Under AMODE 31 only: The high-order bit is set on the last parameter if both of the following are true:
 - The called function is a variable arguments function.
 - The last parameter passed is a pointer.

Return values

For any addressing mode, integral type values are returned in GPR 15. Under AMODE 31 only, a 64-bit integer value is returned in GPR 15 + GPR 0 (that is, the high-half of the 64-bit value is returned in GPR 15 and the low-half is returned in GPR 0). All other types are returned in a buffer whose address is passed as the first parameter.

Function save areas

GPR 13 contains the pointer to the dynamic storage area (DSA).

The DSA includes:

- 72-byte save area size for an AMODE 31 function.
- Parameter area for calling other functions. The default pointer size for a parameter or return value is based on the amode attribute of the function prototype.
- Temporary storage that is preallocated for the compiler-generated code and the user-defined automatic variables.

The save area is set up at the beginning of the DSA.

If the function calls only primary-mode functions, the save area format depends on the AMODE:

- Under AMODE 31, the save area takes the standard 18-word format.
- Under AMODE 64, the save area takes the 36-word F4SA format and the compiler will generate code to set up the F4SA signature in the second word of the save area.

If the function needs to call an AR-mode function, the save area will take the 54-word F7SA format, regardless of the addressing mode.

The F4SA signature generation can be suppressed by setting the &CCN_SASIG global SET symbol to 0 in your prolog code. For information about the &CCN_SASIG global SET symbol, see <u>Table 3 on page 16</u> User modifiable global SET symbols.

NAB linkage extension

Metal C code needs to use dynamic storage area (DSA) as stack space. Each time a function is called, its prolog code acquires this space and, when control is returned to the calling function, its epilog code releases the stack space.

Metal C avoids excessive acquisition and release operations by providing a mechanism that allows a called function to rely on pre-allocated stack space. This mechanism is the next available byte (NAB). All Metal C runtime library functions, as well as functions with a default prolog code, use it and expect the NAB address to be set by the calling function. The code that is generated to call a function includes the setup instructions to place the NAB address in the "Address of next save area" field in the save area. The called function simply goes to the calling function's save area to pick up the NAB address that points to its own stack space. As a result, the called function does not need to explicitly obtain and free its own stack space.

Note: If usage of the NAB linkage extension requires more stack space than has been allocated, there will be unexpected results. The program must establish a DSA that is large enough to ensure the availability of stack space to all downstream programs. Downstream programs include all functions that are defined in the program as well as the library functions listed in <u>Appendix A</u>, "Function stack requirements," on page 119.

The location of the "Address of next save area" field depends on the save area format:

- In the standard 72-byte save area, it is the third word.
- In the F4SA or F7SA save area, it is the 18th doubleword.

Compiler-generated HLASM source code

When the METAL option is in effect, the XL C compiler generates code in the HLASM source code format.

Characteristics of compiler-generated HLASM source code

Any assembly instructions that you provide need to work with the instructions that are generated by the compiler. Before you provide those instructions, you need to be aware of the characteristics of compiler-generated HLASM source code.

You need to be aware that:

- Because the compiler uses relative-branching instructions, it is not necessary to establish code base
 registers. When the compiler detects user-embedded assembly statements, you can use the IEABRCX
 DEFINE instruction to assist any branching instructions that might rely on establishment of a code base
 register. For other instructions (such as LA or EX) that rely on the establishment of a code base register,
 you might need to add code to establish your own code base register. To disable the effect of IEABRCX,
 you can add the instruction IEABRCX DISABLE. For more information about the IEABRCX macro, see
 z/OS MVS Programming: Authorized Assembler Services Reference EDT-IXG.
- If the compiler needs to produce literals, GPR 3 will be set up as the base register to address the literals. This addressability is established after the prolog code. The literals are organized by the LTORG instruction placed at the end of the epilog code. With the presence of user-embedded assembly statements, the compiler assumes there will be literals and establishes GPR 3 to address those literals.
- If you want code to be naturally reentrant, you must not use writable static or external variables; such variables are part of the code.
- There is only one CSECT for each compilation unit. The CSECT name is controlled by the CSECT option.
- Due to the flat name space and the case insensitivity required by HLASM, the compiler prepends extra qualifiers to user names to maintain the uniqueness of each name seen by HLASM. This is referred to as *name encoding*. External symbols are not subject to the name-encoding scheme as they need to be referenced by the exact symbol names.
- The external symbols are determined by the compiler LONGNAME option.
 - If the NOLONGNAME option is in effect:
 - All external symbols are truncated to eight characters.
 - All external symbols are converted to upper case.
 - All "_" characters are replaced with the "@" character.
 - If the LONGNAME option is in effect the compiler emits an ALIAS instruction to make the real C name externally visible. Because the length limit supported by the ALIAS instruction depends on the HLASM release, the C compiler does not enforce any length limit here.

Note: The HLASM GOFF option is necessary to allow the ALIAS instructions to be recognized. See Figure 44 on page 42.

- GPR 13 is established as the base of the stack space.
- GPR 10 and GPR 11 may be used exclusively to address static and constant data. They should not be used in the user-embedded assembly statements.
- The compiler will generate code to preserve FPR 8 through FPR 15 if they are altered by the function.
- For AMODE 31 functions: The compiler will generate code to preserve the high halves of the 64-bit GPRs if they are altered or if there are user-embedded assembly statements.
- The addressing mode is determined by the compiler option. When the compiler option LP64 is in effect, the addressing mode is AMODE 64; otherwise it is AMODE 31.

Structure of a compiler-generated HLASM source program

Each compiler-generated HLASM source program has the following elements:

- File-scope header
- For each function:
 - A function header

- A function entry point marker
- A function property block (FPB)
- A function body
- A function trailer
- · File-scope trailer

File-scope header

Statements in the file-scope header apply to the entire compilation unit and might have the following statements:

- TITLE statement to specify the product information of the compiler and the source file being compiled.
- ALIAS/EXTRN statement to declare the external symbols that are referenced in the program, if the LONGNAME compiler option is in effect.
- CSECT statement to identify the relocatable control section in the program.
- AMODE statement to specify the addressing mode.
- RMODE statement to specify the residency mode for running the module.
- Assembly statements to declare the HLASM global SET symbols used by the compiler-generated code for communicating information to the user-embedded prolog and epilog code, if the compiler detects user-embedded prolog and epilog code.
- SYSSTATE ARCHLVL statement, which identifies the minimum hardware requirement. SYSSTATE ARCHLVL=3, if and only if ARCH(7) or up and OSREL(ZOSV2R1) or higher are in effect; otherwise, SYSSTATE ARCHLVL=2.
- IEABRCX DEFINE statement ensures that all branch instructions are changed to relative-branching instructions, in the event that the XL C compiler encounters user-embedded assembly statements.
- Prefix data to embed a compiler signature and to record attributes about the compilation.

Prefix data

Prefix data is generated to supply a signature, the timestamp of the compilation date, the compiler version, and some control flags. It is placed at the beginning of the code that follows an instruction for branching around the prefix data.

Note: Program code should reference ENTRY rather than CSECT to avoid unnecessary branching.

The prefix data consists of a fixed part (36 bytes in size) followed by a contiguous optional part, with the presence of optional fields indicated by flag bits in flag set 4. Optional fields, if present, are stored immediately following the fixed part of the prefix data aligned on halfword boundaries in the order specified by the left to right bits in flag set 4.

Figure 1 on page 6 shows the prefix data fixed area fields and definitions.

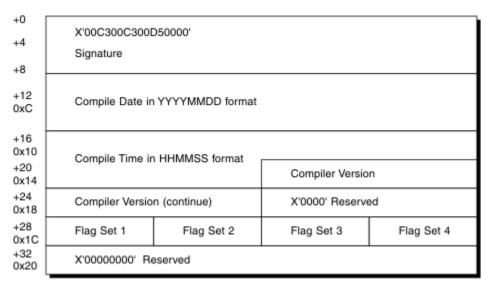


Figure 1. Prefix data fixed area fields

Signature

An 8-byte field that is set to $0\times00C300C300D50000$. The last byte in the signature is the version number which can change in future releases.

Compile date

An 8-byte field that contains the date of the compile in YYYYMMDD format.

Compile time

A 6-byte field that contains the time of the compile in HHMMSS format.

Compiler version

A 4-byte field that contains the binary value of the compiler version and release.

Flag Set 1

Flag definition

'.1.....'

Compiled with RENT option.

'.0.....'

Compiled with NORENT option.

'0.000000

Reserved.

Flag Set 2

Flag definition

'00000000'

Reserved.

Flag Set 3

Flag definition

'00000000'

Reserved.

Flag Set 4

Flag definition

'1.....

Indicates the presence of a user comment string.

'0.....

Indicates no optional user comment string.

'.1.....'

Indicates the presence of a service string.

'.0.....'

Indicates no service string.

'..1....'

Indicates the presence of the offset of the end of the current CSECT.

'..0....'

Indicates no offset of the end of the current CSECT.

'...1....'

Indicates the presence of the offset of the debug information block.

'...0....'

Indicates no offset of the debug information block.

'....0000'

Reserved.

There are four optional prefix data fields, whose presence is indicated by a flag bit in flag set 4.



User Comment String: The user comment string comes from the string specified in both or one of #pragma comment(copyright, "...") and #pragma comment(user, "..."). If you have either or both #pragma, the flag bit is set to one, and the user comment string contains the concatenated strings from multiple #pragma.



Service String: The service string comes from the string specified in the SERVICE compiler option.

```
Signed offset of the end of current CSECT (Flag Set 4 Bit 2) Length = 4
```

Signed offset of the end of current CSECT: A 32-bit field that contains the signed offset from PFD (Prefix Data) to the end of the current CSECT.

```
Signed offset of the debug data block (Flag Set 4 Bit 3)

Length = 4
```

Signed offset of the debug data block : A 32-bit field that contains the signed offset from PFD to the debug data block.

Examples

<u>Figure 2 on page 7</u> and <u>Figure 3 on page 8</u> show how prefix data is generated from a sample program that is compiled with the RENT, SERVICE ("Service String"), and DEBUG (or -g) options.

```
#pragma comment(copyright, "copyright comment")
#pragma comment(user, "user comment")
int main(){
   return 0;
}
```

Figure 2. A sample program to generate prefix data

```
@@PFD@@
          DC
                 XL8'00C300C300D50000'
                                            Prefix Data Marker
                                                                                   800000
                 CL8'20160513'
          DC
                                            Compiled Date YYYYMMDD
                                                                                   000008
                                            Compiled Time HHMMSS
Compiler Version
                                                                                   800000
          DC
                 CL6 '152705 '
          DC
                 XL4'42030000'
                                                                                   000008
                 XL2'0000'
          DC
                                            Reserved
                                                                                   000008
          DC
                 BL1'00000000'
                                            Flag Set 1
                                                                                   000008
                                            Flag Set 2
          DC
                 BL1'00000000'
                                                                                   800000
                BL1'00000000'
BL1'11110000'
          DC.
                                            Flag Set 3
                                                                                   000008
          DC.
                                            Flag Set 4
                                                                                   000008
          DC
                 XL4'00000000'
                                                                                   800000
          DS OH
                                                                                   000008
          DC AL2(30)
                                                                                   800000
          DC C'copyright comment user comment'
                                                                                   800000
          DS 0H
                                                                                   000008
          DC AL2(14)
                                                                                   000008
          DC C'Service String'
                                                                                   000008
                 A(@@END@@-@@PFD@@)
          DC
                                                                                   800000
                 A(@@DDB@@-@@PFD@@)
                                                                                   000008
```

Figure 3. Prefix data generated

Function elements

Function header

The function header might have the following statements or code:

- ALIAS/ENTRY statement to define the entry point by associating its C symbol with the generated HLASM name, if the LONGNAME compiler option is in effect.
- Assembly statements to set the values for the declared HLASM global SET symbols, if the compiler detects user-embedded prolog and epilog code.
- Prolog code, which might be either the default prolog code generated by the compiler or userembedded prolog code.

Function entry point marker

A function entry point marker is generated immediately before the entry point of each function. The function entry point marker is an 8-byte field containing the signature 0x00C300C300D501nn. Immediately following the marker is a 4-byte signed offset from the start of the entry point marker to the function property block belonging to the current function. Figure 4 on page 8 shows what a function entry point marker looks like in generated assembler code.

```
ENTRY @@CCN@2

@@CCN@2 AMODE 31

DC XL8'00C300C300D50100' Function entry point marker 000005

DC A(@@FPB@1-*+8) Signed offset to FPB 000005

DC XL4'00000000' Reserved 000005

@@CCN@2 DS 0F
```

Figure 4. Function entry point marker in generated assembler code

Function property block

The function property block (FPB) is made up of a fixed part (20 bytes in size) followed by a contiguous optional part, with the presence of optional fields indicated by flag bits. Optional fields, if present, are stored immediately following the fixed part of the FPB aligned on fullword boundaries in the order specified below.

Figure 5 on page 9 shows the FPB fixed area fields and the definitions.

+0 [X'CCD5' Eyecatcher		Saved GPR Mask	
+8	Signed offset to Prefix Data from the start of FPB			
	Flag Set 1	Flag Set 2	Flag Set 3	Flag Set 4
+12 0xC	X'00000000' Reserved			
+16 0x10	X'00000000' Reserved			

Figure 5. Function property block fixed area fields

Eyecatcher

A 16-bit field that is set to 0xCCD5.

Saved GPR Mask

A 16-bit mask, indicating which registers are saved and restored by the associated routine. Bit 0 indicates register 0, followed by bits for registers 1 to 15 in order.

Signed offset to Prefix Data from the start of FPB

The offset of the prefix data belonging to the compilation unit containing the function described by this FPB.

Flag Set 1

Flag definition

'1.....'

Function is AMODE 64.

'0.....'

Function is AMODE 31.

'.1.....'

Function is AR mode.

'.0.....'

Function is primary mode.

1.00000.1

Reserved.

'.....1[']

A vararg function.

'.....0¹

Not a vararg function.

Flag Set 2

Flag definition

'1.....'

External function.

'0......

Internal function.

'.....00

This function has the standard 72-byte save area.

'.....01

This function has the F4SA 144-byte save area.

'.....10

This function has the F7SA 216-byte save area.

'.00000..'

Reserved.

Flag Set 3

Flag definition

'1.....'

Indicates the floating-point registers (FPR) are saved in the DSA and the FPR mask and offset to the FPR save area are present in the optional part of the FPB.

'0.....

Indicates the floating-point registers (FPR) are not saved in the DSA.

'.1.....'

Indicates the high-half of 64-bit general purpose registers (GPR) are saved in the DSA and the HGPR mask and offset to the HGPR save area are present in the optional part of the FPB.

'.0.....'

Indicates the high-half of 64-bit general purpose registers (GPR) are not saved in the DSA.

'..000000'

Reserved.

Flag Set 4

Flag definition

'0000000.

Reserved.

'.....1'

Indicates that the length of the function name and the function name field are present in the optional part of the FPB.

'.....0[']

Indicates that the function name field is not present in the FPB.

Note: When the COMPRESS compiler option is in effect, the function name field is not present in the FPB.

There are several optional FPB fields. The presence of each field is indicated by a flag bit in FPB flag set 3 or FPB flag set 4. When an optional field is less than 4 bytes in length, the entire word is present if any of the fields in that word are present. Unused parts of the word are filled with zeroes. The optional fields are fullword aligned and appear in the order listed below.



FPR Mask

A 16-bit mask indicating which of floating-point registers (FPR) are saved and restored by this function. Bit 0 indicates FPR0, followed by bits for FPR1 to FPR 15.

HGPR Mask

A 16-bit mask indicating which of 64-bit general purposes registers (GPR) whose high-words are saved and restored by this function. Bit 0 indicates GPR0, followed by bits for GPR1 to GPR 15.

Note: If either bit 0 or bit 1 of flag set 3 is on, the fullword variable representing FPR mask and HGPR mask is present.

FPR Savearea Offset (Flag Set 3 Bit 0) Length ≈ 4


FPR Savearea Offset

A 32-bit field containing the offset from the start of the DSA to the FPR save area. The contents of the FPRs indicated by the FPR Mask are stored contiguously from the beginning of the FPR save area regardless of the register number. For example, if the FPR Mask contains 0x00A0 and the FPR save area offset contains 0x100, FPR8 is stored at R13+0x100 and FPR10 is stored at R13+0x108.

HGPR Savearea Offset (Flag Set 3 Bit 1) Length = 4

HGPR Savearea Offset

A 32-bit field containing the offset from the start of the DSA to the HGPR save area. The HGPR save area is 64-byte in size which holds 16 32-bit high-words. The order of the high-words stored in the save area is GPR14, GPR15, and GPR0 - GPR13. Only the slots which correspond to the bits in the HGPR Mask contain the saved high-word contents.



Name of Function

The optional function name fields start with a 2-byte length field which contains the actual length of the function name that follows.

Figure 6 on page 11 shows what a function property block looks like in generated assembler code.

```
@@FPB@ LOCTR
@@FPB@1 DS OF
                                Function Property Block
                                                                               000000
        DC XL2'CCD5'
DC BL2'1111100000000011'
                                                                               000000
                                         Eyecatcher
                                         Saved GPR Mask
                                                                               000000
         DC A(@@PFD@@-@@FPB@1)
                                         Signed Offset to Prefix Data
                                                                               000000
        DC BL1'00000000'
DC BL1'10000000'
                                         Flag Set 1
                                                                               000000
                                         Flag Set 2
                                                                               000000
         DC BL1'01000000'
                                         Flag Set 3
                                                                               000000
         DC BL1'00000001'
                                         Flag Set 4
                                                                               000000
         DC XL4'00000000'
                                         Reserved
                                                                               000000
        DC XL4'00000000'
                                                                               000000
                                         Reserved
         DC XL2'0000'
                                         Saved FPR Mask
                                                                               000000
         DC BL2'1111000000000011'
                                         Saved HGPR Mask
                                                                               000000
         DC XL4'00000058'
                                         HGPR Save Area Offset
                                                                               000000
         DC AL2(4)
                                                                               000000
        DC C'main'
```

Figure 6. Function property block in generated assembler code

In this example, the @@FPB@ LOCTR instruction tells the assembler to group all FPBs separate from the code and data generated for the functions.

File-scope trailer

The file-scope trailer might have the following statements or areas:

- DC statements to define static variables with their initial values.
- DSECT statement to provide a map for the static variables.
- · DC statements that define constants.
- ALIAS/ENTRY statement to define all external variables with their initial values.
- END statement to specify compiler product information and the compilation date.
- A debug data block to check whether the debug side file matches the object file.
- · A label to mark the end of a CSECT.

Debug data block

When you specify the -g or DEBUG option, a new debug data block is added for each CSECT in the Metal C generated assembly file. The debug data block can be used to check whether the debug side file matches the object file. When a debug session starts, the debugger checks whether the debug data block for the first CSECT exists. If it exists, the debugger retrieves the information from the debug data block.

The debug data block contains the following information:

Debug data block signature

An 8-byte field that is set to 0x'00C300C300D50200'. The last two bytes of the signature is 0x'0200', in which the first byte 0x'02' is the block signature for the debug data block, while the second byte 0x'00' represents the current version of the debug data block.

Size of the debug data block

A 4-byte field that represents the size of the debug data block.

Reserved bytes

A 4-byte field that is reserved for future usage.

MD5 signature

A 16-byte field that is derived from the time stamp.

Source file name

A string with 2-byte prefix length, containing the source file name.

Debug side file name

A string with 2-byte prefix length, containing the debug side file name.

Example

The following example shows a sample debug data block followed by a CSECT end label.

Figure 7. Debug data block generated

Labels for @@DDBE@@ and @@END@@ do not have to be the same.

Prolog and epilog code

The primary functions of prolog code are:

- To save the calling function's general-purpose registers in the calling function's save area.
- To obtain the dynamic storage area for this function.
- To chain this function's save area to the calling function's save area, in accordance with the MVS linkage convention.

The primary functions of epilog code are:

- To relinquish this function's dynamic storage area.
- To restore the calling function's general-purpose registers.
- To return control to the calling function.

Note: AR-mode functions require additional prolog and epilog functions. See <u>"AR-mode programming support"</u> on page 32 for details.

Supplying your own prolog and epilog code

If you need the prolog and epilog code to provide additional functionality, you can use #pragma directives to instruct the compiler to use your own HLASM prolog and epilog code. Figure 8 on page 13 provides an example.

```
#pragma prolog(foo,"MYPROLOG")
#pragma epilog(foo,"MYEPILOG")
int foo() {
   return 0;
}
```

Figure 8. Specification of your own prolog and epilog code for a function

To apply the same prolog and epilog code to all your functions in the C source file, use the PROLOG and EPILOG compiler options. When you use the PROLOG and EPILOG compiler options, by default, your prolog and epilog code is applied only to the functions that have external linkage. To apply your prolog and epilog code to all functions defined in the compilation unit, use the new "all" suboption provided by z/OS V1R11 XL C compiler. For detailed information, see PROLOG and EPILOG options in z/OS XL C/C++ User's Guide.

The string you supplied to the PROLOG/EPILOG options or the #pragma directives must contain valid HLASM statements. The compiler does not validate the content of the string but it does take care of some formatting for you:

- If your string contains only a macro name, as shown in <u>Figure 8 on page 13</u>, you do not need to supply leading blanks.
- If the length of your HLASM statement exceeds 71 characters, you do not need to break it into multiple lines. The compiler will handle that for you.

Your prolog code needs to ensure that:

- The primary functions of the prolog code have been performed.
- Extra DSA space is acquired, in the event that the NAB is needed for the referenced functions.
- Upon exit of your prolog code:
 - GPR 13 points at the DSA for this function.
 - GPR 1 points at the parameter list supplied by the calling function.

Your epilog code needs to ensure that:

- The primary functions of the epilog code have been performed.
- The content of GPR 15, on entry to your epilog code, is preserved.
- If a 64-bit integer value is returned from an AMODE 31 program, the low half of the return value contained in GPR 0 is preserved.

Your prolog and epilog code does not need to perform the following functions:

- Preserve the calling function's floating-point registers.
- Preserve the calling function's vector registers.
- Preserve the high-halves of 64-bit general purpose registers in AMODE 31 functions.
- Preserve the registers used by the compiler generated code.
- Set up the NAB for the called functions.

User reserved DSA space

User reserved DSA space can be enabled by using the compiler option DSAUSER(*value*). If DSAUSER is specified without suboption, a user field with the size of a pointer is reserved on the stack. The user field is a 4-byte field for AMODE 31 and an 8-byte field for AMODE 64. This user field can be utilized by your prolog or epilog code.

If a *value* suboption is specified with DSAUSER, a user field with the size of *value* 32-bit words is allocated. Specifying DSAUSER with a suboption requires ARCH(6). The *value* must be an integer in the range of 0 to 50.

The user field can be located by the HLASM global set symbol &CCN_DSAUSER, which provides the offset to the user field. The compiler allocates the field on the stack only, without initializing it.

The following example shows how &CCN_DSAUSER is set by the compiler:

```
&CCN_DSAUSER SETC '#USER_2-@@AUTO@2'
```

The following example shows how &CCN_DSAUSER can be used in your prolog code:

```
STG 0,&CCN_DSAUSER.(,13)
```

For detailed information about the DSAUSER compiler option, see the topic about DSAUSER and NODSAUSER in *z/OS XL C/C++ User's Guide*.

Compiler-generated global SET symbols

When you supply your prolog and epilog code, the compiler generates the assembly instructions that set up global SET symbols for communicating compiler-collected information to your prolog and epilog code. Your prolog and epilog code can use this information to determine the code sequence generated by your macros.

Table 2 on page 14 describes global SET symbols defined by the compiler.

Table 2. Compiler-generated global SET symbols			
Global SET symbol	Туре	Description	
&CCN_DSASZ	Arithmeti c	The size of the dynamic storage area for the function.	
&CCN_SASZ	Arithmeti	The size of the function save area:	
	С	• 72 = standard format	
		• 144 = F4SA format	
		• 216 = F7SA format	
&CCN_ARGS	Arithmeti c	The number of fixed arguments expected by the function.	
&CCN_RLOW	Arithmeti c	The starting register number to be used in the STORE MULTIPLE instruction for saving the registers of callers if the compiler were to generate that instruction itself.	
&CCN_RHIGH	Arithmeti c	The ending register number to be used in the STORE MULTIPLE instruction for saving the registers of callers.	
&CCN_LP64	Logical	Set to "1" if the LP64 compiler option is specified.	
&CCN_NAB	Logical	Set to "1" when there are called programs that depend on the dynamic storage to be pre-allocated. In this case, the prolog code needs to add a generous amount to the size set in &CCN_DSASZ when the dynamic storage is obtained.	
&CCN_ALTGPR(16)	Logical	The array representing the general purpose registers. Subscript 1 represents GPR 0 and subscript 16 represents GPR 15. A subscript is set to "1" whenever the corresponding register is altered by the compiler-generated code.	
&CCN_STATIC	Logical	Set to "1" if the function is static.	
&CCN_MAIN	Logical	Set to "1" if this is function "main".	
&CCN_RENT	Logical	Set to "1" if the RENT compiler option is specified.	
&CCN_PRCN	Character	The symbol representing the function.	
&CCN_CSECT	Character	The symbol representing the CSECT in effect.	

Table 2. Compiler-genera	ted global SE	T symbols (continued)	
Global SET symbol	Туре	Description	
&CCN_DSAUSER	Character	The assembly time computed offset to the user field on the stack of the function.	
&CCN_LITN	Character	The symbol representing the LTORG generated by the compiler.	
&CCN_BEGIN	Character	The symbol representing the first executable instruction of the function generated by the compiler.	
&CCN_ARCHLVL	Character	The symbol representing the architecture level specified in the ARCH option.	
&CCN_ASCM	Character	The ASC mode of the function:	
		• A=AR mode	
		P=Primary mode	
		For information about AR mode, see <u>"AR-mode programming support"</u> on page 32.	
&CCN_NAB_OFFSET	Character	The assembly time computed offset to the NAB pointer on the stack of the function.	
		The following example shows how &CCN_NAB_OFFSET is set by the compiler:	
		&CCN_NAB_OFFSET SETC'#NAB_2-@@AUTO@2'	
		The following example shows how &CCN_NAB_OFFSET can be used in the prolog code:	
		STG 0,&CCN_NAB_OFFSET.(,13)	
&CCN_IASM_MACRO Character		The name of the in-stream macro that contains all the #pragma insert_asm supplied statements. The setting of &CCN_IASM_MACRO only happens in the presence of inserted assembler statements provided by #pragma insert_asm directives. In the presence of such directives, the compiler generates an in-stream HLASM MACRO like this:	
		MACRO @@IASM@ *from #pragma insert_asm #1 000004 *from #pragma insert_asm #2 000006 *from #pragma insert_asm #3 000008 MEND	
		The following example shows how &CCN_IASM_MACRO is set by the compiler:	
		&CCN_IASM_MACRO SETC '@@IASM@'	
		The MACRO name in &CCN_IASM_MACRO can be placed anywhere within the prolog/epilog code.	
&CCN_PRCN_LONG	Character	The actual function name up to the 1024 character HLASM limit. The setting of &CCN_PRCN_LONG is subject to the HLASM limit of 1024 characters on a SETC instruction. When the function name is longer than 1024 characters, the character value set will be truncated to 1021 characters and appended with ''.	

<u>Table 3 on page 16</u> describes the global SET symbols that can be set by your prolog and epilog code to conditionally enable or disable code sequences generated by the compiler.

Table 3. User modifiable global SET symbols			
Global SET symbol	Туре	Default	Description
&CCN_SASIG	Logical	1	Set to "1" to enable the save area signature generation. Set to "0" to disable the save area signature generation.
&CCN_NAB_STORED Logic		Logical 0	Set to "1" to indicate that NAB pointer storing code was done in the prolog code. The following example shows the code that is generated by the compiler to cause the NAB computing and storing code to be conditionally assembled based on the setting of &CCN_NAB_STORED:
			AIF (&CCN_NAB_STORED).@@NONAB2
&CCN_IASM_FRONT	Logical	0	Set to "1" to indicate that &CCN_IASM_MACRO was already called. The following example shows the code that is generated by the compiler to cause the &CCN_IASM_MACRO to be conditionally assembled based on the setting of &CCN_IASM_STORE: AIF (&CCN_IASM_FRONT).@@NOIASM1 @@IASM@
			.@@NOIASM1 ANOP
&CCN_WSA_INIT	Character	'CCNZWSAI' for 31-bit 'CCNZQWSI' for 64-bit	Function name for WSA initialization routine.
&CCN_WSA_TERM	Character	'CCNZWSAT' for 31-bit 'CCNZQWST ' for 64-bit	Function name for WSA termination routine.
&CCN_APARSE	Logical	1	Set to "1" to trigger CCNZINIT call to parse argc and argv.
			Set to "0" to disable argc and argv parsing.

SCCNSAM(CCNZGBL) macro

Sample macros for prolog and epilog code are supplied in the SCCNSAM data set. The SCCNSAM(CCNZGBL) macro contains assembler instructions to declare all the Global Set Symbols to be referenced. You need to copy the CCNZGBL macro into your prolog and epilog code. Figure 9 on page 16 shows the sample CCNZGBL macro.

Figure 9. SCCNSAM(CCNZGBL)

```
GBLA &CCN_SASZ Save area size of this function
GBLA &CCN_ARGS Number of fixed parameters
GBLA &CCN_RLOW 1st GPR on STM/STMG in prolog GBLA &CCN_RHIGH 2nd GPR on STM/STMG in prolog
GBLB &CCN_MAIN True if function is main GBLB &CCN_LP64 True if compiled with LP64
GBLB &CCN_NAB True if NAB needed
.* &CCN_NAB is to indicate if there are called functions that depend on .* stack space being pre-allocated. When &CCN_NAB is true you'll need
.* to add a generous amount to the size set in &CCN_DSASZ when you
  * otbain the stack space.
GBLB &CCN ALTGPR(16) Altered GPRs by the function
GBLB &CCN_SASIG True to gen savearea signature GBLC &CCN_PRCN Entry symbol of the function GBLC &CCN_CSECT CSECT name of the file
GBLC &CCN_LITN Symbol name for LTORG
GBLC &CCN_BEGIN Symbol name for function body
GBLC &CCN_ARCHLVL n in ARCH(n) option
GBLC &CCN_ASCM A=AR mode P=Primary mode
GBLC &CCN_IASM_MACRO MACRO name for all insert_asm
GBLB &CCN_IASM_FRONT True if insert_asm at front
GBLC &CCN_NAB_OFFSET Offset_to NAB pointer in DSA
GBLC &CCN_NAB_STORED True if NAB pointer stored GBLC &CCN_PRCN_LONG Full function is static
GBLB &CCN_RENT True if compiled with RENT
GBLC &CCN_WSA_INIT WSA initialization function name
GBLC &CCN_WSA_TERM WSA termination function name
GBLB &CCN_APARSE True to parse OS PARM
GBLC &CCN_DSAUSER Offset to user field in DSA
```

SCCNSAM(MYPROLOG) macro

Sample macros for prolog code are supplied in the SCCNSAM data set. Figure 10 on page 17 shows the sample prolog code.

```
MACRO
&NAME
           MYPROLOG
           COPY CCNZGBL
LARL 15,&CCN_LITN
           USING &CCN_LITN,15
           GBLA &MY_DSASZ
&MY_DSASZ SETA 0
           AIF
                  (&CCN_LP64).LP64_1
                  14,12,12(13)
.NEXT_1
           STM
           AGO
.LP64 1
           ANOP
           STMG
                  14,12,8(13)
.NEXT_1
           ANOP
                  (NOT &CCN_RENT).SKIP_R1 (&CCN_LP64).LP64_11
           AIF
           AIF
           LR
                  2,0
           AG0
                  .SKIP_R1
.LP64_11 ANOP
           LGR
                  2,0
.SKIP_R1 ANOP
                   (&CCN_DSASZ LE 0).DROP
           AIF
&MY_DSASZ SETA &CCN_DSASZ
AIF (&CCN_DSASZ GT 32767).USELIT
                  (&CCN_LP64).LP64_2
0,&CCN_DSASZ
           AIF
           LHI
           AG0
                  .NEXT_2
.LP64 2
           ANOP
                  0,&CCN_DSASZ
.NEXT_2
           LGHI
           AGO
.USELIT
           ANOP
           AIF
                   (&CCN_LP64).LP64_3
                  0,=F'&CCN_DSASZ
           AG<sub>0</sub>
                  .NEXT_2
.LP64_3
           ANOP
                  0,=F'&CCN_DSASZ'
           LGF
```

SCCNSAM(MYPROLOG) (Part 1 of 2)

Figure 10. SCCNSAM(MYPROLOG)

```
.NEXT_2 AIF
                (NOT &CCN_NAB).GETDSA
&MY_DSASZ SETA &MY_DSASZ+1048576
                1,1
1,20
         LA
          SLL
                (&CCN_LP64).LP64_4
          AIF
          AR
                0,1
                .GETDSA
          AGO
.LP64_4
         ANOP
          AGR
                0,1
.GETDSA ANOP
          STORAGE OBTAIN, LENGTH=(0), BNDRY=PAGE
                (&CCN_LP64).LP64_5
          AIF
                15,1
15,8(,13)
1,24(,13)
13,4(,15)
         LR
          ST
          ST
          LR
                13,15
          AG0
                .CHECK_R
.LP64_5
         ANOP
                15,1
15,136(,13)
          LGR
          STG
          LG
                1,32(,13)
                13,128(,15)
          STG
          LGR
                13,15
.CHECK_R ANOP
          AIF
AIF
                (NOT &CCN_RENT).DROP
                (&CCN_LP64).LP64_12
                0,2
.DROP
          LR
          AG0
.LP64_12 ANOP
          LGR
                0,2
.DROP
          ANOP
          DROP
                15
         MEND
```

SCCNSAM(MYPROLOG) (Part 2 of 2)

SCCNSAM(MYEPILOG) macro

Sample macros for epilog code are supplied in the SCCNSAM data set. Figure 11 on page 19 shows the sample epilog code.

```
MACRO
&NAME
         MYEPILOG
         COPY
GBLA
               CCNZGBL
               &MY_DSASZ
                (&MY_DSASZ EQ 0).NODSA
         AIF
         AIF
                (&CCN_LP64).LP64_1
         LR
               1.13
               .NEXT_1
         AGO
.LP64_1
         ANOP
         LGR
               1,13
.NEXT_1
         ANOP
                (&CCN_LP64).LP64_2
         AIF
               13,4(,13)
         AGO
               .NEXT_2
.LP64_2
         ANOP
         LG
               13,128(,13)
         ANOP
.NEXT_2
                (&CCN_LP64).LP64_3
         AIF
               15,16(,13)
         ST
               .NEXT_3
         AGO
.LP64 3
         ANOP
               15,16(,13)
         STG
         ANOP
.NEXT_3
         LARL
               15, &CCN_LITN
         USING &CCN LITN, 15
         STORAGE RELEASE, LENGTH=&MY_DSASZ, ADDR=(1)
         DROP
                (&CCN_LP64).LP64_4
         AIF
         L
               15,16(,13)
         AGO
               .NEXT_4
.LP64 4
         ANOP
         I G
               15,16(,13)
.NEXT_4
         ANOP
.NODSA
         ANOP
         AIF
               (&CCN LP64).LP64 5
               14,12(,13)
         LM
               1,12,24(13)
         AGO
               .NEXT_5
.LP64_5
         ANOP
         LG
               14,8(,13)
               1,12,32(13)
         I MG
.NEXT_5
         ANOP
         BR
         MEND
```

Figure 11. SCCNSAM(MYEPILOG)

Compiler-generated default prolog and epilog code

The default prolog and epilog code generated for the "main" function is very much the same as the code produced by the sample prolog and epilog macros in Figure 10 on page 17 and Figure 11 on page 19. That is, a STORAGE macro is used to obtain and release a dynamic storage area of 1 MB. For functions other than "main", the prolog code simply picks up its DSA pointer (the NAB pointer) from the "Address of next save area" field in the calling function's save area.

Supplying your own HLASM statements

Before you insert your own HLASM statements into your C source file, be aware of the following information:

- The compiler does not recognize either the syntax or the semantics of the HLASM statements embedded in the C __asm statement. You need to ensure that the embedded HLASM statements:
 - Meet the requirements of the assembly step that follows the compilation step.
 - Function correctly when embedded in the compiler-generated HLASM source file.
- In the HLASM syntax, the first field is the label field, followed by the op-code, and the rest of the HLASM instruction. If there is no label field, you must leave a blank space at the beginning of the string. Other than this, you can code the rest of the HLASM instruction as you do in HLASM.
- You do not have to consider HLASM line-width requirements. You can code an instruction in the code format string continuously, in accordance with the limitation of the C source file. The C compiler

breaks up a code format string that exceeds 71 characters in the HLASM output, inserting continuation characters as required.

Inserting HLASM instructions into the generated source code

You can use the __asm language extension to specify assembly instructions to be embedded within the generated HLASM source code. For example, you can embed assembly statements that invoke assembler macros to obtain system services.

Use the __asm statement only to embed a short sequence of assembler instructions into a C function, to perform actions that cannot be done using C statements. If you need to use a long routine, put the assembly statements into a source file, assemble it separately, and then call the routine from the C program.

Note: The compiler supports a collection of hardware built-in functions, such as __csg. These hardware built-in functions allow the compiler more freedom in blending embedded assembly statements with the rest of the code. For this reason, a hardware built-in function might be better than an __asm statement for embedding the assembly instructions that you need.

In addition to the __asm language extension, there are language constructs for the following purposes:

- Reserving a register for a global variable of the pointer type. See <u>"Reserving a register for a global</u> variable" on page 27.
- Invoking a macro in the list form. See "Specifying and using the list form of a macro" on page 26.
- Supplying your own function prologs and epilogs. See "Prolog and epilog code" on page 12.

For information about hardware built-in functions, see <u>Using hardware built-in functions</u> in z/OS XL C/C++ Programming Guide.

Using the __asm statement

For the complete $_$ asm statement syntax, see $\underline{Inline assembly statements (IBM extension)}$ in $\underline{z/OS \ XL}$ $\underline{C/C++ \ Language \ Reference}$.

Within the __asm statement, the *code format string* specifies the assembly statement to be embedded in the compiler-generated HLASM source file. Figure 12 on page 20 provides an example of a simple code format string, enclosed in double quotation marks, in an __asm statement.

```
void foo() {
    __asm ( " AR 1,2" );
}
```

Figure 12. Simple code format string

Treatment of the code format string

The compiler treats the code format string in an __asm statement similarly to the way the printf function treats a format string, with the following exception: Instead of printing out the string during program execution, the compiler inserts it after the generated sequence of assembly statements, before the END statement.

More than one assembler instruction can be put into the code format string. As shown in <u>Figure 13 on page 20</u>, each assembler statement must be separated by the new line character '\n' (like the new line character that is used in a printf format string).

```
void foo() {
    __asm ( " AR 1,2\n AR 1,2" );
}
```

Figure 13. Code format string with two instructions

The example in Figure 13 on page 20 will embed two "AR 1,2" instructions in the HLASM source code. You can make the statement more readable by breaking the string into two. In C, adjacent string literals

are automatically concatenated and treated as one. The sample code in <u>Figure 13 on page 20</u> and <u>Figure 14 on page 21 generate the same output.</u>

Figure 14. Code format string with two instructions, formatted for readability

Notes:

- 1. The character "\n" is still required to delimit statements.
- 2. The second statement also begins with a blank space.

C expressions as __asm operands

You can use substitution specifiers in a code format string just as you can in a printf format string. The substitution specifier tells the compiler to substitute the specified C expression into the corresponding __asm operand when it embeds the assembly statement in the HLASM source code. You must ensure that the substitution converts the code format string into a valid assembler instruction.

Note: In this document, operands used in a code format string are referred to as __asm operands.

An embedded assembly statement can use any C-language expression that is in scope as an __asm operand. The *constraint* tells the compiler what to do with the C expression that follows it.

Substitution of a C variable into an __asm operand

Figure 15 on page 21 shows an __asm statement that substitutes a C variable into an output __asm operand. Figure 16 on page 22 shows those assembly instructions.

```
void foo() {
  int x;
  __asm ( " ST 12,%0\n" : "=m"(x) :: "r12" );
}
```

Figure 15. Substitution of a C variable into an output __asm operand

Notes:

- 1. A colon that marks the beginning of the list of output __asm operands, it follows the code format string.
- 2. The output $_asm$ operand is =m"(x). The constraint m" communicates the syntactic requirement to the compiler:
 - The symbol "=" means the (output) __asm operand will be modified.
 - The letter "m" means that the output __asm operand is a memory operand.
- 3. The C expression is the variable x.
- 4. The compiler does not know that the embedded assembly instruction is ST, nor does it know the HLASM syntactic requirement of the second ST operand.
- 5. The variable x is the first __asm operand in the example, and therefore corresponds to %0 in the code format string.

From the __asm statement used in <u>Figure 15 on page 21</u>, the compiler embeds the instructions shown in Figure 16 on page 22 in the generated HLASM source code.




Figure 16. HLASM source code embedded by the compiler

Notes:

- 1. The LA instruction is inserted by the C compiler as a result of processing the "=m''(x)__asm operand.
- 2. @3x is the HLASM symbol name that the compiler assigned to the local variable x. Local C symbol names are mapped to HLASM symbol names so that each local variable has a unique name in the HLASM source file.
- 3. 0(1) is substituted into "%0", which specified the first __asm operand in the code format string in Figure 15 on page 21 (ST 12,%0).

Substitution of a C pointer into an __asm operand

The code format string in Figure 17 on page 22 invokes the WTO macro by using the execute form of the macro with a user-defined buffer.

In general, you do not control which registers are used during the operand substitution, as illustrated in Figure 17 on page 22. For an example that allows you to specify registers, see Figure 21 on page 24.

```
int main() {
    struct WTO_PARM {
        unsigned short len;
        unsigned short code;
        char text[80];
    } wto_buff = { 4+11, 0, "hello world" };

    __asm( " WTO MF=(E,(%0)) " : : "r"(&wto_buff));
    return 0;
}
```

Figure 17. Substitution of a C pointer into an __asm operand

Notes:

- 1. The absence of a label necessitates that a blank space begin the code format string.
- 2. There are no output __asm operands. The end of the output __asm operands list is marked by a colon, which is then followed by a comma-separated list of input __asm operands. The colon starting the list of input __asm operands is not necessary if there are no input operands (which is the case in Figure 15 on page 21).
- 3. The input __asm operand consists of two components:
 - A constraint "r" that tells the compiler that the operand will be stored in a GPR.
 - An expression (&wto_buff) that states that the operand is the address of the message text in the C structure wto_buff.

Definition of multiple __asm operands

In Figure 18 on page 23, the compiler is instructed to store the third defined C variable (z) in a register, and then substitute that register into the third __asm operand %2.

```
void foo() {
   int x, y, z;
   int x, y, z;
   __asm ( " ST 12,%0\n"
        " ST 12,%1\n"
        " AR 12,%2" : "=m"(x), "=m"(y) : "r"(z) : "r12" );
}
```

Figure 18. __asm operand lists

Notes:

- 1. The code format string instructs the compiler to embed an assembly statement that substitutes the register (with contents of the C variable z) into the third __asm operand (%2).
- 2. The constraint "=m" instructs the compiler to use memory operands for the output variables x and y.
- 3. The constraint "r" instructs the compiler to use a register for the input variable z.

Figure 19 on page 23 shows the compiler-generated HLASM code from the __asm statement in Figure 18 on page 23. GPR 4 is assigned to the variable z.

```
L 4,05z 1

LA 2,04y 2

LA 1,03x

ST 12,0(1) 3

ST 12,0(2)

AR 12,4
```

Figure 19. Compiler-generated HLASM code from the __asm statement

Notes:

- 1. The first assembly statement L 4,@5z is added by the compiler to get z into the form specified by the input __asm operand constraint "r".
- 2. The next two instructions are added by the compiler to get the variables x and y into the form specified by the output __asm operand constraints "=m".
- 3. The contents of the code format string are appended in the last three instructions.

Register specification

In general you do not have control over which registers are used during operand substitutions. The register assignment might change when you use different options or optimization levels, or when the surrounding C code is changed.

In cases where you specify explicit registers to be used in the embedded instructions, you should code a clobber list, as shown in Figure 21 on page 24. Without the clobber list, the __asm statement embeds incorrect assembly statements, as shown in Figure 20 on page 23.

Figure 20. Unsuccessful attempt to specify registers

Note: The output and input __asm operand lists are positional. If there are no output __asm operands, the colons separating the output and input operand list are still needed. Because the compiler has no knowledge of assembly instructions and does not understand the LR instruction, it does not know that the registers GPR 0 and GPR 1 are being used in the statement. Any connection between the __asm statement and the rest of the C code must be specified via the __asm operand lists. The information provided in the lists should prevent the compiler from incorrectly moving the other references surrounding the __asm statement. In this example, because the compiler doesn't know that GPR 0 and GPR 1 are being used, it will embed incorrect assembly statements.

To prevent the compiler from incorrectly moving the other references surrounding the __asm statement, add a clobber list after a colon that follows the input __asm operands, as shown in Figure 21 on page 24.

Note: Do not try to use the __asm statement to embed a long piece of assembly code with many operand specifiers and stringent register requirements. There is a limited number of registers available for the compiler to use in the operand specifiers, and in the surrounding code generation. If too many registers are clobbered, there may not be enough registers left for the __asm statement. The same applies if there are too many specifiers.

Figure 21. Register specification with clobbers

Notes:

- 1. This colon is not needed if there is no clobber list.
- 2. The clobber list specifies the registers that can be modified by the assembly instructions.

C expressions as read-write __asm operands

If you use the same __asm operand for both input and output, you must take care that you tell the compiler that the input __asm operand refers to the same variable as the corresponding output __asm operand. For example, the code format string in Figure 22 on page 24 uses one register to store a single __asm operand that is used for both input and output.

Definition of __asm operands for both input and output via an operand list

This topic describes how to use a code format string to define __asm operands that can be used for both input and output.

You can use either input and output operand strings both incorrectly (Figure 22 on page 24) and correctly (Figure 24 on page 25). The code in Figure 22 on page 24 is incorrect because the AR statement reads the first operand and then modifies it, but the = r constraint specifies the output aspect only.

```
__asm ( " AR %0,%1" : "=r"(x) : "r"(y) ); 1
```

Figure 22. Incorrect __asm operand definition for both input and output

Note: No input operand is specified for variable x. The compiler will not know that input and output are stored in the same variable.

The compiler-generated HLASM source code in <u>Figure 23 on page 24</u> is the result of the incorrect definition in Figure 22 on page 24.

```
L 2,@4y 1
LA 1,@3x
AR 4,2
ST 4,0(,1)
```

Figure 23. Incorrect compiler-generated HLASM source code from the incorrect __asm operand definition for both input and output

Note: GPR 4, which is meant for input as well as output, is not loaded from variable x before the code format string is embedded because the code format string in <u>Figure 22 on page 24</u> specified variable x as an output operand only.

If a code format string uses a single __asm operand for both input and output, you must ensure that the embedded assembly statements will perform both of the following tasks:

- Define the variable as an input operand as well as an output operand.
- Define both an input operand and an output operand that refers to the same variable. The variable name is not sufficient for this purpose. See Figure 24 on page 25.

Figure 24 on page 25 shows the code format string that will embed the correct assembler statements (as shown in Figure 25 on page 25).

```
__asm ( " AR \%0,\%1" : "=r"(x) : "r"(y), "0"(x) );
```

Figure 24. Successful definition of an __asm operand for both input and output

Notes:

- 1. %0 is the first operand in the code format string.
- 2. This example has one output $_$ asm operand, "=r"(x).
- 3. Within the input $_asm$ operand list "r"(y), "0"(x), the $_asm$ operands are separated by a comma.
- 4. An input operand "0" (x) is added to the input field. The constraint of this __asm operand is the ("0"), which tells the compiler that:
 - This input __asm operand is the same as the output __asm operand %0. (A numeral zero in the constraint ("0") refers to %0; a numeral one in a constraint would refer to %1; and so on.)
 - The register needs to be loaded with variable x, as shown in Figure 25 on page 25, before the code format string is embedded in the HLASM output.

The compiler-generated HLASM source code in <u>Figure 25 on page 25</u> is the result of the correct definition in Figure 24 on page 25.

```
L 2,04y
L 4,03x 1
LA 1,03x
AR 4,2
ST 4,0(,1)
```

Figure 25. Correct compiler-generated HLASM source code from the correct __asm operand definition for both input and output

Note: The compiler inserted L 4,@3x at the beginning of the instruction sequence because the code format string in Figure 24 on page 25 included both the output operand "=r"(x) and the input operand "0"(x). Together, these statements tell the compiler that the register for the first operand %0 will be used for variable x, which has a value that can be either an input or an output operand.

Definition of an __asm operand for both input and output via the "+" constraint

You can also use the "+" constraint to specify that an __asm operand is used for both input and output.

In <u>Figure 26 on page 25</u>, the "+" constraint is used to define that the variable x is used both as input and output.

```
__asm ( " AR %0,%1" : "+r"(x) : "r"(y));
```

Note: This example is parsed as though the operand list in Figure 24 on page 25 is given.

Figure 26. The + constraint to define an __asm operand for both input and output

Note that an operand can be matched only once. When you use the "+" constraint to implicitly define matching input and output asm operands, do not explicitly define a corresponding asm operand.

<u>Figure 27 on page 26</u> shows an erroneous example of an __asm operand that is defined both implicitly and explicitly. The notes identify the unnecessary code.

```
__asm ( " AR \%0,\%1" : "+r"(x) : "r"(y), "0"(x));
```

Notes:

- 1. %0 is the first operand in the code format string.
- 2. This example has one output $_$ asm operand, "+r"(x). The "+" constraint implicitly defines a matching input $_$ asm operand.
- 3. You do not have to define __asm operand "0"(x) explicitly.

Figure 27. Error: Redundant definition of an asm operand

Specifying and using the list form of a macro

When you specify and use the list form of a macro, you can code for reentrancy by embedding assembly statements that:

- 1. Allocate space on the stack (that is, use a local variable). See Figure 29 on page 27.
- 2. Copy the parameter field values from the list form to this allocated space.
- 3. Invoke the execute form of the macro that will use the allocated space.

Note: The code format string in Figure 17 on page 22 invokes the WTO macro by using the execute form of the macro with a user-defined buffer. That example does allow for reentrancy.

You should not have direct reference to symbols within your code format string as the addressability is not guaranteed. The proper way to use the macro is shown in <u>Figure 29 on page 27</u>, in which all <u>_asm</u> statements are connected through the C variable operands listmsg1 and buff.

<u>Figure 28 on page 26</u> provides an example that uses the list form of a macro without considering reentrancy.

```
1
__asm(" WTO 'hello world', MF=L" : "DS"(listmsg1));
int main() {
    __asm( " WTO MF=(E,(%0)) " : : "r"(&listmsg1));
    return 0;
}
```

Notes:

- 1. The first __asm statement invokes the macro WTO in the list form (MF=L). In order for the list form of the macro to be invoked with the values of the parameter fields defined, the __asm statement must be specified in the global scope.
- 2. The message text "hello world" is provided as a macro parameter.
- 3. The "DS" constraint indicates that this is a data definition, with the name of the C variable defined as the variable listmsg1. Because listmsg1 is implicitly defined as a structure, it can be referenced in subsequent __asm statements, therefore the "DS" constraint must be specified in the output operand list. By default, the compiler allocates 256 bytes of memory for the variable listmsg1, which should satisfy most requirements. You can change the memory allocation size (for example, "DS:100" (listmsg1) to allocate 100 bytes). You can allocate more than 256 bytes of space.
- 4. The second $_$ asm statement invokes the macro WTO in the execute form (MF=(E, (%0)). It takes the address of the storage defined in the list form.
- 5. The address of the variable listmsg1 is defined as an input operand that is stored in a register.

Figure 28. Specifying and using the WTO macro (no reentrancy)

Support of reentrancy requirements

If the execute form of the macro needs to change the fields provided in the list form, the assembly statements embedded by the __asm statement in Figure 28 on page 26 will be incorrect when support for reentrancy is required. The proper way to use the macro is shown in Figure 29 on page 27.

Notes:

- 1. The first __asm statement uses the list form of the macro WTO to define the variable listmsg1.
- 2. The second __asm statement, specified within function scope with a "DS" constraint, will allocate stack space for the variable buff but will not actually initialize the parameter values.
- 3. The size of this variable should match that of the corresponding __asm statement in global scope. An assignment copies the actual parameter values from the list form to this buffer.

Figure 29. Support for reentrancy in a code format string

Inserting non-executable HLASM statements into the generated source code

You can use the #pragma insert_asm directive to supply your own non-executable HLASM statements to the generated source code. The primary purpose of this directive is that you can use it to include the DSECT mapping macros that are required by your embedded assembly statements. The syntax is #pragma insert_asm("string").

The #pragma insert_asm directive causes the compiler to insert *string* at an appropriate place in the generated HLASM code. When you use multiple #pragma insert_asm directives, they are placed in the same order as they appear in your C source code.

Note: The #pragma insert_asm directive can be used with a _Pragma operator. If you use the _Pragma operator, you must put a slash ("/") character before the double quotation marks that surround the string literal. For example: _Pragma ("insert_asm(\"MYSTRING\")").

Example: Using the #pragma insert_asm directive to map specific DSECT information

Figure 30 on page 27 uses the #pragma insert_asm directive to get the system CVTUSER field to address your specified CVT extension data. Because the CVTPTR and CVTUSER fields are defined in the CVT mapping macro, you can use the #pragma insert_asm directive to map specific DSECT information.

Figure 30. Code that supplies specific DSECT mapping macros

Reserving a register for a global variable

The *register* storage class specifier is the C-language extension that allows you to specify, for the entire compilation unit, a general purpose register (GPR) for a global variable, as shown in <u>Figure 31 on page 28</u>.

When you use a code format string to specify a GPR for a global variable, be aware that:

- Only GPR 0 through GPR 15 can be specified for storage of a global variable.
- The variable must be declared as a pointer type.
- A declaration with register specifier cannot have an initializer.

For more information, see The register storage class specifier in z/OS XL C/C++ Language Reference.



Notes:

- 1. The variable declaration int * p defines the variable as a pointer type.
- 2. The register "r5" is not initialized.

Figure 31. Register specification

AMODE-switching support

Within a Metal C application, AMODE 31 and AMODE 64 programs can call each other.

To take advantage of the Metal C AMODE-switching support, be aware of the following information:

- The called and calling programs must be in separate source files. Mixing addressing modes within a single C source file is not supported.
- The save area format for the called program is determined by the AMODE and ASC mode of the called program, that is, 72-byte for AMODE 31 programs, F4SA for AMODE 64 programs, F7SA for AR mode programs. The ability for tracing the save areas chain will be interrupted across AMODE switches.
- The parameter list is prepared according to the AMODE of the called program, that is, 4-byte slots for AMODE 31 programs and 8-byte slots for AMODE64 programs.
- It is the user's responsibility to ensure that all storage addresses passed to the AMODE 31 functions are addressable by the AMODE 31 functions. Because the save area and parameter lists are part of the caller's DSA, the caller must have its DSA allocated in the below-the-bar storage.
- The AMODE of the called program can be specified by the new amode31 and amode64 type attributes. For detailed information, see **amode31 | amode64 type attribute** in <u>z/OS XL C/C++ Language</u> Reference.
- The calling program switches the addressing mode before the call and switches back to its own addressing mode on return from the call.
- The implicit sizes of types long and pointer in the function prototype are determined by the addressing mode of the called program.
- The __ptr64 qualifier can be used to specify a 64-bit pointer on an AMODE 31 program; the pointer cannot be dereferenced at the AMODE 31 program.

Example of an AMODE31 program that calls an AMODE64 program

In <u>Figure 32 on page 29</u>, AMODE 31 program "main" in a31.c makes calls to AMODE 64 programs a64a1 and a64a2 in a64a.c. For the commands that compile and link a31.c and a64a.c, see <u>"Commands</u> that compile and link applications that switch addressing modes" on page 43.

```
a31.c
long a64a1 (long j, int k, short s) __attribute__((amode64));
int a64a2 (long j, int k, short s) __attribute__((amode64));
int main () {
    int a = 40;
    return a64a1(99LL, a, 4) + a64a2(-120LL, -60, -18);
}
a64a.c
long a64a1 (long a, int b, short c) {
    return -(a+b+c);
}
int a64a2 (long a, int b, short c) {
    return -(a+b+c);
}
```

Figure 32. AMODE31 program that calls an AMODE64 program

RENT mode support

The RENT option supports constructed reentrancy for C programs with writable static and external variables. This makes Metal C programs with writable static and external variables to be reentrant so a program can be concurrently used by multiple users. The writable static area (WSA) can be managed by user provided routines. Using the RENT support, you can use Metal C as an alternative to assembler, to write programs to run in CICS® environment. For information about how the CICS API and the CICS XPI can be used in Metal C and for programming examples, see Appendix B, "CICS programming interface examples," on page 123. The default of the RENT option is NORENT.

Note: The Metal C RENT support is independent of and different from the NOMETAL RENT support. They should not be mixed.

Example

```
xlc -qMETAL -qRENT -S a.c as -mgoff a.s export _LD_SYSLIB="//'CBC.SCCNOBJ'" 3 ld a.o
```

Notes:

- 1. Request Metal C RENT support.
- 2. The HLASM GOFF option is required to assemble the compiler generated code for RENT.
- 3. It is necessary to add CBC.SCCNOBJ dataset to the binder SYSLIB for the resolution of CCNZINIT and CCNZTERM.

Linkage convention

General Purpose Register 0 (GPR0) is used to pass the WSA address. The prolog code you supplied needs to preserve the content of GPR0 on exit of the prolog code. Programs compiled with RENT and NORENT can be mixed as long as the NORENT programs do not call RENT programs.

Note: Global variables compiled with RENT and NORENT cannot have the same name.

Assembler code interface

The runtime RENT support is accomplished by additional calls generated for the function "main" between the prolog/epilog code and the function code. The RENT environment initialization and termination routines are called to establish and terminate the dynamically allocated WSA storage with the static initialization data applied. For the AMODE 31 "main" function, CCNZINIT and CCNZTERM are the names of these routines. While for the AMODE 64 "main" function, CCNZQINI and CCNZQTRM are the function names. For the simplicity of further references, only the names of the 31-bit version are used.

The actual WSA storage management is done by user supplied plug-in routines called from CCNZINIT and CCNZTERM. Two user modifiable Global Set Symbols, &CCN_WSA_INIT and &CCN_WSA_TERM, can be used in the user supplied prolog code to set the user supplied WSA initialization and termination function names. The AMODE of the user supplied routines has to be the same as the AMODE of function "main".

Note: CCNZINIT, CCNZTERM, CCNZWSAI and CCNZWSAT require the stack space to be supplied by function "main" prolog code. Both CCNZINIT and CCNZTERM require NAB to be established by function "main". Also, CCNZINIT and CCNZTERM assume stack space to be available for the WSA initialization and termination functions. This arrangement is to ensure that the stack space used by CCNZINIT and CCNZTERM as well as the WSA initialization and termination routines is consistent with the stack space used by function "main". Allocating 1K of extra stack space (in addition to the DSA size suggested by &CCN_DSASZ for "main") by function "main" should be sufficient for AMODE 31. For AMODE 64, the extra stack space is roughly doubled.

The following new Global Set Symbols are introduced for the RENT option.

- &CCN_MAIN
- &CCN RENT
- &CCN_WSA_INIT
- &CCN_WSA_TERM

For detailed information about these new Global Set Symbols, see <u>"Compiler-generated global SET symbols"</u> on page 14.

You can provide your own WSA initialization and termination routines by setting these Global Set Symbols with the module names of your own routines. For example:

```
GBLC &CCN_WSA_INIT
GBLC &CCN_WSA_TERM
&CCN_WSA_INIT SETC 'MYWSAI'
&CCN_WSA_TERM SETC 'MYWSAT'
```

Your own WSA initialization and termination routines can be object modules, load modules, or program modules, and they need to be supplied to the binder's input.

The compiler generated code for "main" has the following kind of assembly statements in it:

• For AMODE 31:

```
DC V(&CCN_WSA_INIT)
DC V(&CCN_WSA_TERM)
```

• For AMODE 64:

```
DC VD(&CCN_WSA_INIT)
DC VD(&CCN_WSA_TERM)
```

WSA initialization routine

Given the size of the WSA for the whole application and the image of the WSA with initialization data applied, the WSA initialization routine you provided dynamically allocate the WSA storage for the application and copy the WSA image into it. The address of the allocated storage is returned which CCNZINIT saves it on the function main's stack to be propagated to the rest of the application. You are responsible for ensuring that the allocated storage is addressable to all parts of the application. This particularly means if there are AMODE 31 parts in the application, the WSA storage should not be allocated above the 2G bar if the AMODE 31 parts need to access it. Also, the WSA storage has to be allocated in the primary address space. WSA storage in data spaces is not supported.

The routine you provide is given an address of an area to store whatever extra information you want to keep and pass to the WSA termination routine you provided. The storage area size is the size of a pointer, that is, 4 bytes for AMODE 31, and 8 bytes for AMODE 64.

Function prototype:

```
typedef void * (init_func_t) (void * wsa_image_addr,
unsigned long wsa_size, void * *user_info_addr, unsigned int alignment);
```

Input parameters:

- wsa_image_addr the address of the WSA image in the loaded program object
- wsa_size the total size of the application's WSA
- user_info_addr the address of the CCNZINIT provided save area for saving user information
- alignment the minimum required alignment of the allocated WSA storage. For example, "alignment=8" means double-word alignment.

Return value:

The address of the allocated and initialized WSA storage. The default is the IBM supplied routine CCNZWSAI or CCNZQWSI, which allocates storage for both AMODE 31 and AMODE 64 with the following macro:

```
STORAGE OBTAIN, LENGTH=(n), BNDRY=PAGE
```

WSA termination routine

This routine is called from CCNZTERM for the WSA termination and cleanup process. It is passed in the address of the WSA storage allocated by the WSA initialization routine. It is also given the same WSA size that was originally passed to the WSA initialization routine.

Function prototype:

```
typedef void (term_func_t) (void * allocated_wsa_addr,
unsigned long wsa_size, void * user_info_addr);
```

Input parameters:

- allocated wsa addr the address of the allocated WSA storage
- wsa_size the total size of the application's WSA
- user_info_addr the saved user information

Return value:

The default is the IBM supplied routine CCNZWSAT or CCNZQWST, which frees the storage with the following macro:

```
STORAGE RELEASE, LENGTH=(n), ADDR=(m)
```

argc argv parsing support

If your main() function uses the standard argc and argv arguments, the Metal C initialization routine is called to parse the raw parameter data received from the hosting environment and to convert the parameter to the standard argc and argv format. If your program is not invoked in or otherwise connected (not dubbed) to the z/OS UNIX System Services (z/OS UNIX) environment, you can use the ARGPARSE or NOARGPARSE options to determine if the EXEC PARM needs to be further parsed into individual arguments; the EXEC PARM must be in this format: a halfword length field followed by a maximum of 100 characters where the length field contains a binary count of the number of bytes in the PARM field. For more information about the ARGPARSE option, see z/OS XL C/C++ User's Guide.

If your main() function uses argc and argv arguments and you do not want the parsing to be performed, you can set the new Global Set Symbol &CCN_APARSE to 0 in your prolog code to conditionally bypass the argument parsing. For detailed information, see Table 3 on page 16.

AR-mode programming support

With the METAL option, an AR-mode function can access data stored in data spaces by using the hardware access registers. For more information about AR-mode, see <u>z/OS MVS Programming: Assembler</u> Services Guide. A non-AR-mode function is said to be in *primary mode*.

The following sections describe the compiler options, language constructs, and built-in functions that support AR-mode programming.

AR-mode function declaration

You can declare a function to be an AR-mode function with the armode attribute. The syntax is:

```
void armode_func() __attribute__((armode));
```

You can also use the ARMODE compiler option to declare that all functions in the source program to be AR-mode functions. If you use the ARMODE compiler option and you want to single out the functions in the source program to be primary mode functions you can declare the function with the noarmode attribute. The syntax is:

```
void nonarmode_func() __attribute__((noarmode));
```

Far pointer declaration, reference, and dereference

The ability to reference data stored in different data spaces is achieved through a C language extension to pointer types called far pointer types. A far pointer type is declared by adding the __far qualifier. The syntax is

```
int * __far my_far_pointer;
```

A far pointer can be declared in a function of any mode (AR mode or primary mode). But only an AR-mode function can directly or indirectly dereference a far pointer. In other words, only an AR-mode program can access data stored in data spaces with far pointers.

Note: For an example of a simple dereference of a far pointer, see Figure 39 on page 39.

Regardless of the mode of the function, a far pointer can be manipulated in the following ways:

- It can be passed as a parameter.
- It can be received as a function return value.
- It can be compared with another pointer.
- It can be cast as another pointer type.
- It can be used in pointer arithmetic expressions.

A far pointer consists of ALET and an offset. Although an ALET is always 32 bits in length, the size of a far pointer is twice the size of a regular pointer. The layout of a far pointer in memory depends on the AMODE of the function:

- Under AMODE 31, a far pointer occupies eight bytes.
 - The ALET occupies the first four bytes.
 - The offset occupies the last four bytes.
- Under AMODE 64, a far pointer occupies 16 bytes.
 - The first four bytes are unused.
 - The ALET occupies the second four bytes.
 - The offset occupies the last eight bytes.

This difference in pointer size is illustrated in Figure 33 on page 33.

31-bit 64-bit — 4-bytes → ← 4-bytes -8-bytes — 4-bytes — ← 4-bytes alet addr unused alet addr

Figure 33. Far pointer sizes under different addressing modes

C language constructs and far pointers

Table 4 on page 33 describes the effects of language constructs that might have special impact on far pointers.

Table 4. Language constructs that may have special	Table 4. Language constructs that may have special impact on far pointers			
Language Construct	Effect			
Implicit or explicit cast from normal to far pointer	Because the normal pointer is assumed to point to primary address space, the ALET of the far pointer is set to 0.			
Explicit cast from far pointer to normal pointer	The offset of the far pointer is extracted and used to form the normal pointer. Unless the ALET of the far pointer was 0, the normal pointer is likely to be invalid.			
Operators !=, ==	If either operand is a far pointer, the other operand is implicitly cast to a far pointer before the operands are compared. The comparison is performed on both the ALET and offset components of a far pointer.			
Operators <, <=, >, >=	Only the offset of the far pointer is used in the comparison. Unless the ALETs of the far pointers were the same, the result might be meaningless.			
Compare to NULL	Because of the implicit cast of NULL to a far pointer, the != and == operators compare both the ALET and the offset to zero. A test of !(p>NULL) is not sufficient to ensure that the ALET is also 0.			
Pointer arithmetic	The effects of pointer arithmetic are applied to the offset component of a far pointer only. The ALET component remains unchanged.			
Address of Operator, operand of &	The result is a normal pointer, except in the following cases:			
	• If the operand of & is the result of an indirection operator (*), the type of & is the same as the operand of the indirection operator.			
	If the operand of & is the result of the arrow operator (->, structure member access), the type of & is the same as the left operand of the arrow operator.			

Implicit ALET association

In addition to explicitly specifying ALETs that use far pointers to access data in data spaces, the compiler must associate those ALETs with all the memory references contained in the AR-mode function.

In a non-AR-mode function, all variable references are to primary data space (ALET 0). In an AR-mode function, the compiler manages access registers (ARs) so that every memory reference uses an ALET associated with the variable type to reach the appropriate data space. Table 5 on page 34 lists the ALET associations for different types of variables.

Table 5. Implicit ALET associations for AR-mode-function variables		
Variable type	Implied ALET	
File-scope variable	ALET 0 (primary data space)	
Stack variables (function local variable)	The ALET that is in AR 13 at the time of function entry. This points to the stack frame.	
Parameters (function formal parameters)	The ALET that is in AR 1 at the time of function entry. This points to the parameter list.	
Data pointed to by regular pointers	ALET 0 (primary data space).	
Data pointed by far pointer	ALET contained in far pointer.	

Far pointer construction

The Metal C Runtime Library does not provide functions for allocating or deallocating alternative data spaces. You can use the DSPSERV and ALESERV HLASM macros to allocate space and obtain a valid ALET and offset. For an example, see <u>Figure 37 on page 37</u>. For more information, see <u>z/OS MVS Programming:</u> Assembler Services Guide.

Built-in functions that manage far-pointer components

The compiler provides built-in functions for setting and getting the individual components of far pointers. Whenever you use these built-in functions, you must:

- Define the macro _MI.BUILTN to "1".
- · Include the header file builtins.h.

Figure 34 on page 34 lists the constructors.

```
void * __far __set_far_ALET_offset(unsigned int alet, void * offset);
void * __far __set_far_ALET(unsigned int alet, void * __far offset);
void * __far __set_far_offset(void * __far alet, void * offset);
1
```

Notes:

- 1. The __set_far_ALET function does not modify the far-pointer parameter offset. It simply uses it to provide the offset component of the far pointer being constructed. Its return value is the constructed far pointer.
- 2. Similarly, the __set_far_offset function that uses the far-pointer parameter ALET is not modified; it simply provides the ALET for the far pointer being constructed.

Figure 34. Built-in functions for setting far-pointer components

Figure 35 on page 35 lists the extractors.

```
unsigned int __get_far_ALET(void * __far p);
void * __get_far_offset(void * __far p);
```

Figure 35. Built-in functions for getting far-pointer components

For information about ARMODE built-in functions, see <u>Using hardware built-in functions</u> in z/OS XL C/C++ Programming Guide.

Library functions that manipulate data stored in data spaces

The XL C compiler provides far versions of some of the standard C string and memory library functions. The far versions can be called by either AR-mode or primary-mode functions. If these functions are called by an AR mode function, the compiler will generate inline code for them.

Whenever you use these functions, you must:

- Define the macro _MI.BUILTN to "1".
- Include the header file builtins.h.

The semantics of these functions, listed in Figure 36 on page 35, are identical to the standard version.

```
void * __far __far_memcpy(void * __far s1, const void * __far s2, size_t n);
int __far_memcmp(const void * __far s1, const void * __far s2, size_t n);
void * __far __far_memset(void * __far s, int c, size_t n);
void * __far __far_memchr(const void * __far s, int c, size_t n);
char * __far __far_strcpy(char * __far s1, const char * __far s2);
char * __far __far_strcmp(char * __far s1, const char * __far s2, size_t n);
int __far_strcmp(const char * __far s1, const char * __far s2);
int __far_strncmp(const char * __far s1, const char * __far s2, size_t n);
char * __far __far_strcat(char * __far s1, const char * __far s2);
char * __far __far_strncat(char * __far s1, const char * __far s2);
char * __far __far_strncat(char * __far s1, const char * __far s2, size_t n);
char * __far __far_strchr(const char * __far s, int c);
char * __far __far_strlchr(const char * __far s, int c);
size_t __far_strlen(const char * __far s, int c);
```

Note: For an example that illustrates the use of this function, see Figure 38 on page 39.

Figure 36. Library functions for use only in AR-mode functions

AR-mode function linkage conventions

AR mode functions follow the same linkage conventions as do primary-mode functions, with the following additional requirements:

- Any function that calls an AR-mode function must supply the 54-word F7SA save area for saving the access registers.
- The AR-mode function must preserve the calling function's access registers.
- The AR-mode function is responsible for switching into AR mode on entry and switching back to calling function's ASC mode on exit.

Note: A primary-mode function does not switch the ASC mode when calling an AR-mode function.

- An AR-mode function must switch to primary mode before calling a primary mode function.
- A far pointer is passed and returned as a struct that is based on the layout for the calling function's AMODE.

Default prolog and epilog code for AR-mode functions

If the calling function is in non-AR mode, the DSA and parameter areas are assumed to be located in the primary address space.

For AR-mode functions, the default prolog code generates additional instructions that:

- Save the calling function's access registers in the F7SA save area.
- Save the ASC mode of the calling function in the F7SA save area.
- Switch to AR mode.
- Prime AR 1 and AR 13 with LAE instructions.

For AR-mode functions, the default epilog code generates additional instructions that:

- Restore the calling function's access registers.
- Restore the ASC mode of the calling function.

Data space allocation and deallocation

Figure 37 on page 37 provides examples of routines for allocating and deallocating data space.

```
#define MI BUILTN 1
#include builtins.h
#include string.h
/****************
/* Allocation/Deallocation example routines
int alloc_data_space(void * __far *ret, char dstok[8],
                     long size_blocks, char name[8])
 __asm("DSPARMS DSPSERV MF=L\n" : "XL:DS:64"(DSPARMS));
__asm("ALPARMS ALESERV MF=L\n" : "XL:DS:16"(ALPARMS));
  int res,res2;
  struct _myparms
                     /* To reduce number of operands to __asm */
    unsigned origin;
                       /* +0 */
   unsigned blocks; unsigned alet;
                         /* +4 */
                       /* +8 */
   char name[8];
                           /* +12 */
    char dstok[8];
                       /* +20 */
  } myparms;
  strncpy(myparms.name,name,8);
 myparms.blocks = size_blocks;
  __asm(
              DSPSERV CREATE, GENNAME=COND, NAME=12(%1), OUTNAME=12(%1), "
    "STOKEN=20(%1),ORIGIN=0(%1),BLOCKS=(4(%1)),MF=(E,(%2))\n"
" ST 15,%0\n"
    : "=m"(res)
    : "a"(&myparms), "a"(&DSPARMS)
: "r0", "r1", "r14", "r15");
  if(res==0)
    __asm(
                 ALESERV ADD,STOKEN=20(%1),ALET=8(%1),MF=(E,(%2))\n"
ST 15,%0\n"
                ST
      : "=m"(res2) : "a"(&myparms), "a"(&ALPARMS) : "r0" , "r1", "r14", "r15");
    if(res2!=0)
      __asm(
                  DSPSERV DELETE, STOKEN=20(\%1), MF=(E, (\%2)) \n"
                  ST
                           15,%0\n"
        : "=m"(res2) : "a"(&myparms), "a"(&DSPARMS) : "r0" , "r1", "r14", "r15");
      return -res2;
  else
    return res;
              _set_far_ALET_offset(myparms.alet,(void *)myparms.origin);
     strncpy(dstok,myparms.dstok,8);
     strncpy(name, myparms.name, 8);
     return 0;
```

Allocation and deallocation routines (Part 1 of 3)

Figure 37. Allocation and deallocation routines

```
void * __far allocate_far(long size)
  void * __far ret;
  ret = NULL;
  if(size > 0)
    int blocks = (size+4095)/4096;
     char name[8];
    char dstok[8];
                               ",8); /* provide a prefix */
    alloc_data_space(&ret, dstok, blocks, name);
  return ret;
void delete_data_space(void * __far p, char dstok[8])
  __asm("DSPARMS DSPSERV MF=L\n" : "XL:DS:64"(DSPARMS));
__asm("ALPARMS ALESERV MF=L\n" : "XL:DS:16"(ALPARMS));
  int alet;
  if(p!=NULL)
    alet = __get_far_ALET(p);
     __asm(
      " ALESERV DELETE,ALET=0(%0),MF=(E,(%1))\n"
:: "a"(&alet), "a"(&ALPARMS) : "r0" , "r1", "r14", "r15");
     __asm(
       " DSPSERV DELETE,STOKEN=0(%0),MF=(E,(%1))\n"
:: "a"(dstok), "a"(&DSPARMS): "r0", "r1", "r14", "r15");
int get_data_space_token(void * __far p, char *dstok)
    _asm("ALPARMS ALESERV MF=L\n" : "XL:DS:16"(ALPARMS));
  unsigned alet;
  int res;
  if(p!=NULL)
    alet = __get_far_ALET(p);
     __asm(
                    ALESERV EXTRACT, ALET=0(\%1), STOKEN=0(\%2), MF=(E, (\%3)) \n"
       " ST 15,%0\n" : "=m"(res) : "a"(&alet), "a"(dstok), "a"(&ALPARMS) : "r0" , "r1", "r14", "r15");
    return res;
  return -1;
```

Allocation and deallocation routines (Part 2 of 3)

```
void * __far free_far(void * __far p)
{
  int x;
  void * __far ret;

  if(p != NULL)
  {
     char dstok[8];
     x = get_data_space_token(p,dstok);
     if(x==0)
     {
          delete_data_space(p, dstok);
     }
  }
  return NULL;
}
```

Allocation and deallocation routines (Part 3 of 3)

Copying a string pointer to a far pointer

<u>Figure 38 on page 39</u> provides an example of using a built-in function to copy a C string pointer to a far pointer.

Figure 38. Copying a C string pointer to a far pointer

Far pointer dereference

The Metal C Runtime Library does not provide functions for allocating or deallocating alternative data spaces. Figure 39 on page 39 provides an example of code that dereferences a far pointer.

Figure 39. Example of a simple dereference of a far pointer

Metal C function descriptor support

When a library or a set of functions are used by multiple applications, these functions have the same code in all the applications while their associated data is application-specific. In this case, you can use Metal C function descriptors to call these library functions instead of using normal function pointers.

A Metal C function descriptor encapsulates all the information that a function call needs to access both the function and the application-specific data. You can use Metal C function descriptors to point to and call functions with their own set of associated data for the particular program or invocation.

A function pointer that is declared with the __fdptr keyword points to a Metal C function descriptor, which is an internal control block that contains two fields:

- The address of the actual function to be called when the function pointer is dereferenced
- The address of the data location or function environment

The length of each field is the same as that of a pointer in the current compilation's unit AMODE.

Related information

• The __fdptr type qualifier (C only) in z/OS XL C/C++ Language Reference

Defining an alternative name for function "main"

When building a Metal C program, you might need to define an alternative entry point name for function main while maintaining all the characteristics of the function main.

For example, if you want to call your Metal C main function as "ANEWMAIN", you can add the following directive in your source file where main is defined:

```
#pragma map(main, "ANEWMAIN")
void dosomething(char *);
int main(int argc, char *argv[]) {
   int i;
   for (i=1; i<argc; i++) {
      dosomething(argv[i]);
   }
return 0;
}</pre>
```

The entry point name in the generated prolog/epilog code is ANEWMAIN. When you link your program, you need to tell the binder that the entry point name is ANEWMAIN. For example:

```
/bin/ld -o a.out a.o -e ANEWMAIN
```

Notes:

- 1. In your C program, you can have only one main function, whether it is called main or otherwise. If you use IPA, IPA will terminate with an error message issued when more than one main function is detected.
- 2. The mapped entry point name for the function main is subject to the effect of the LONGNAME option. If the NOLONGNAME option is in effect, the mapped name is truncated to a maximum of 8 characters, and the name will be in uppercase, with _ in the name converted to @. For example, a_newmain becomes A@NEWMAI.

Building Metal C programs

Because the Metal option produces the final code in HLASM source code format, the build process needs to include an assembly step to produce the object files. The build process is demonstrated in Figure 40 on page 41. Note that the build process with IPA is more elaborated. For more information, see "Building Metal C programs with IPA" on page 44.

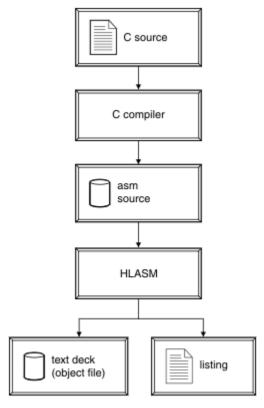


Figure 40. Metal C application build process

In summary, the C source file is sent to the C compiler, which generates the assembler source file. The assembler source file is sent to the HLASM assembler, which generates an object file and a listing.

Examples of building Metal C programs

A set of examples illustrates how to build a Metal C program by using either z/OS UNIX System Services commands or MVS JCL procedures. In these examples:

- MYADD is the name of the entry point in the C program.
- The name of the C source file used to generate the HLASM source file is mycode.c.
- The name of the HLASM source file is mycode.s if it is generated under z/OS UNIX System Services.
- Under MVS, if the C source file is a data set, the compiler uses the C source file name to form the name of the HLASM source file. The high-level qualifier is replaced with the userid under which the compiler is running, and .ASM is appended as the low-level qualifier.

C source file

Figure 41 on page 41 shows a C source file mycode.c that can be used to generate an HLASM source file. The name of the generated HLASM source file is mycode.s under z/OS UNIX System Services.

Figure 41. C source file (mycode.c) that builds a Metal C program

Building Metal C programs using z/OS UNIX System Services

There are three steps for building a Metal C program under z/OS UNIX System Services:

- 1. Use the **xlc** command to generate an HLASM source file.
- 2. Use the **as** command to generate the object file.
- 3. Use the **1d** command to generate the program.

Generating an HLASM source file using the xlc command

To generate an HLASM source file from a C source file, the **xlc** command must be invoked with the -qmetal option and the -S flag.

Notes:

- Without the -S flag, the xlc utility invokes the compiler with the OBJECT option, which is in conflict with the METAL option. This causes the compiler to emit a severe error message and stop processing.
- You must use the header files for the Metal C Runtime Library instead of the header files for the Language Environment® C/C++ Runtime Library, which might have the same file names as the Metal C header files. For detailed information, see Chapter 2, "Header files," on page 51.

The generated HLASM source file has the same name as the C source file with the suffix derived from the ssuffix attribute in the xlc configuration file. The default suffix is s, so in the examples in this section, the HLASM source file name is mycode.s.

```
xlc -S -qmetal mycode.c
```

Figure 42. C compiler invocation to generate mycode.s

Generating an object file from the HLASM source using the z/OS UNIX System Services as command

The generated object file does not have to be a z/OS UNIX file. The **as** command can write the object file directly to an MVS data set, as shown in <u>Figure 43 on page 42</u>. The -o flag can be used to name the output file, where it can be a UNIX file or an MVS data set.

```
as mycode.s
```

Figure 43. Command that invokes HLASM to assemble mycode.s

A successful assemble will produce mycode.o.

If the C source file was compiled with the LONGNAME compiler option, the generated HLASM source file will contain symbols that are more than eight characters in length. In that case, the HLASM GOFF option must be specified. Use the as utility -m flag to specify HLASM options, as shown in Figure 44 on page 42.

```
as -mgoff mycodelong.s
```

Figure 44. Command that compiles an HLASM source file containing symbols longer than eight characters

A successful assemble will produce mycodelong.o.

Creating a program with the z/OS UNIX System Services ld command

Use the **1d** command to link the object file produced by the **as** command into a program. The program does not have to be a z/OS UNIX file. The ld utility can write the program directly to a specified MVS data set.

Common 1d command options that control the bind step are:

- -e to specify the entry point.
- -o to specify the name of the program created by the ld utility.
- -V to direct the binder listing to stdout.
- -b to specify other binder-specific options.

Note: If you compile your C source file with the LONGNAME option, you should use **-b case=mixed** and the **-e** option must specify the entry point in its original case, as shown in Figure 45 on page 43.

```
ld -b case=mixed -e MYADD -o "//LOAD(mycode)" mycode.o
```

Figure 45. Command that binds mycode.o and produces a Metal C program in an MVS data set

A successful bind produces HLQ.LOAD(MYCODE) with entry point MYADD.

Commands that compile and link applications that switch addressing modes

Figure 46 on page 43 shows the commands that compile and link the programs in Figure 32 on page 29.

```
xlc -S -qmetal a31.c
xlc -S -qmetal -q64 a64a.c
as -a=a31.lst -mgoff a31.s
as -a=a64a.lst -mgoff a64a.s
ld -o a.out a31.o a64a.o -e MAIN
```

Figure 46. Commands that compile and link programs with different addressing modes

Notes:

- 1. To generate an HLASM source file from a C source file, the **xlc** command must be invoked with the -gmetal option and the -S flag.
- 2. The called program a64a.c is an external function in a separate source file.
- 3. The **-mgoff** command is used to compile an HLASM source file containing symbols longer than eight characters.
- 4. The **1d** command links the object file produced by the **as** command into a program. The **-e** command specifies the entry point.

Building Metal C programs using JCL

When you build Metal C programs using JCL, you cannot use standard JCL procedures that combine the compilation step with the link step (or link and run steps) because compiling Metal C programs produces HLASM source files that must be assembled by HLASM before they can be linked.

After successful completion of the assembly step, you can use an appropriate <u>binder invocation JCL procedure</u> to produce an program.

Note: Binder invocation JCL procedures are available in the CEE.SCEEPROC data set.

Compilation of HLQ.SOURCE.C(MYCODE)

Figure 47. Job step that compiles HLQ.SOURCE.C(MYCODE)

Assembly of HLQ.SOURCE.ASM(MYCODE)

Figure 48. Assembly step of HLQ.SOURCE.ASM(MYCODE)

Bind of HLQ.OBJ(MYCODE) into a Metal C program

Figure 49. Job step that binds the generated HLASM object into a program

Notes:

- 1. The program is written to SYSLMOD.
- 2. The entry point can be specified using the ENTRY binder control statement.

Building Metal C programs with IPA

Starting with z/OS V1R13 XL C compiler, the IPA option can be used with the METAL option. IPA is an optimization option that enables the compiler to find more optimization opportunities to improve your application performance. For more information about IPA, see the Using the IPA option section in z/OS XL C/C++ Programming Guide and the IPA considerations section in z/OS XL C/C++ User's Guide.

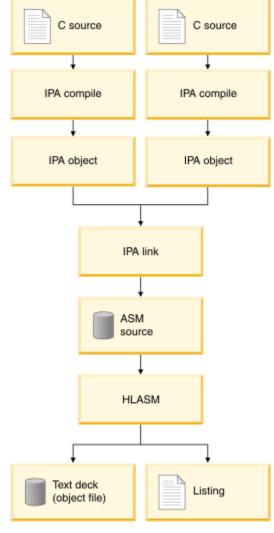


Figure 50. The process of building Metal C programs with IPA

You need to be aware of the following adjustments when invoking IPA for METAL.

- The LONGNAME option is in effect by default when IPA is specified.
- The IPA compile step only produces IPA object in the output file. Only IPA(NOOBJECT) is allowed, which instructs IPA to stop the compile process after the IPA object is produced. It does not produce HLASM source code, so the GENASM option cannot be used.
- The output file from IPA link step is one single HLASM source file for the whole program, and the GENASM option is required. There could be multiple structures in the HLASM source program, one for each partition. Under z/OS UNIX, the output HLASM source file resides in the directory where the IPA link took place. The default output file name for z/OS UNIX is a.s. In BATCH mode, the output HLASM source file goes in the dataset allocated to DD SYSLIN in the IPA link step.
- At the IPA link phase, all external references must be resolved. For Metal C, IPA does not attempt to convert external object modules or load modules into object code for the inclusion in the IPA produced program. You need to provide the same set of library data sets to both IPA link and the binder for symbol resolution.
- If you specify the PROLOG and EPILOG compiler options to supply your own prolog and epilog macros at compile time, the macros will only be applied to the functions defined in the source file.
- If you have #pragma insert_asm in your source file, IPA will assume the strong connection between the string provided by the pragma and the functions in the source file. IPA will not move functions defined in that source file to anywhere else.

- If you use global register variable or the RESERVE_REGS option during your compile, IPA link will merge the registers specified in the compile steps and apply the merged set of the originated compilation units to a partition.
- If you use the DSAUSER option in any of your compile steps, IPA link applies the option to the entire program.

The following compiler options are not supported by METAL with IPA:

- DEBUG
- REPORT

The following IPA suboptions are not supported with the METAL option:

- ATTRIBUTE
- GONUM
- · PDF suboptions

The following IPA control file directives are not supported with the METAL option:

- EXPORT
- NOEXPORTS

Example

The following example shows how to compile a Metal C program with IPA.

IPA compile phase:

```
xlc -qmetal -qipa -c x.c
xlc -qmetal -qipa -c y.c
```

The above commands produce x.o and y.o.

Notes:

- 1. The -c option indicates compile.
- 2. No HLASM output is generated.
- 3. The objects are IPA objects, which can only be used for IPA link.
- 4. LONGNAME is implicitly turned on.

IPA link phase:

```
xlc -qmetal -qipa -S x.o y.o
```

This command produces a.s.

Note: The structure of the compiler-generated HLASM source program is similar to that described in "Structure of a compiler-generated HLASM source program" on page 4, except that at IPA link there could be multiple structures in the HLASM source program, one for each partition.

The rest of the build process is similar to building Metal C programs without IPA. You need to add the assembly step to produce the object file from the IPA link generated HLASM source file. You also need to supply the object file produced by the assembler along with all other library data sets to the binder for producing the final executable program.

Assembly phase:

```
as -mgoff a.s
```

This command produces a.o.

Note: The HLASM GOFF option must be specified because of the LONGNAME compiler option requirement with IPA.

Bind/Link phase:

ld -b case=mixed -e main a.o

This command produces a.out.

Note: Because of the LONGNAME compiler option requirement with IPA, you should use the **-b case=mixed** ld utility option and the **-e** option with the entry point in its original case.

Generation of debugging information

When the NOMETAL (the default) and DEBUG compiler options are in effect, the compiler either generates debugging information as a separate binary file in DWARF format, or embeds debugging information within the object file in ISD format. When the METAL and DEBUG compiler options are specified, debugging information in both ADATA and DWARF format can be generated. The ADATA debug format allows debugging of the generated HLASM source. The DWARF debug format allows debugging of the original C source.

CDAASMC JCL procedure to generate debugging information

The **as** command is a z/OS UNIX System Services utility that invokes the HLASM assembler and can produce debugging information in DWARF format. CDAASMC is the JCL procedure provided with the XL C compiler to do the same thing in a batch environment.

Note: If you wish to use the HLASM ASMLANGX debugging utility, you must first assemble your source with the ADATA assembler option. The CDAASMC JCL procedure allows you to generate both ADATA and DWARF debugging information.

The cataloged CDAASMC JCL procedure invokes CDAHLASM.

Debugging information for the IDF debugger

The Interactive Debug Facility (IDF) is a symbolic debugging tool for assembly language programs. It uses information from the load module file to determine the locations of a program's control sections and external symbols.

Optionally, IDF can make use of additional information to help disassemble the program. The additional information can be generated by specifying the assembler TEST option and the linkage editor TEST option.

Note: The Linkage Editor TEST option can make the final load module file quite large. If you prefer to suppress them, either omit the linkage editor TEST option or specify the NOTEST option.

The Linkage Editor TEST option increases the size of the load module file, so do not use it for production modules.

ADATA debugging information

The ASMLANGX utility extracts source level information from the ADATA debugging information. The output is an extract file. Although you can create extract files as sequential files, they are typically stored in a PDS.

The recommended format for the extract file is:

RECFM(VB) LRECL(1562) BLKSIZE(27998)

```
//ASMLANGX EXEC PGM=ASMLANGX,REGION=4096K,
// PARM='member (ASM LOUD ERROR'
//SYSADATA DD DISP=SHR,DSN=hlq..SYSADATA
//ASMLANGX DD DISP=OLD,DSN=hlq..ASMLANGX
3
```

Notes:

- 1. The PDS member name of the input and output file is passed as a parameter. For sequential files, this name is ignored.
- 2. The SYSADATA DD statement specifies the input data set name.
- 3. The ASMLANGX DD statement specifies the output data set name.

Figure 51. JCL that invokes the ASMLANGX utility

IDF debugger invocation

If you want to use an interactive utility to debug your program, invoke the IDF debugger by performing the following steps:

1. Specify the problem load module and the extract file that contains the debugging information by entering the following commands.

```
ALLOC FI (ASMLANGX) DS('hlq.ASMLANGX') SHR
TSOLIB ACT DS('hlq.LOAD')
```

2. Invoke IDF by entering the following command:

```
ASMIDF MYCODE
```

3. Press F9 to get the **Program Source and Disassembly** view.

Summary of useful references for the Metal C programmer

Table 6 on page 48 lists topics of interest to the Metal C programmer and, for each topic, lists information found in this document, as well as external references.

Table 6. Summary of useful references for the Metal C programmer			
Information	Internal reference	External references	
The base linkage conventions that are used by the generated modules.	"Metal C and MVS linkage conventions" on page 2	For detailed information about MVS linkage conventions, see Linkage conventions in z/OS MVS Programming: Assembler Services Guide.	
The Metal C Runtime Library.	Chapter 2, "Header files," on page 51	For additional information about the Metal runtime library, see METAL compiler option and Metal C Runtime Library (www.ibm.com/systems/z/os/zos/features/metalc).	

Table 6. Summary of useful references for the Metal C programmer (continued)			
Information	Internal reference	External references	
Using assembler statements within a C program.	"Inserting HLASM instructions into the generated source code" on page 20	For detailed information about HLASM programming, see <i>HLASM MVS & VM Programmer's Guide</i> .	
	"Inserting non-executable HLASM statements into the generated source code" on page 27	For detailed information about inline assembly statements, see Inline assembly statements (IBM extension) in z/OS XL C/C++ Language Reference.	
		For more information about callable system services, see z/OS MVS Programming: Callable Services for High-Level Languages.	
Using the METAL option.	"Programming with Metal C" on page 1	Note: For detailed information about the METAL option and how it interacts with other XL C compiler options, see METAL NOMETAL (C only) option in z/OS XL C/C++ User's Guide.	
Making access registers available to the Metal C application.	"AR-mode programming support" on page 32	For detailed information about using access registers, see z/OS MVS Programming: Extended Addressability Guide.	
Providing prolog and epilog code to customize the environment.	"Compiler-generated global SET symbols" on page 14 "Supplying your own prolog and epilog code" on page 12	Not applicable.	
Building the application by using JCL procedures.	"Building Metal C programs using JCL" on page 43	Not applicable.	
Building the application by using z/OS UNIX System Services.	"Building Metal C programs using z/OS UNIX System Services" on page 42	Not applicable.	
Generating the appropriate debugging information.	"Generation of debugging information" on page 47	Not applicable.	
Invoking the IDF debugger.	"IDF debugger invocation" on page 48	For specific information about IDF, see IBM Debug for z/OS (www.ibm.com/products/debug-for-zos).	

Chapter 2. Header files

Header files for the Metal C Runtime Library are located in the z/OS UNIX file system directory: /usr/include/metal/. To use these headers with a Metal C compiler, you must instruct the compiler to search this directory. There are a number of ways to do this.

Note: Some Metal C header files such as stdio.h have the same names as header files for the Language Environment C/C++ Runtime Library. To avoid including these, or inadvertently including any other headers supported by the LE library and not by Metal C, remove the non-Metal libraries from the search order. Depending on how you specify the system library search path, you need to remove other libraries from the SYSLIB concatenation of the compiler, or specify the NOSEARCH compiler option before pointing to /usr/include/metal/.

If you are compiling in batch, you can use the SEARCH compiler option:

```
SEARCH(/usr/include/metal/)
```

If you are compiling using the NOSEARCH compiler option, you have the following options:

Use the - I option of the xlc utility.

```
-I /usr/include/metal/
```

• Use the cinc attribute in the xlc configuration file.

```
cinc = -I /usr/include/metal/
```

builtins.h — Declare built-in functions

The builtins.h header contains a list of built-in functions supported by the compiler. A built-in function is inline code that is generated in place of an actual function call. For more information about the built-in functions, see <u>Using hardware built-in functions</u> in <u>z/OS XL C/C++ Programming Guide</u> and <u>"AR-mode programming support"</u> on page 32.

ctype.h — Declare character classification functions

The ctype.h header file declares functions used in character classification. The ctype.h header file declares the following functions.

isalnum()	isalpha()	isblank()	iscntrl()	isdigit()
isgraph()	islower()	isprint()	ispunct()	isspace()
isupper()	isxdigit()	tolower()	toupper()	

Note: All the functions in the previous table use code page IBM-1047.

float.h — Define ISO C/C++ constants for floating-point data types

The float.h header file contains definitions of constants listed in ISO C/C++ 5.2.4.2.2. The constants describe the characteristics of the internal representations of the three floating-point data types: float, double, and long double. Table 7 on page 52 lists the definitions contained by float.h.

Constant	Description
FLT_RADIX	The radix for a z/OS XL C Metal C application. For FLOAT(IEEE), the value is 2.
FLT_MANT_DIG DBL_MANT_DIG LDBL_MANT_DIG	The number of hexadecimal digits stored to represent the significand of a fraction.
FLT_DIG DBL_DIG LDBL_DIG	The number of decimal digits, q, such that any floating-point number with q decimal digits can be rounded into a floating-point number with p radix FLT_RADIX digits, and back again, without any change to the q decimal digits.
FLT_MIN_10_EXP DBL_MIN_10_EXP LDBL_MIN_10_EXP	The minimum negative integer such that 10 raised to that power is in the range of normalized floating-point numbers.
FLT_MAX_EXP DBL_MAX_EXP LDBL_MAX_EXP	The maximum integer such that FLT_RADIX raised to that power minus 1 is a representable finite floating-point number.
FLT_MAX_10_EXP DBL_MAX_10_EXP LDBL_MAX_10_EXP	The maximum integer such that 10 raised to that power is in the range of representable finite floating-point numbers.
FLT_MAX DBL_MAX LDBL_MAX	The maximum representable finite floating-point number.
FLT_EPSILON DBL_EPSILON LDBL_EPSILON	The difference between 1.0 and the least value greater than 1.0 that is representable in the given floating-point type.
FLT_MIN DBL_MIN LDBL_MIN	The minimum normalized positive floating-point number.
DECIMAL_DIG	The minimum number of decimal digits needed to represent all the significant digits for type long double.
FLT_EVAL_METHOD	Describes the evaluation mode for floating point operations. This value is 1, which evaluates
	 All operations and constants of types float and double to type double.
	 All operations and constants of long double to type long double.

inttypes.h — Define macros for sprintf and sscanf family

The following macros are defined in inttypes.h. Each expands to a character string literal containing a conversion specifier which can be modified by a length modifier that can be used in the *format* argument of a formatted input/output function when converting the corresponding integer type. These macros have the general form of PRI or SCN, followed by the conversion specifier, followed by a name corresponding to a similar type name in inttypes.h. In these names, the suffix number represents the width of the type. For example, *PRIdFAST32* can be used in a format string to print the value of an integer of type int_fast32_t.

Compile requirement: In the following list all macros with the suffix MAX or 64 require long long to be available.

Macros for sprintf family for signed integers.

PRId8	PRId16	PRId32	PRId64
PRIdLEAST8	PRIdLEAST16	PRIdLEAST32	PRIdLEAST64
PRIdFAST8	PRIdFAST16	PRIdFAST32	PRIdFAST64
PRIdMAX			
PRIdPTR			
PRIi8	PRIi16	PRIi32	PRIi64
PRIILEAST8	PRIILEAST16	PRIILEAST32	PRIILEAST64
PRIiFAST8	PRIiFAST16	PRIiFAST32	PRIiFAST64
PRIIMAX			
PRIiPTR			

Compile requirement: In the following list all macros with the suffix MAX or 64 require long long to be available.

Macros for sprintf family for unsigned integers.

PRIo8	PRIo16	PRIo32	PRIo64
PRIoLEAST8	PRIoLEAST16	PRIoLEAST32	PRIoLEAST64
PRIoFAST8	PRIoFAST16	PRIoFAST32	PRIoFAST64
PRIoMAX			
PRIoPTR			
PRIu8	PRIu16	PRIu32	PRIu64
PRIuLEAST8	PRIuLEAST16	PRIuLEAST32	PRIuLEAST64
PRIuFAST8	PRIuFAST16	PRIuFAST32	PRIuFAST64
PRIuMAX			
PRIuPTR			
PRIx8	PRIx16	PRIx32	PRIx64
PRIxLEAST8	PRIxLEAST16	PRIxLEAST32	PRIxLEAST64
PRIxFAST8	PRIxFAST16	PRIxFAST32	PRIxFAST64
PRIxMAX			
PRIxPTR			
PRIX8	PRIX16	PRIX32	PRIX64

PRIXLEAST8	PRIXLEAST16	PRIXLEAST32	PRIXLEAST64
PRIXFAST8	PRIXFAST16	PRIXFAST32	PRIXFAST64
PRIXMAX			
PRIXPTR			

Compile requirement: In the following list all macros with the suffix MAX or 64 require long long to be available.

Macros for sscanf family for signed integers.

SCNd8	SCNd16	SCNd32	SCNd64
SCNdLEAST8	SCNdLEAST16	SCNdLEAST32	SCNdLEAST64
SCNdFAST8	SCNdFAST16	SCNdFAST32	SCNdFAST64
SCNdMAX			
SCNdPTR			
SCNi8	SCNi16	SCNi32	SCNi64
SCNILEAST8	SCNiLEAST16	SCNiLEAST32	SCNiLEAST64
SCNiFAST8	SCNiFAST16	SCNiFAST32	SCNiFAST64
SCNiMAX			
SCNiPTR			

Compile requirement: In the following list all macros with the suffix MAX or 64 require long long to be available.

Macros for sscanf family for unsigned integers.

SCNo8	SCNo16	SCNo32	SCNo64
SCNoLEAST8	SCNoLEAST16	SCNoLEAST32	SCNoLEAST64
SCNoFAST8	SCNoFAST16	SCNoFAST32	SCNoFAST64
SCNoMAX			
SCNoPTR			
SCNu8	SCNu16	SCNu32	SCNu64
SCNuLEAST8	SCNuLEAST16	SCNuLEAST32	SCNuLEAST64
SCNuFAST8	SCNuFAST16	SCNuFAST32	SCNuFAST64
SCNuMAX			
SCNuPTR			
SCNx8	SCNx16	SCNx32	SCNx64
SCNxLEAST8	SCNxLEAST16	SCNxLEAST32	SCNxLEAST64
SCNxFAST8	SCNxFAST16	SCNxFAST32	SCNxFAST64
SCNxMAX			
SCNxPTR			

iso646.h — Define macros for operators

The header file iso646.h allows you to use the following macros in place of the associated operator.

Table 8. Macros and associated operators		
Macros	Operators	
and	&&	
and_eq	&=	
bitand	&	
bitor		
compl	~	
not	!	
not_eq	!=	
or	II	
or_eq	=	
xor	^	
xor_eq	^=	

limits.h — Declare symbolic names for resource limits

The limits.h header file contains symbolic names that represent standard values for limits on resources, such as the maximum value for an object of type char.

Symbolic name

Resource limit

CHAR_BIT

8

CHAR_MAX

127 (_CHAR_SIGNED)

CHAR_MAX

255

CHAR MIN

(-128) (_CHAR_SIGNED)

CHAR_MIN

0

INT MAX

2147483647

INT MIN

(-2147483647 - 1)

LLONG_MAX

(9223372036854775807LL)

LLONG_MIN

(-LLONG_MAX-1)

LONG_MAX

2147483647

LONGLONG_MAX

(9223372036854775807LL)

LONG_MIN

(-2147483647L - 1)

LONGLONG_MIN

(-LONGLONG_MAX - 1)

MB_LEN_MAX

4

SCHAR_MAX

127

SCHAR_MIN

(-128)

SHRT MAX

32767

SHRT_MIN

(-32768)

SSIZE MAX

2147483647

UCHAR MAX

255

UINT MAX

4294967295

ULONG_MAX

4294967295U

ULONGLONG MAX

(18446744073709551615ULL)

ULLONG_MAX

(18446744073709551615ULL)

USHRT_MAX

65535

math.h — Define macros for floating-point support

The math.h header file contains macro declarations for use with floating-point support:

No feature test macro is required.

Object-like Macros: The definitions are as follows.

HUGE VAL

A very large positive number that expands to a double expression.

HUGE_VALF

A very large positive number that expands to a float expression.

HUGE_VALL

A very large positive number that expands to a long double expression.

INFINITY

A constant expression of type float representing positive infinity.

NAN

A constant expression of type float representing a quiet NaN.

metal.h — Define Metal C related function prototypes and data

The metal.h header file contains function prototypes and data definitions related to the Metal C runtime library, including the __cinit() and __cterm() functions.

The metal.h header file also includes __csysenv_s, which is the structure used to describe the characteristics of a Metal C environment. For more information about the __csysenv_s structure, see "_cinit() - Initialize a Metal C environment" on page 67.

Note: The metal.h header file is automatically included by any Metal C runtime library header file, so it is not necessary to explicitly include it if a header file is being used.

stdarg.h — Define macros for accessing variable-length argument lists in functions

The stdarg. h header file defines macros used to access arguments in functions with variable-length argument lists.

va_arg()

va_copy()

va_start()

va_end()

The stdarg.h header file also defines the structure va_list.

The stdarg.h header file defines va_list as char *va_list.

stdbool.h — Define macros for bool type

The stdbool.h header defines the following macros:

Table 9. Macros that are defined in stdbool.h		
Macro	Description	
bool	Expands to _Bool	
bool_true_false_are_defined	Expands to 1	
false	Expands to 0	
true	Expands to 1	

stddef.h — Define ptrdiff_t, size_t, and ssize_t data types

The stddef.h header file defines the following types:

ptrdiff_t

The signed long type of the result of subtracting two pointers.

size t

typedef for the type of the value returned by sizeof.

ssize t

similar to size_t, but must be a signed type.

The stddef.h header defines the macros NULL and offsetof. NULL is a pointer that never points to a data object. The offsetof macro expands to the number of bytes between a structure member and the start of the structure. The offsetof macro has the form offsetof(structure_type, member).

stdio.h - Define I/O related functions

The stdio.h header file declares the following functions:

snprintf() sprintf()

sscanf()

vsnprintf()

vsprintf()

vsscanf()

The stdlio.h header file also contains definition for the following macro, whose value should not be altered:

NULL

A pointer which never points to a data object.

stdint.h — Define integer types and related limits and macros

The stdint.h header defines integer types, limits of specified width integer types, limits of other integer types, and macros for integer constant expressions.

Note: For the exact width integer types, minimum-width integer types, limits of specified width integer types, and exact width integer constants, *bit sizes N* with the values 8, 16, 32, and 64 are supported.

Requirement: Use of the bit size 64 and greatest-width integer types or macros require LP64 or the long long data type to be available.

Integer types

The following exact width integer types are defined.

- intN t
- uintN t

The following minimum-width integer types are defined.

- int leastN t
- uint_leastN_t

The following fastest minimum-width integer types are defined. These types are the fastest to operate with among all integer types that have at least the specified width.

- int_fastN_t
- uint_fastN_t

The following greatest-width integer types are defined. These types hold the value of any signed/unsigned integer type.

Note: Requires long long to be available.

- intmax_t
- uintmax_t

The following integer types capable of holding object pointers are defined.

- intptr t
- uintptr_t

Object-like macros for limits of integer types:

Macros for limits of exact width integer types.

- INTN_MAX
- INTN_MIN
- UINTN_MAX

Macros for limits of minimum width integer types.

- INT LEASTN MAX
- INT_LEASTN_MIN
- UINT_LEASTN_MAX

Macros for limits of fastest minimum width integer types.

- INT_FASTN_MAX
- INT_FASTN_MIN

• UINT_FASTN_MAX

Macros for limits of greatest width integer types.

- INTMAX MAX
- INTMAX MIN
- UINTMAX_MAX

Macros for limits of pointer integer types.

- INTPTR_MAX
- INTPTR_MIN
- UINTPTR_MAX

Macros for limits of ptrdiff_t.

- PTRDIFF_MAX
- PTRDIFF_MIN

Macro for limit of size_t.

• SIZE_MAX

Function-like macros for integer constants:

Macros for minimum width integer constants.

- INTN_C(value)
- UINTN_C(value)

Macros for greatest-width integer constants:

- INTMAX_C(value)
- UINTMAX_C(value)

stdlib.h — Define standard library functions

The stdlib. h header file contains declarations for the following functions.

abs() ¹	atoi()	atol()	atoll()	calloc()
div()	free()	labs()	ldiv()	llabs()
lldiv()	malloc()	malloc31()	qsort()	rand()
rand_r()	realloc()	srand()	strtod()	strtof()
strtol()	strtold()	strtoll()	strtoul()	strtoull()

¹ Built-in function.

Two type definitions are added to stdlib.h for the Compare and Swap functions cs() and cds(). The structures defined are cs_t and cds_t .

The type size_t is declared in the header file. It is used for the type of the value returned by sizeof. For more information on the types size_t, see <u>"stddef.h — Define ptrdiff_t, size_t, and ssize_t data types" on page 57.</u>

The stdlib.h declares div_t , $ldiv_t$, and $lldiv_t$, which define the structure types that are returned by div(), ldiv(), and lldiv().

The stdlib.h file also contains definitions for the following macros:

NULL

The NULL pointer constant (also defined in stddef.h).

RAND_MAX

Expands to an integer representing the largest number that the rand() or $rand_r()$ function can return.

string.h — Declare string manipulation functions

The string.h header file declares the string manipulation functions and their built-in versions.

memccpy()	memchr() ¹	memcmp() ¹	memcpy() ¹	memmove()
memset() ¹	strcat() ¹	strchr() ¹	strcmp() ¹	strcpy() ¹
strcspn()	strdup()	strlen() ¹	strncat() ¹	strncmp() ¹
strncpy() ¹	strpbrk()	strrchr() ¹	strspn()	strstr()
strtok()	strtok_r()			

¹ Built-in function.

The string.h header file also defines the macro NULL and the type size_t. For more information see "stddef.h — Define ptrdiff_t, size_t, and ssize_t data types" on page 57.

Chapter 3. C functions available to Metal C programs

This topic describes the Metal C runtime library functions.

The linkage conventions used by the XL C METAL compiler option govern use of the C functions that are available to XL C-compiled freestanding programs. For more information, see "Metal C and MVS linkage conventions" on page 2.

When you use any of these supplied C functions, be aware of the information provided in <u>"Characteristics</u> of compiler-generated HLASM source code" on page 4.

Characteristics of Metal C runtime library functions

Linkage to each function is through the default linkage provided by the METAL option of the C compiler. This assumes that GPR 13 points to a stack frame in a contiguous stack, and that the forward pointer in the stack frame contains the address of the next available byte in the stack. The stack frame requirements for each function are documented in Appendix A, "Function stack requirements," on page 119 so that the caller knows how much space to reserve.

The library functions support AMODE 31 and AMODE 64.

The library functions (with the exception of a few AR mode supporting functions) expect the ASC mode to be Primary on entry. The AR mode support part of Metal C ensures that this is enforced; however, if calling these library functions from within HLASM embedded statements or their own HLASM programs, you need to manage ASC mode to meet this requirement.

The library functions support IEEE floating point numbers.

The library uses code page IBM-1047 and the En_US locale definitions to perform its functions.

System and static object libraries

The Metal C runtime library supports two versions of its library functions: a system library and a static object library. The behavior of the functions within the two versions is the same. What differs is where the functions are located and how the Metal C application interacts with them.

System library

The system library is a version of the Metal C runtime library that exists within the system's link pack area, and is made available during the system IPL process. It is suggested that you use the system library if the Metal C application is run on a level of z/OS that supports the runtime library, and the application runs after the library has been made available. This library has the added advantage of not requiring application module relinks when service is applied to the library.

To use the system library version, you can include the wanted Metal C runtime library headers in the Metal C application source code. The default behavior of the headers is to generate code within the application that calls this system library. No additional binding is needed in order for these function calls to work.

Note: The compiler does not generate inline code for the following built-in functions when **COMPACT** is specified: memcmp, strcat, strchr, strncat, strncmp, strncpy. In this case, you need to define the __METAL_SYSVEC feature test macro.

Static object library

The Static object library is a version of the Metal C runtime library that gets directly bound with a Metal C application load module. The resulting application is self-contained with respect to the library; all library function calls from the application result in the functions that are bound within the load module to be driven.

It is suggested that you use the static object library if the Metal C application meets either of the following requirements:

- The application is run on a supported level of z/OS that does not support the system library (before z/OS V1.9).
- The application is run during system IPL before the system library has been made available.

The static object library functions are provided in two system data sets: SYS1.SCCR3BND and SYS1.SCCR6BND. SYS1.SCCR3BND is used with Metal C applications that have been compiled using ILP32 and run AMODE 31. SYS1.SCCR6BND is used with Metal C applications that have been compiled using LP64 and run AMODE 64.

To use the static object library, you must take the following steps:

1. Define the __METAL_STATIC feature test macro before including the headers in your Metal C program, and then compile the program. For example:

```
#define __METAL_STATIC
#include <stdio.h>
```

This will cause library function calls in the program to generate external references to the functions contained within the SCCRnBND data sets.

- 2. Bind the compiled object with the corresponding SCCRnBND data set. How this is done depends on the environment in which the binding takes place:
 - Batch: When using the binder from a batch job, use the CALL option, and use the SYSLIB DD to identify the static object library data set that you want to bind with.
 - UNIX System Services shell: From the shell, it is suggested that the **1d** shell command be used to bind the application with the library functions. This avoids conflicts with the Language Environment stubs that the c89 family of commands might introduce. Use the **-S** option to identify the static object library data set that you want to bind with. For example:

```
-S //"'SYS1.SCCR3BND'"
```

Note: When service is applied to the static object library, the Metal C application must be relinked to pick up the changes.

General library usage notes

- A Metal C application can use either the system library or the static object library, but not both. The mixing of system library calls and static object library calls within the same application is not supported.
- All static objects that are bound to the application load module must be at compatible service levels.
- Metal C runtime library functions are not supported under Language Environment and must not be used within a Language Environment program, because equivalent functions are already available.

User-replaceable heap services

The Metal C Runtime Library provides the ability to completely replace the underlying heap services at run time. You can use this function if you want the heap services to use a different storage management mechanism, for instance, one that is already in use elsewhere within an application.

A Metal C application replaces the underlying heap services by providing sets of function entry points in the __csysenv_s structure that is passed to the __cinit() function. To have the function entry point fields available and recognized by the __cinit() function, take the following steps:

- Define __METAL_CSYSENV_VERSION 2 so that the __csysenv_s structure contains the heap service function entry point fields.
- In the csysenv s structure, set field cseversion to CSE VERSION 2.
- In the __csysenv_s structure, provide addresses for heap functions that are to be replaced.

• Call the __cinit() function, providing the __csysenv_s structure that was initialized.

The Metal C application can provide at environment initialization time 8 bytes of data that can be accessed by the replacement heap services. To reserve the 8 bytes of data, take the following steps:

- Before calling the __cinit() function, set the user data of the application in field __cseheapuserdata in the __csysenv_s structure.
- Use the R12 environment token value as a pointer to the __csysenvtoken_s structure. In this structure, field csetheapuserdata contains 8 bytes of data of the application.

During the __cinit() call, field __csetheapuserdata can only be set from __cseheapuserdata if heap services have been replaced; otherwise, field __csetheapuserdata will be set to binary zeroes.

Two sets of heap service function entry points are provided, one set for replacing heap services in the AMODE 31 version of the library, and the other set for replacing heap services in the AMODE 64 version of the library.

AMODE 31 heap services

To replace heap services in the AMODE 31 version of the library, consider the following __csysenv_s fields:

void * (*__cseamode31malloc) (size_t)

When specified, MCRTL AMODE 31 malloc() calls this routine to obtain a piece of below-the-bar heap storage and returns its result to the caller of malloc(). __cseamode31malloc is treated as having the same function prototype as malloc(): void * malloc (size_t);

void (* __cseamode31free) (void *)

When specified, MCRTL AMODE 31 free() calls this routine to free a piece of heap storage.

__cseamode31free is treated as having the same function prototype as free(): void free(void *);

void * (*__cseamode31realloc) (void *, size_t)

When specified, MCRTL AMODE 31 realloc() calls this routine to perform a realloc for a piece of heap storage and returns its result to the caller of realloc(). __cseamode31realloc is treated as having the same function prototype as realloc(): void * realloc (void *, size_t);

Providing this routine is optional. If realloc() is called when a __cseamode31malloc routine has been provided but __cseamode31realloc has not, realloc() will return a zero.

Note: __cseamode31malloc and __cseamode31free must be provided together. __cseamode31realloc is optional, but when it is provided, the application must also include the other AMODE 31 heap services in this set.

AMODE 64 heap services

To replace heap services in the AMODE 64 version of the library, consider the following __csysenv_s fields:

void * (* cseamode64malloc) (size t)

When specified, MCRTL AMODE 64 malloc() calls this routine to obtain a piece of above-the-bar heap storage and returns to the caller of malloc(). __cseamode64malloc is treated as having the same function prototype as malloc(): void * malloc (size_t);

void * (* cseamode64malloc31) (size t)

When specified, MCRTL AMODE 64 __malloc31() calls this routine to obtain a piece of below-the-bar heap storage and returns its result to the caller of __malloc31(). __cseamode64malloc31 is treated as having the same function prototype as __malloc31(): void *__malloc31(size_t);

void (* __cseamode64free) (void *)

When specified, MCRTL AMODE 64 free() calls this routine to free a piece of heap storage. __cseamode64free is treated as having the same function prototype as free(): void free(void *);

Note that MCRTL AMODE 64 free() accepts as input and processes heap storage that is allocated above or below the bar. The user-specified __cseamode64free routine must provide the same capability.

void * (*__cseamode64realloc) (void *, size_t)

When specified, MCRTL AMODE 64 realloc() calls this routine to perform a realloc for a piece of heap storage and returns its result to the caller of realloc(). __cseamode64realloc is treated as having the same function prototype as realloc(): void * realloc (void *, size_t);

Providing this routine is optional. If realloc() is called when a __cseamode64malloc routine has been provided but __cseamode64realloc has not, realloc() will return a zero.

Note that MCRTL AMODE 64 realloc() accepts as input and processes heap storage that is allocated above or below the bar. The user-specified __cseamode64realloc routine must provide the same capability.

Note: __cseamode64malloc, __cseamode64malloc31, and __cseamode64free must all be provided together. __cseamode64realloc is optional, but when it is provided, the application must also include the other AMODE 64 heap services in this set.

Usage notes

- Each heap service gets control in the AMODE of the calling service. The heap service must return to the calling service in that same AMODE.
- Each heap service is called using standard Metal C linkage conventions, including:
 - GPR 1 containing the address of the function parameter list (using C style parameter passing)
 - GPR 13 containing the address of a stack frame allocated on a contiguous Metal C stack

GPR 12 contains the environment token representing the Metal C environment that is currently in use.

- It is not necessary to provide a replacement for the calloc() function. The calloc() function calls malloc() as part of its processing, so replacing malloc() indirectly alters the behavior of calloc() as well.
- When user-provided heap services are in use, the Metal C Runtime Library makes no attempt to keep track of any heap storage that has been allocated by the application. The application is entirely responsible for tracking its heap storage, and for freeing it after it calls __cterm() to terminate the Metal C environment.
- The heap allocation functions should return NULL when they are unable to obtain storage. The application is responsible for capturing its own diagnostic data when necessary.
- The Metal C Runtime Library expects the following alignment for the storage that is returned by the replacement heap services:
 - Storage returned from the below-the-bar heap (AMODE 64 __malloc31(), and AMODE 31 malloc()) is doubleword aligned.
 - Storage returned from the above-the-bar heap (AMODE 64 malloc()) is quadword aligned.

abs() — Calculate integer absolute value

Format

```
#include <stdlib.h>
int abs(int n);
```

General description

The abs() function returns the absolute value of an argument n.

For the integer version of abs(), the minimum allowable integer is INT_MIN+1. (INT_MIN is a macro that is defined in the limits.h header file.) For example, with the Metal C compiler, INT_MIN+1 is -2147483647.

Returned value

The returned value is the absolute value, if the absolute value is possible to represent.

Otherwise the input value is returned.

Related Information

- "limits.h Declare symbolic names for resource limits" on page 55
- "stdlib.h Define standard library functions" on page 59
- "labs() Calculate long absolute value" on page 73

atoi() — Convert character string to integer

Format

```
#include <stdlib.h>
int atoi(const char *nptr);
```

General description

The atoi() function converts the initial portion of the string pointed to by *nptr* to a 'int'. This is equivalent to

```
(int)strtol(nptr, (char **)NULL, 10)
```

Returned value

If successful, atoi() returns the converted int value represented in the string.

If unsuccessful, atoi() returns an undefined value.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atol() Convert character string to long" on page 65
- "atoll() Convert character string to signed long long" on page 66
- "strtol() Convert Character String to Long" on page 107
- "strtoll() Convert String to Signed Long Long" on page 110
- "strtoul() Convert String to Unsigned Integer" on page 111
- "strtoull() Convert String to Unsigned Long Long" on page 112

atol() — Convert character string to long

Format

```
#include <stdlib.h>
long int atol(const char *nptr);
```

General description

The atol() function converts the initial portion of the string pointed to by *nptr* to a 'long int'. This is equivalent to

```
strtol(nptr, (char **)NULL, 10)
```

Returned value

If successful, atol() returns the converted long int value represented in the string.

If unsuccessful, atol() returns an undefined value.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atoll() Convert character string to signed long long" on page 66
- "strtol() Convert Character String to Long" on page 107
- "strtoll() Convert String to Signed Long Long" on page 110
- "strtoul() Convert String to Unsigned Integer" on page 111
- "strtoull() Convert String to Unsigned Long Long" on page 112

atoll() - Convert character string to signed long long

Format

```
#define _ISOC99_SOURCE
#include <stdlib.h>
long long atoll(const char *nptr);
```

Compile Requirement: Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language</u> Reference for information about how to make long long available.

General description

The atoll() function converts the initial portion of the string pointed to by *nptr* to a 'long long int'. This is equivalent to strtoll(*nptr*, (char **)NULL, 10).

Returned value

If successful, atoll() returns the converted signed long long value, represented in the string. If unsuccessful, it returns an undefined value.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "strtol() Convert Character String to Long" on page 107
- "strtoll() Convert String to Signed Long Long" on page 110
- "strtoul() Convert String to Unsigned Integer" on page 111
- "strtoull() Convert String to Unsigned Long Long" on page 112

calloc() — Reserve and initialize storage

Format

```
#include <stdlib.h>
void *calloc(size_t num, size_t size);
```

General description

The calloc() function reserves storage space for an array of *num* elements, each of length *size* bytes. The calloc() function then gives all the bits of each element an initial value of 0.

The calloc() function returns a pointer to the reserved space. The storage space to which the returned value points is aligned for storage of any type of object.

Note: Use of this function requires that an environment has been set up through the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned value

If successful, calloc() returns the pointer to the area of memory reserved.

If there is not enough space to satisfy the request or if *num* or *size* is 0, calloc() returns NULL.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "free() Free a block of storage" on page 71
- "malloc() Reserve storage block" on page 75
- "__malloc31() Allocate 31-bit storage" on page 76
- "realloc() Change reserved storage block size" on page 81

__cinit() - Initialize a Metal C environment

Format

```
#include <metal.h>
__csysenv_t __cinit(struct __csysenv_s * csysenv);
```

General description

The __cinit() function establishes a Metal C environment based on the characteristics in the input csysenv structure. This environment is used when calling Metal C functions that require an environment, such as those related to storage management (malloc(), free(), and so on). Storage for the environment structures is obtained by using the attributes specified in the input csysenv structure.

Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language Reference</u> for information about how to make long long data type available

The environment token created by __cinit() can be used from both AMODE 31 and AMODE 64 programs. Calls to __malloc31() always affect the below-the-bar heap. Calls made while in AMODE 31 to all other functions that obtain storage affect the below-the-bar heap; calls made while in AMODE 64 affect the above-the-bar heap.

Table 10. csysenv argument incinit()			
Argument Description			
csysenv	A structure describing the characteristics of the environment to be created.		

The details on the csysenv (__csysenv_s) structure is shown as follows:

```
struct __csysenv_s {
           __cseversion;
                                  /* Control block version number
int
                                  /* Must be set to __CSE_VERSION_1
              _csesubpool;
                                  /* for 31 bit storage
__ptr31(void, __csetcbowner) /* owning TCB for resources /* default: TCB mode - caller tcb,
                                                                              */
*/
*/
*/
*/
                                  /* SRB. XMEM - CMRO TCB
                                   /* Reserved field
 int
              csereserved;
             __csettknowner[16]; /* TCB token of owning TCB for
 char
                                  /* above the bar storage
                                  /* default: caller tcbtoken
                                        SRB mode: tcbtoken must be
                                                   specified
 unsigned int
            __cseheap31initsize; /* Minimum size, in bytes, to obtain
for the initial AMODE 31 heap storage.
                                   If 0, defaults to 32768 bytes
 unsigned int
            __cseheap31incrsize; /* Minimum size, in bytes, to obtain
                                   when expanding the AMODE 31 heap. If 0, defaults to 32768 bytes
#ifdef
 unsigned long long
            __cseheap64initsize; /* Minimum size, in MB, to obtain
for the initial AMODE 64 heap storage.
                                   If 0, defaults to 1 MB
 unsigned long long
            __cseheap64incrsize; /* Minimum size, in MB, to obtain
                                   When expanding the AMODE 64 heap. If 0, defaults to 1MB
 unsigned long long
            __cseheap64usertoken; /* usertoken for use with ?iarv64
                                   to obtain above the bar storage
#else
__cseheap64initsize_hh; unsigned int
 unsigned int
            __cseheap64initsize; /* Minimum size, in MB, to obtain
                                    for the initial AMODE 64 heap storage.
                                   If 0, defaults to 1 MB
 unsigned int
              _cseheap64incrsize_hh;
 unsigned int
            __cseheap64incrsize; /* Minimum size, in MB, to obtain
When expanding the AMODE 64 heap.
If 0, defaults to 1MB
 unsigned int
              _cseheap64usertoken_hh;
 unsigned int
            __cseheap64usertoken;/* usertoken for use with ?iarv64
                                   to obtain above the bar storage
#endif
 unsigned int
                                  /* AMODE 64 Storage Attributes
             __cseheap64fprot:1, /* On, AMODE 64 heap storage is to be
                                      fetch protected
                                      Off, storage is not fetch
             protected
__cseheap64cntlauth:1; /* On, AMODE 64 heap storage has
                                      CONTROL=AUTH attribute
                                      Off, storage is CONTROL=UNAUTH
 int
              __csereserved1[7]; /* Reserved for future use
};
```

Note: The entire __csysenv_s structure must be cleared to binary zeros before initializing specific fields within it.

Returned value

If successful, __cinit() returns an environment token that is used on subsequent calls to Metal C functions that require an environment. If unable to create an environment, __cinit() returns 0.

Example

```
#include <metal.h>
#include <stdlib.h>
#include <string.h>
#ifdef _LP64
register void * myenvtkn __asm("r12");
register void * myetkr12 __asm("r12");
 _csysenv_t myenvtkn;
void mymtlfcn(void) {
 struct __csysenv_s mysysenv;
 void * mystg;
 void * my31stg;
 /****************
 /* Initialize the csysenv structure.
 /*********************************
 memset(&mysysenv, 0x00, sizeof(mysysenv));
 mysysenv.__cseversion = __CSE_VERSION_1;
 mysysenv.__csesubpool = 129;
 /*****************************
 /* Set heap initial and increment sizes.
 mysysenv.__cseheap31initsize = 131072;
 mysysenv.__cseheap31incrsize = 8192;
 mysysenv.__cseheap64initsize = 20;
 mysysenv._
        _cseheap64incrsize = 1;
#ifdef _LP64
 /* Create a Metal C environment.
 /******************************
 myenvtkn = (void * ) __cinit(&mysysenv);
#else
 /*********************************
 /* Create a Metal C environment.
 /*****************
 myenvtkn = __cinit(&mysysenv);
 /*********************************
 /* Save the high half of R12 and then set R12 to */
 /* the 8 byte environment token.
 /****************
 : "m"(myenvtkn)
     : "r12"
                   );
#endif
 /*****************
 /* Call functions that require an environment.
 my31stg = \_malloc31(100);
 /******************************
 /* Clean up the environment.
```

```
__cterm((__csysenv_t) myenvtkn);
}
```

In order to share the environment token to other source files there are 2 options:

- Compile all Metal C files that make up the program by using the RESERVED_REG("r12") compiler option. This reserves register 12 so that the environment token will remain untouched by the compiled code.
- Pass myenvtkn by using other methods, and for any source that needs to use the environment token declare the global register variable as in this example and assign the environment token to it.

Output: None.

_cterm() - Terminate a Metal C environment

Format

```
#include <metal.h>
void __cterm(__csysenv_t csysenvtkn);
```

General description

The __cterm() function terminates a Metal C environment, freeing all resources obtained on behalf of the environment.

Table 11. csysenvtkn argument incterm()			
Argument Description			
csysenvtkn The environment token representing the environment to b terminated.			

Returned value

None.

Example

See the example provided for the __cinit() function.

Output: None.

div() — Calculate quotient and remainder

Format

```
#include <stdlib.h>
div_t div(int numerator, int denominator);
```

General description

The div() function calculates the quotient and remainder of the division of *numerator* by *denominator*.

Returned value

The div() function returns a structure of type div_t, containing both the quotient int *quot* and the remainder int *rem*. This structure is defined in stdlib.h. If the returned value cannot be represented, the behavior of div() is undefined. If *denominator* is 0, a divide by 0 exception is raised.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "ldiv() Compute quotient and remainder of integral division" on page 74
- "lldiv() Compute quotient and remainder of integral division for long long type" on page 75

free() — Free a block of storage

Format

```
#include <stdlib.h>
void free(void *ptr);
```

General description

The free() function frees a block of storage pointed to by *ptr*. The *ptr* variable points to a block previously reserved with a call to calloc(), malloc(), or realloc(). The number of bytes freed is the number of bytes specified when you reserved (or reallocated, in the case of realloc()), the block of storage. If *ptr* is NULL, free() simply returns without freeing anything. Since *ptr* is passed by value free() will not set *ptr* to NULL after freeing the memory to which it points.

Notes:

- 1. Use of this function requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.
- 2. Attempting to free a block of storage not allocated with calloc(), malloc(), or realloc(), or previously freed storage, can affect the subsequent reserving of storage and lead to an abend.

Returned value

free() returns no value.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "calloc() Reserve and initialize storage" on page 67
- "malloc() Reserve storage block" on page 75
- " malloc31() Allocate 31-bit storage" on page 76
- "realloc() Change reserved storage block size" on page 81

isalnum() to isxdigit() — Test integer value

Format

```
#include <ctype.h>
int isalnum(int c);
int isalpha(int c);
int isblank(int c);
int iscntrl(int c);
int isgraph(int c);
int isgraph(int c);
int islower(int c);
int isprint(int c);
int ispunct(int c);
int ispunct(int c);
int ispace(int c);
int isupper(int c);
int isupper(int c);
```

General description

The functions listed in the previous section, which are all declared in ctype.h, test a given integer value. The valid integer values for c are those representable as an *unsigned char* or EOF.

Here are descriptions of each function in this group.

isalnum()

Test for an upper- or lowercase letter, or a decimal digit, as defined by code page IBM-1047.

isalpha()

Test for an alphabetic character, as defined by code page IBM-1047.

isblank()

Test for a blank character, as defined by code page IBM-1047.

iscntrl()

Test for any control character, as defined by code page IBM-1047.

isdigit()

Test for a decimal digit, as defined by code page IBM-1047.

isgraph()

Test for a printable character excluding space, as defined by code page IBM-1047.

islower()

Test for a lowercase character, as defined by code page IBM-1047.

isprint()

Test for a printable character including space, as defined by code page IBM-1047.

ispunct()

Test for any non-alphanumeric printable character, excluding space, as defined by code page IBM-1047.

isspace()

Test for a white space character, as defined by code page IBM-1047.

isupper()

Test for an uppercase character, as defined by code page IBM-1047.

isxdigit(

Test for a hexadecimal digit, as defined by code page IBM-1047.

Returned value

If the integer satisfies the test condition, these functions return nonzero.

If the integer does not satisfy the test condition, these functions return 0.

Related Information

- "ctype.h Declare character classification functions" on page 51
- "tolower(), toupper() Convert Character Case" on page 113

isalpha() — Test for alphabetic character classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isblank() — Test for blank character classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

iscntrl() - Test for control classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isdigit() — Test for decimal-digit classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isgraph() — Test for graphic classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

islower() — Test for lowercase

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isprint() — Test for printable character classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

ispunct() — Test for punctuation classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isspace() — Test for space character classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isupper() — Test for uppercase letter classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

isxdigit() — Test for hexadecimal digit Classification

The information for this function is included in "isalnum() to isxdigit() — Test integer value" on page 71.

labs() — Calculate long absolute value

Format

```
#include <stdlib.h>
long int labs(long int n);
```

General description

The labs() function calculates the absolute value of its long integer argument *n*. The result is undefined when the argument is equal to LONG_MIN, the smallest available long integer (-2 147 483 648). The value LONG MIN is defined in the limits.h header file.

Returned value

The labs() function returns the absolute value of the long integer argument *n*.

Related Information

- "limits.h Declare symbolic names for resource limits" on page 55
- "stdlib.h Define standard library functions" on page 59

- "abs() Calculate integer absolute value" on page 64
- "llabs() Calculate absolute value of long long integer" on page 74

ldiv() — Compute quotient and remainder of integral division

Format

```
#include <stdlib.h>
ldiv_t ldiv(long int numerator, long int denominator);
```

General description

The ldiv() function calculates the quotient and remainder of the division of *numerator* by *denominator*.

Returned value

The ldiv() function returns a structure of type ldiv_t, containing both the quotient long int quot and the remainder long int rem.

If the value cannot be represented, the returned value is undefined. If *denominator* is 0, a divide by 0 exception is raised.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "div() Calculate quotient and remainder" on page 70
- "lldiv() Compute quotient and remainder of integral division for long long type" on page 75

llabs() — Calculate absolute value of long long integer

Format

```
#include <stdlib.h>
long long llabs(long long int n);
```

Compile Requirement: Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language</u> Reference for information about how to make long long available.

General description

The llabs() function calculates the absolute value of its long long integer argument *n*. The result is undefined when the argument is equal to LONGLONG_MIN, the smallest available long long integer (-9 223 372 036 854 775 808). The value LONGLONG_MIN is defined in the limits.h header file.

Returned value

The llabs() function returns the absolute value of the long long integer argument *n*.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "limits.h Declare symbolic names for resource limits" on page 55

- "abs() Calculate integer absolute value" on page 64
- "labs() Calculate long absolute value" on page 73

lldiv() — Compute quotient and remainder of integral division for long long type

Format

```
#include <stdlib.h>
lldiv_t lldiv (long long number, long long denom);
```

Compile Requirement: Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language</u> Reference for information about how to make long long available.

General description

The lldiv() function calculates the quotient and remainder of the division of numerator by denominator.

Returned value

The lldiv() function returns a structure of type lldiv_t, containing both the quotient long long quot and the remainder long long rem.

If the value cannot be represented, the returned value is undefined. If *denominator* is 0, a divide by 0 exception is raised.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "div() Calculate quotient and remainder" on page 70
- "ldiv() Compute quotient and remainder of integral division" on page 74

malloc() — Reserve storage block

Format

```
#include <stdlib.h>
void *malloc(size_t size);
```

General description

The malloc() function reserves a block of storage of *size* bytes. Unlike the calloc() function, the content of the storage allocated is indeterminate. The storage to which the returned value points is always aligned for storage of any type of object.

Note: Use of this function requires that an environment has been set up through the __cinit() function. When the function is called, GPR12 must contain the environment token created by the __cinit() call.

Returned value

If successful, malloc() returns a pointer to the reserved space.

If not enough storage is available, or if size was specified as 0, malloc() returns NULL.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "calloc() Reserve and initialize storage" on page 67
- "free() Free a block of storage" on page 71
- "__malloc31() Allocate 31-bit storage" on page 76
- "realloc() Change reserved storage block size" on page 81

_malloc31() — Allocate 31-bit storage

Format

```
#include <stdlib.h>
void *__malloc31(size_t size);
```

General description

The __malloc31() function reserves a block of storage of *size* bytes from 31-bit addressable storage. The content of the storage allocated is indeterminate. The storage space to which the returned value points is always suitably aligned for storage of any type of object.

Note: Use of this function requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned value

If successful, __malloc31() returns a pointer to the reserved space.

If not enough storage is available, or if size was specified as 0, __malloc31() returns NULL.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "calloc() Reserve and initialize storage" on page 67
- "free() Free a block of storage" on page 71
- "malloc() Reserve storage block" on page 75
- "realloc() Change reserved storage block size" on page 81

memccpy() — Copy bytes in memory

Format

```
#include <string.h>
void *memccpy(void *__restrict__s1, const void *__restrict__s2, int c, size_t n);
```

General description

The memccpy() function copies bytes from memory area s2 into memory area s1, stopping after the first occurrence of byte c (converted to an unsigned char) is copied, or after n bytes are copied, whichever comes first.

Returned value

If successful, memccpy() returns a pointer to the byte after the copy of c in s1.

If c was not found in the first n bytes of s2, memccpy() returns a NULL pointer.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memchr() Search buffer" on page 77
- "memcmp() Compare bytes" on page 77
- "memcpy() Copy buffer" on page 78
- "memmove() Move buffer" on page 79
- "memset() Set buffer to value" on page 79
- "strcpy() Copy String" on page 96

memchr() — Search buffer

Format

```
#include <string.h>
void *memchr(const void *buf, int c, size_t count);
```

General description

The memchr() built-in function searches the first *count* bytes pointed to by *buf* for the first occurrence of *c* converted to an unsigned character. The search continues until it finds *c* or examines *count* bytes.

Returned value

If successful, memchr() returns a pointer to the location of c in buf.

If c is not within the first count bytes of buf, memchr() returns NULL.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memccpy() Copy bytes in memory" on page 76
- "memcmp() Compare bytes" on page 77
- "memcpy() Copy buffer" on page 78
- "memmove() Move buffer" on page 79
- "memset() Set buffer to value" on page 79
- "strchr() Search for Character" on page 95

memcmp() — Compare bytes

Format

```
#include <string.h>
int memcmp(const void *buf1, const void *buf2, size_t count);
```

General description

The memcmp() built-in function compares the first count bytes of buf1 and buf2.

The relation is determined by the sign of the difference between the values of the leftmost first pair of bytes that differ. The values depend on EBCDIC encoding. This function is *not* locale sensitive.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned value

Indicates the relationship between *buf1* and *buf2* as follows:

Value

Meaning

< 0

The contents of the buffer pointed to by buf1 less than the contents of the buffer pointed to by buf2

= 0

The contents of the buffer pointed to by buf1 identical to the contents of the buffer pointed to by buf2

> 0

The contents of the buffer pointed to by *buf1* greater than the contents of the buffer pointed to by *buf2*

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "memccpy() Copy bytes in memory" on page 76
- "memchr() Search buffer" on page 77
- "memcpy() Copy buffer" on page 78
- "memmove() Move buffer" on page 79
- "memset() Set buffer to value" on page 79
- "strcmp() Compare Strings" on page 96

memcpy() — Copy buffer

Format

```
#include <string.h>
void *memcpy(void * __restrict__dest, const void * __restrict__src, size_t count);
```

General description

The memcpy() built-in function copies *count* bytes from the object pointed to by *src* to the object pointed to by *dest*. For memcpy(), the source characters may be overlaid if copying takes place between objects that overlap. Use the memmove() function to allow copying between objects that overlap.

Returned value

The memcpy() function returns the value of dest.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memccpy() Copy bytes in memory" on page 76
- "memchr() Search buffer" on page 77
- "memmove() Move buffer" on page 79
- "memset() Set buffer to value" on page 79
- "strcpy() Copy String" on page 96

memmove() — Move buffer

Format

```
#include <string.h>
void *memmove(void *dest, const void *src, size_t count);
```

General description

The memmove() function copies *count* bytes from the object pointed to by *src* to the object pointed to by *dest*. The function allows copying between possibly overlapping objects as if the *count* bytes of the object pointed to by *src* must first copied into a temporary array before being copied to the object pointed to by *dest*.

Returned value

The memmove() function returns the value of dest.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memccpy() Copy bytes in memory" on page 76
- "memchr() Search buffer" on page 77
- "memcpy() Copy buffer" on page 78
- "memset() Set buffer to value" on page 79

memset() - Set buffer to value

Format

```
#include <string.h>
void *memset(void *dest, int c, size_t count);
```

General description

The memset() built-in function sets the first *count* bytes of *dest* to the value *c* converted to an unsigned int.

Returned value

memset() returns the value of dest.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memccpy() Copy bytes in memory" on page 76
- "memchr() Search buffer" on page 77
- "memcpy() Copy buffer" on page 78
- "memmove() Move buffer" on page 79

qsort() — Sort array

Format

General description

The qsort() function sorts an array of num elements, each of width bytes in size, where the first element of the array is pointed to by base.

The *compare* pointer points to a function, which you supply, that compares two array elements and returns an integer value specifying their relationship. The qsort() function calls the comparison function one or more times during the sort, passing pointers to two array elements on each call. The comparison function must compare the elements and return one of the following values:

Value

Meaning

< 0

element1 less than element2

0

element1 equal to element2

> 0

element1 greater than element2

The sorted array elements are stored in increasing order, as returned by the comparison function. You can sort in reverse order by reversing the "greater than" and "less than" logic in the comparison function. If two elements are equal, their order in the sorted array is unspecified. The qsort() function overwrites the contents of the array with the sorted elements.

Returned value

The qsort() function returns no values.

Related information

<u>"stdlib.h — Define standard library functions" on page 59</u>

rand() — Generate random number

Format

```
#include <stdlib.h>
int rand(void);
```

General Description

The rand() function generates a pseudo-random integer in the range 0 to RAND_MAX. Use the srand() function before calling rand() to set a seed for the random number generator. If you do not make a call to srand(), the default seed is 1.

Note: Use of this function requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

The rand() function returns the calculated value.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "rand_r() Pseudo-random number generator" on page 81
- "srand() Set Seed for rand() Function" on page 89

rand_r() — Pseudo-random number generator

Format

```
#include <stdlib.h>
int rand_r(unsigned int *seed);
```

General Description

The rand_r() function generates a sequence of pseudo-random integers in the range 0 to **RAND_MAX**. (The value of the **RAND_MAX** macro will be at least 32767.)

If rand_r() is called with the same initial value for the object pointed to by seed and that object is not modified between successive returns and calls to rand_r(), the same sequence shall be generated.

Returned Value

The rand_r() function returns a pseudo-random integer.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "rand() Generate random number" on page 80
- "srand() Set Seed for rand() Function" on page 89

realloc() — Change reserved storage block size

Format

```
#include <stdlib.h>
void *realloc(void *ptr, size_t size);
```

General Description

The realloc() function changes the size of a previously reserved storage block. The *ptr* argument points to the beginning of the block. The *size* argument gives the new size of the block in bytes. The contents of the block are unchanged up to the shorter of the new and old sizes.

If the *ptr* is NULL, realloc() reserves a block of storage of *size* bytes. It does not give all bits of each element an initial value of 0.

If size is 0 and ptr is not NULL, the storage pointed to by ptr is freed and NULL is returned.

If you use realloc() with a pointer that does not point to a *ptr* created previously by malloc(), calloc(), or realloc(), or if you pass *ptr* to storage already freed, you get undefined behavior—typically an exception.

If you ask for more storage, the contents of the extension are undefined and are not guaranteed to be 0.

The storage to which the returned value points is aligned for storage of any type of object.

Note: Use of realloc() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

If successful, realloc() returns a pointer to the reallocated storage block. The storage location of the block might be moved. Thus, the returned value is not necessarily the same as the *ptr* argument to realloc().

The returned value is NULL if *size* is 0. If there is not enough storage to expand the block to the given size, the original block is unchanged and a NULL pointer is returned.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "calloc() Reserve and initialize storage" on page 67
- "free() Free a block of storage" on page 71
- "malloc() Reserve storage block" on page 75
- "__malloc31() Allocate 31-bit storage" on page 76

snprintf() — Format and write data

Format

```
#include <stdio.h>
int snprintf(char *__restrict__ s, size_t n, const char *__restrict__ format, ...);
```

General Description

The snprintf() function formats and writes output to an array (specified by argument s). If n is zero, nothing is written, and s may be a null pointer. Otherwise, output characters beyond the n-1st are discarded rather than being written to the array, and a null character is written at the end of the characters actually written into the array. If copying takes place between objects that overlap, the behavior is undefined.

Note: Use of snprintf() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

The snprintf() function returns the number of characters that would have been written had n been sufficiently large, not counting the terminating null character, or a negative value if an encoding error

occurred. Thus, the null-terminated output has been completely written if and only if the returned value is nonnegative and less than n.

Related Information

- "stdio.h Define I/O related functions" on page 57
- "sprintf() Format and Write Data" on page 83
- "sscanf() Read and Format Data" on page 89

sprintf() — Format and Write Data

Format

```
#include <stdio.h>
int sprintf(char *__restrict__buffer, const char *__restrict__format-string, ...);
```


General Description

The sprintf() function formats and stores a series of characters and values in the array pointed to by buffer. Any argument-list is converted and put out according to the corresponding format specification in the format-string. If the strings pointed to by buffer and format-string overlap, behavior is undefined.

The format-string consists of ordinary characters, escape sequences, and conversion specifications. The ordinary characters are copied in order of their appearance. Conversion specifications, beginning with a percent sign (%) or the sequence (%n\$) where n is a decimal integer in the range [1,NL_ARGMAX], determine the output format for any argument-list following the format-string. The format-string can contain multibyte characters beginning and ending in the initial shift state. When the format-string includes the use of the optional prefix ll to indicate the size expected is a long long datatype then the corresponding value in the argument list should be a long long datatype if correct output is expected.

- If the %n\$ conversion specification is found, the value of the nth *argument* after the *format-string* is converted and output according to the conversion specification. Numbered arguments in the argument list can be referenced from *format-string* as many times as required.
- The *format-string* can contain either form of the conversion specification, that is, % or %n\$ but the two forms cannot be mixed within a single *format-string* except that %% can be mixed with the %n\$ form. When numbered conversion specifications are used, specifying the 'nth' argument requires that the first to (n-1)th arguments are specified in the *format-string*.

The format-string is read from left to right. When the first format specification is found, the value of the first argument after the format-string is converted and output according to the format specification. The second format specification causes the second argument after the format-string to be converted and output, and so on through the end of the format-string. If there are more arguments than there are format specifications, the extra arguments are evaluated and ignored. The results are undefined if there are not enough arguments for all the format specifications. The format specification is illustrated below.

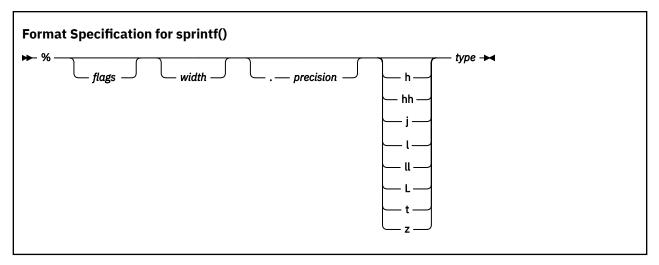

Each field of the format specification is a single character or number signifying a particular format option. The *type* character, which appears after the last optional format field, determines whether the associated argument is interpreted as a character, a string, a number, or pointer. The simplest format specification contains only the percent sign and a *type* character (for example, %s).

The percent sign: If a percent sign (%) is followed by a character that has no meaning as a format field, the character is simply copied to the *buffer*. For example, to print a percent sign character, use %%.

The flag characters: The *flag* characters in <u>Table 12 on page 84</u> are used for the justification of output and printing of thousands of grouping characters, signs, blanks, decimal-points, octal prefixes, and hexadecimal prefixes. Note that more than one *flag* can appear in a format specification. This is an optional field.

Table 12. Flag Characters for sprintf() Family				
Flag	Meaning	Default		
1	The integer portion of the result of a decimal conversion (%i,%d,%u, %f,%g or %G) will be formatted with the thousands' grouping characters.	No grouping.		
-	Left-justify the result within the field width.	Right-justify.		
+	Prefix the output value with a sign (+ or -) if the output value is of a signed type.	Sign appears only for negative signed values (-).		
blank(' ')	Prefix the output value with a blank if the output value is signed and positive. The + flag overrides the <i>blank</i> flag if both appear, and a positive signed	No blank.		

value will be output with a sign.

Table 12. I	Flag Characters	for sprintf()	Family	(continued)

Flag	Meaning	Default
#	When used with the o, x, or X formats, the # flag prefixes any nonzero output value with 0, 0x, or 0X, respectively.	No prefix.
	For o conversion, it increases the precision, if necessary, to force the first digit of the result to be a zero. If the value and precision are both 0, a single 0 is printed.	
	For e, E, f, F, g, and G conversion specifiers, the result always contains a decimal-point, even if no digits follow the decimal-point. Without this flag, a decimal-point appears in the result of these conversions only if a digit follows it.	
	For g and G conversion specifiers, do not remove trailing zeros from the result as they normally are. For other conversion specifiers, the behavior is undefined.	
0	When used with the d, i, o, u, x, X, e, E, f, F, g, or G conversion specifiers, leading zeros are used to pad to the field width. If the 0 and - flags both appear, the 0 flag is ignored.	Space padding.
	For d, i, o, u, \times , and X conversion specifiers, if a precision is specified, the 0 flag is ignored.	
	If the 0 and 'flags both appear, the grouping characters are inserted before zero padding. For other conversions, the behavior is undefined.	

The code point for the # character varies between the EBCDIC encoded character sets. The Metal C runtime library expects the # character to use the code point for encoded character set IBM-1047.

The # flag should not be used with c, d, i, u, s, or p types.

The Width of the Output: Definition of the *width* specification is as follows.

Width is a nonnegative decimal integer controlling the minimum number of characters printed. If the number of characters in the output value is less than the specified width, blanks are added on the left or the right (depending on whether the – flag is specified) until the minimum width is reached.

Width never causes a value to be truncated; if the number of characters in the output value is greater than the specified width, or width is not given, all characters of the value are output (subject to the precision specification).

The *width* specification can be an asterisk (*); if it is, an argument from the argument list supplies the value. The *width* argument must precede the value being formatted in the argument list. This is an optional field.

If format-string contains the %n\$ form of conversion specification, width can be indicated by the sequence *m\$, where m is a decimal integer in the range [1,NL_ARGMAX] giving the position of an integer argument in the argument list containing the field width.

The Precision of the Output: Definition of the precision specification is as follows.

The *precision* specification is a nonnegative decimal integer preceded by a period. It specifies the number of characters to be output, or the number of decimal places. Unlike the *width* specification, the *precision* can cause truncation of the output value.

The *precision* specification can be an asterisk (*); if it is, an argument from the argument list supplies the value. The *precision* argument must precede the value being formatted in the argument list. The *precision* field is optional.

If format-string contains the %n\$ form of conversion specification, precision can be indicated by the sequence *m\$, where m is a decimal integer in the range [1,NL_ARGMAX] giving the position of an integer argument in the argument list containing the field precision.

The interpretation of the *precision* value and the default when the *precision* is omitted depend upon the *type*, as shown in Table 13 on page 86.

T 11 40				
Table 13	Procision	Argument	ın	cnrintt()
Tuble 13.	1 166131011	$\Delta I \leq u I I I \leq I I I$	uι	301111111

Туре	Meaning	Default
d i o u x	Precision specifies the minimum number of digits to be output. If the number of digits in the argument is less than precision, the output value is padded on the left with zeros. The value is not truncated when the number of digits exceeds precision.	Default <i>precision</i> is 1. If <i>precision</i> is 0, or if the period (.) appears without a number following it, the <i>precision</i> is set to 0. When <i>precision</i> is 0, conversion of the value zero results in no characters.
С	No effect.	The character is output.
s	Precision specifies the maximum number of characters to be output. Characters in excess of precision are not output.	Characters are output until a NULL character is encountered.
e E f F	Precision specifies the number of digits to be output after the decimal-point. The last digit output is rounded.	Default <i>precision</i> is 6. If <i>precision</i> is 0 or the period appears without a number following it, no decimal-point is output.
g G	Precision specifies the maximum number of significant digits output.	All significant digits are output.

Optional prefix: Used to indicate the size of the argument expected.

h

A prefix with the integer types d, i, o, u, x, X means the integer is 16 bits long.

hh

Specifies that a following d, i, o, u, x, or X conversion specifier applies to a signed char or unsigned char argument (the argument will have been promoted according to the integer promotions, but its value shall be converted to signed char or unsigned char before printing); or that a following n conversion specifier applies to a pointer to a signed char argument.

- **j**Specifies that a following d, i, o, u, x, or X conversion specifier applies to an intmax_t or uintmax_t argument; or that a following n conversion specifier applies to a pointer to an intmax_t argument.
- 1 A prefix with d, i, o, u, x, X, and n types that specifies that the argument is a long int or unsigned long int.
- A prefix with the integer types d, i, o, u, x, X means the integer is 64 bits long.
- L
 A prefix with e, E, f, g, or G types that specifies that the argument is long double.

Specifies that a following d, i, o, u, x, or X conversion specifier applies to a ptrdiff_t or the corresponding unsigned type argument; or that a following n conversion specifier applies to a pointer to a ptrdiff_t argument.

Specifies that a following d, i, o, u, x, or X conversion specifier applies to a size_t or the corresponding signed integer type argument; or that a following n conversion specifier applies to a pointer to a signed integer type corresponding to a size_t argument.

Table 14 on page 87 below shows the meaning of the type characters used in the precision argument.

Table 14. Type Characters and their Meanings

Туре	Argument	Output Format
d, i	Integer	Signed decimal integer.
u	Integer	Unsigned decimal integer.
0	Integer	Unsigned octal integer.
х	Integer	Unsigned hexadecimal integer, using abcdef.
Х	Integer	Unsigned hexadecimal integer, using ABCDEF.
С	Character	Single character.
S	String	Characters output up to the first NULL character (\0) or until precision is reached.
n	Pointer to integer	Number of characters successfully output so far to the <i>stream</i> or buffer; this value is stored in the integer whose address is given as the argument.
р	Pointer	Pointer to void converted to a sequence of printable characters. See the individual system reference guides for the specific format.

Table 14. Type Characters and their Meanings (continued) Type Argument Output Format		
Туре	Argument	Output Format
f, F	Double	Signed value having the form [-]dddd.dddd, where dddd is one or more decimal digits. The number of digits before the decimal-point depends on the magnitude of the number. The number of digits after the decimal-point is equal to the requested precision. If the precision is explicitly zero and no # is present, no decimal-point appears. If a decimal-point appears, at least one digit appears before it.
		Convert a double argument representing an infinity in [+/-]inf: a plus or minus sign with the character sequence inf, followed by a white space character (space, tab, or newline), a NULL character (\0), or EOF.
		Convert a double argument representing a NaN in one of the styles:
		• [+/-]nan(n) for a signaling nan.
		 [+/-nanq(n)] for a quiet nan, where n is an integer and 1<= n<= INT_MAX-1.
		The value of n is determined by the fraction bits of the NaN argument value. For a signaling NaN value, NaN fraction bits are reversed (left to right) to produce bits (right to left) of an even integer value, 2*n. For a quiet NaN value, NaN fraction bits are reversed (left to right) to produce bits (right to left) of an odd integer value, 2*n-1.
		The F conversion specifier produces INFe, NANS, or NANQ instead of infQ, nans or, nanq respectively.
e, E	Double	Signed value having the form [-]d.dddde[sign]ddd:
		• d is a single-decimal digit.
		dddd is one or more decimal digits.
		ddd is 2 or more decimal digits.
		• sign is + or
		If the <i>precision</i> is zero and no # flag is present, no decimal-point appears. The conversion specifier produces a number with E instead of e to introduce the exponent.
		A double argument representing an infinity or NaN is converted in the style of an f or F conversion specifier.
g, G	Double	Signed value output in f or e format (or in the F or E format in the case of a G conversion specifier). The e or E format is used only when the exponent of the value is less than -4 or greater than or equal to the <i>precision</i> . Trailing zeros are truncated, and the decimal-point appears only if one or more digits follow it or a # flag is present.
		A double argument representing an infinity or NaN is converted in the style of an f or F conversion specifier.

Returned Value

If successful, sprintf() returns the number of characters output. The ending NULL character is not counted.

If unsuccessful, sprintf() returns a negative value.

Related Information

- "stdio.h Define I/O related functions" on page 57
- "snprintf() Format and write data" on page 82
- "sscanf() Read and Format Data" on page 89

srand() — Set Seed for rand() Function

Format

```
#include <stdlib.h>
void srand(unsigned int seed);
```

General Description

The srand() function uses its argument seed as a seed for a new sequence of pseudo-random numbers to be returned by subsequent calls to rand(). If srand() is not called, the rand() seed is set as if srand(1) was called at program start. Any other value for seed sets the generator to a different starting point. The rand() function generates pseudo-random numbers.

Some people find it convenient to use the return value of the time() function as the argument to srand(), as a way to ensure random sequences of random numbers.

Note: Use of srand() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

srand() returns no values.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "rand() Generate random number" on page 80
- "rand_r() Pseudo-random number generator" on page 81

sscanf() — Read and Format Data

Format

```
#include <stdio.h>
int sscanf(const char *__restrict__buffer, const char *__restrict__format-string, ...);
```

General Description

The sscanf() function reads data from *buffer* into the locations given by argument-list. If the strings pointed to by *buffer* and *format-string* overlap, behavior is undefined.

Each entry in the argument list must be a pointer to a variable of a type that matches the corresponding conversion specification in *format-string*. If the types do not match, the results are undefined.

The *format-string* controls the interpretation of the argument list. The *format-string* can contain multibyte characters beginning and ending in the initial shift state.

The format string pointed to by format-string can contain one or more of the following:

- White space characters, as specified by isspace(), such as blanks and newline characters. A white space character causes sscanf() to read, but not to store, all consecutive white space characters in the input up to the next character that is not white space. One white space character in *format-string* matches any combination of white space characters in the input.
- Characters that are not white space, except for the percent sign character (%). A non-white space character causes sscanf() to read, but not to store, a matching non-white space character. If the next character in the input stream does not match, the function ends.
- Conversion specifications which are introduced by the percent sign (%) or the sequence (%n\$) where n is a decimal integer in the range [1,NL_ARGMAX]. A conversion specification causes sscanf() to read and convert characters in the input into values of a conversion specifier. The value is assigned to an argument in the argument list.

sscanf() reads *format-string* from left to right. Characters outside of conversion specifications are expected to match the sequence of characters in the input stream; the matched characters in the input stream are scanned but not stored. If a character in the input stream conflicts with *format-string*, the function ends, terminating with a "matching" failure. The conflicting character is left in the input stream as if it had not been read.

When the first conversion specification is found, the value of the first *input field* is converted according to the conversion specification and stored in the location specified by the first entry in the argument list. The second conversion specification converts the second input field and stores it in the second entry in the argument list, and so on through the end of *format-string*.


When the %n\$ conversion specification is found, the value of the *input field* is converted according to the conversion specification and stored in the location specified by the nth argument in the argument list. Numbered arguments in the argument list can only be referenced once from *format-string*.

The *format-string* can contain either form of the conversion specification, that is, % or %n\$ but the two forms cannot be mixed within a single *format-string* except that %% or %* can be mixed with the %n\$ form.

An input field is defined as:

- All characters until a white space character (space, tab, or newline) is encountered
- All characters until a character is encountered that cannot be converted according to the conversion specification
- All characters until the field width is reached.

If there are too many arguments for the conversion specifications, the extra arguments are evaluated but otherwise ignored. The results are undefined if there are not enough arguments for the conversion specifications.

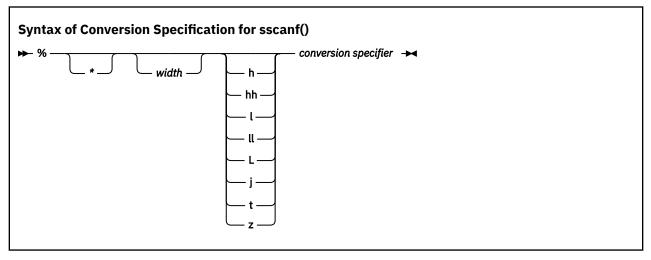

Each field of the conversion specification is a single character or a number signifying a particular format option. The *conversion specifier*, which appears after the last optional format field, determines whether

the input field is interpreted as a character, a string, or a number. The simplest conversion specification contains only the percent sign and a *conversion specifier* (for example, %s).

Each field of the format specification is discussed in detail below.

Other than conversion specifiers, avoid using the percent sign (%), except to specify the percent sign: %%. Currently, the percent sign is treated as the start of a conversion specifier. Any unrecognized specifier is treated as an ordinary sequence of characters. If, in the future, z/OS XL C/C++ permits a new conversion specifier, it could match a section of your format string, be interpreted incorrectly, and result in undefined behavior. See Table 15 on page 92 for a list of conversion specifiers.

An asterisk (*) following the percent sign suppresses assignment of the next input field, which is interpreted as a field of the specified *conversion specifier*. The field is scanned but not stored.

width is a positive decimal integer controlling the maximum number of characters to be read. No more than width characters are converted and stored at the corresponding argument.

Fewer than *width* characters are read if a white space character (space, tab, or newline), or a character that cannot be converted according to the given format occurs before *width* is reached.

The optional prefix 1 shows that you use the long version of the following conversion specifier, while the prefix h indicates that the short version is to be used. The corresponding argument should point to a long or double object (for the l character), a long double object (for the L character), or a short object (with the h character). The l and h modifiers can be used with the d, i, o, x, and u conversion specifiers. The l and h modifiers are ignored if specified for any other conversion specifier.

Optional prefix: Used to indicate the size of the argument expected.

h

Specifies that a following d, i, o, u, x, X, or n conversion specifier applies to an argument with type pointer to short or unsigned short.

hh

Specifies that a following d, i, o, u, x, X or n conversion specifier applies to an argument with type pointer to signed char or unsigned char.

- **j**Specifies that a following d, i, o, u, x, X or n conversion specifier applies to an argument with type pointer to intmax_t or uintmax_t.
- 1 Specifies that a following e, E, f, F, g, or G conversion specifier applies to an argument with type pointer to double.
- 11

Specifies that a following d, i, o, u, x, X or n conversion specifier applies to an argument with type pointer to long long or unsigned long long.

- L Specifies that a following e, E, f, g, or G conversion specifier applies to an argument with type pointer to long double.
- **t**Specifies that a following d, i, o, u, x, X or n conversion specifier applies to an argument with type pointer to ptrdiff_t or the corresponding unsigned type.
- **z**Specifies that a following d, i, o, u, x, X or n conversion specifier applies to an argument with type pointer to size_t or the corresponding signed integer type.

The *type* characters and their meanings are in Table 15 on page 92.

Table 15. Con	Table 15. Conversion Specifiers in sscanf()		
Conversion Specifier	Type of Input Expected	Type of Argument	
d	Decimal integer	Pointer to int	
0	Octal integer	Pointer to unsigned int	
X X	Hexadecimal integer	Pointer to unsigned int	
i	Decimal, hexadecimal, or octal integer	Pointer to int	
u	Unsigned decimal integer	Pointer to unsigned int	
С	Sequence of one or more characters as specified by field width; white space characters that are ordinarily skipped are read when %c is specified. No terminating null is added.	Pointer to char large enough for input field.	
S	Like c, a sequence of bytes of type char (signed or unsigned), except that white space characters are not allowed, and a terminating null is always added.	Pointer to character array large enough for input field, plus a terminating NULL character (\0) that is automatically appended.	
n	No input read from <i>stream</i> or buffer.	Pointer to int, into which is stored the number of characters successfully read from the <i>stream</i> or buffer up to that point in the call to either fscanf() or to scanf().	
р	Pointer to void converted to series of characters. For the specific format of the input, see the individual system reference guides.	Pointer to void.	

Table 15. Conv	Table 15. Conversion Specifiers in sscanf() (continued)			
Conversion Specifier	Type of Input Expected	Type of Argument		
[A non-empty sequence of bytes to be matched against a set of expected bytes (the <i>scanset</i>), which form the conversion specification. White space characters that are ordinarily skipped are read when %[is specified.	Pointer to the initial byte of an array of char, signed char, or unsigned char large enough to		
	Consider the following situations:	accept the sequence and a terminating byte,		
	[^ <i>bytes</i>]. In this case, the scanset contains all bytes that do not appear between the circumflex and the right square bracket.	which will be added automatically.		
	[]abc] or [^]abc.] In both these cases the right square bracket is included in the scanset (in the first case:]abc and in the second case, not]abc)			
	[a–z] In EBCDIC The – is in the scanset, the characters b through y are <i>not</i> in the scanset; in ASCII The – is <i>not</i> in the scanset, the characters b through y are.			
	The code point for the square brackets ([and]) and the caret (^) vary among the EBCDIC encoded character sets. The default C locale expects these characters to use the code points for encoded character set Latin-1 / Open Systems 1047. Conversion proceeds one byte at a time: there is no conversion to wide characters.			
e E f F g G	Floating-point value consisting of an optional sign (+ or -), a series of one or more decimal digits possibly containing a decimal-point, and an optional exponent (e or E) followed by a possibly signed integer value.	Pointer to float		

The format string passed to sscanf() must be encoded as IBM-1047.

To read strings not delimited by space characters, substitute a set of characters in square brackets ([]) for the s (string) conversion specifier. The corresponding input field is read up to the first character that does not appear in the bracketed character set. If the first character in the set is a logical not (\neg), the effect is reversed: the input field is read up to the first character that does appear in the rest of the character set.

To store a string without storing an ending NULL character ($\setminus 0$), use the specification % α c, where α is a decimal integer. In this instance, the c conversion specifier means that the argument is a pointer to a character array. The next α characters are read from the input stream into the specified location, and no NULL character is added.

The input for a %x conversion specifier is interpreted as a hexadecimal number.

The sscanf() function scans each input field character by character. It might stop reading a particular input field either before it reaches a space character, when the specified *width* is reached, or when the next character cannot be converted as specified. When a conflict occurs between the specification and the input character, the next input field begins at the first unread character. The conflicting character, if there is one, is considered unread and is the first character of the next input field or the first character in subsequent read operations on the input stream.

The sscanf family functions match e, E, f, F, g or, G conversion specifiers to floating-point number substrings in the input stream. The sscanf family functions convert each input substring matched by an e,

E, f, F, g, or G conversion specifier to a float, double or long double value depending on the size modifier before the e, E, f, F, g, or G conversion specifier.

Many z/OS Metal C formatted input functions, including the sscanf family of functions, use the IEEE binary floating-point format and recognize special infinity and NaN floating-point number input sequences.

- The special sequence for infinity input is [+/-]inf or [+/-]INF, where + or is optional.
- The special sequence of NaN input is either [+/-]nan(n) for a signaling nan or [+/-nanq(n)] for a quiet nan, where n is an integer and 1<= n <= INT_MAX-1. If (n) is omitted, n is assumed to be 1. The value of n determines what IEEE binary floating-point NaN fraction bits are produced by the formatted input functions. For a signaling NaN, these functions produce NaN fraction bits (left to right) by reversing the bits (right to left) of the even integer value 2*n. For a quiet NaN, they produce NaN fraction bits (left to right) by reversing the bits (right to left) of the odd integer value 2*n-1.

Returned Value

The sscanf() function returns the number of input items that were successfully matched and assigned. The returned value does not include conversions that were performed but not assigned (for example, suppressed assignments). The functions return EOF if there is an input failure before any conversion, or if EOF is reached before any conversion. Thus a returned value of 0 means that no fields were assigned: there was a matching failure before any conversion.

Related Information

- "stdio.h Define I/O related functions" on page 57
- "snprintf() Format and write data" on page 82
- "sprintf() Format and Write Data" on page 83
- "vsnprintf() Format and print data to fixed length buffer" on page 115
- "vsscanf() Format Input of a STDARG Argument List" on page 116

strcat() — Concatenate Strings

Format

```
#include <string.h>
char *strcat(char * __restrict__string1, const char * __restrict__string2);
```

General Description

The strcat() built-in function concatenates *string2* with *string1* and ends the resulting string with the NULL character. In other words, strcat() appends a copy of the string pointed to by *string2*—including the terminating NULL byte— to the end of a string pointed to by *string1*, with its last byte (that is, the terminating NULL byte of *string1*) overwritten by the first byte of the appended string.

Do not use a literal string for a string1 value, although string2 might be a literal string.

If the storage of *string1* overlaps the storage of *string2*, the behavior is undefined.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

The strcat() built-in function returns the value of string1, the concatenated string.

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strcspn() Compare Strings" on page 97
- "strncat() Concatenate Strings" on page 99

strchr() — Search for Character

Format

```
#include <string.h>
char *strchr(const char *string, int c);
```

General Description

The strchr() built-in function finds the first occurrence of c converted to char, in the string *string. The character c can be the NULL character (\0); the ending NULL character of string is included in the search.

The strchr() function operates on NULL-terminated strings. The string argument to the function *must* contain a NULL character (\0) marking the end of the string.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the METAL SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

If successful, strchr() returns a pointer to the first occurrence of c (converted to a character) in *string*. If the character is not found, strchr() returns a NULL pointer.

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "memchr() Search buffer" on page 77
- "strcat() Concatenate Strings" on page 94
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strcspn() Compare Strings" on page 97
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101

- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strcmp() — Compare Strings

Format

```
#include <string.h>
int strcmp(const char *string1, const char *string2);
```

General Description

The strcmp() built-in function compares the string pointed to by *string1* to the string pointed to by *string2* The string arguments to the function must contain a NULL character (\0) marking the end of the string.

The relation between the strings is determined by subtracting: string2[i] - string2[i], as i increases from 0 to strlen of the smaller string. The sign of a nonzero return value is determined by the sign of the difference between the values of the first pair of bytes (both interpreted as type unsigned char) that differ in the strings being compared. This function is not locale-sensitive.

Returned Value

strcmp() returns a value indicating the relationship between the strings, as listed below.

Value

Meaning

< 0

String pointed to by string1 less than string pointed to by string2

= 0

String pointed to by string1 equivalent to string pointed to by string2

> 0

String pointed to by string1 greater than string pointed to by string2

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memcmp() Compare bytes" on page 77
- "strcspn() Compare Strings" on page 97
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strcpy() — Copy String

Format

```
#include <string.h>
char *strcpy(char * __restrict__string1, const char * __restrict__string2);
```

General Description

The strcpy() built-in function copies *string2*, including the ending NULL character, to the location specified by *string1*. The *string2* argument to strcpy() must contain a NULL character (\0) marking the end of the string. You cannot use a literal string for a *string1* value, although *string2* may be a literal string. If the two objects overlap, the behavior is undefined.

Returned Value

The strcpy() function returns the value of string1.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "memcpy() Copy buffer" on page 78
- "strcat() Concatenate Strings" on page 94
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcspn() Compare Strings" on page 97
- "strncpy() Copy String" on page 100
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strcspn() — Compare Strings

Format

```
#include <string.h>
size_t strcspn(const char *string1, const char *string2);
```

General Description

The strcspn() function computes the length of the initial portion of the string pointed to by *string1* that contains no characters from the string pointed to by *string2*.

Returned Value

The strcspn() function returns the calculated length of the initial portion found.

- "string.h Declare string manipulation functions" on page 60
- "strcat() Concatenate Strings" on page 94
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strdup() - Duplicate a String

Format

```
#include <string.h>
char *strdup(const char *string);
```

General Description

The strdup() function creates a duplicate of the string pointed to by string.

Note: Use of this function requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

If successful, strdup() returns a pointer to a new string which is a duplicate of string.

Otherwise, strdup() returns a NULL pointer.

Note: The caller of strdup() should free the storage obtained for the string.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "free() Free a block of storage" on page 71
- "malloc() Reserve storage block" on page 75

strlen() — Determine String Length

Format

```
#include <string.h>
size_t strlen(const char *string);
```

General Description

The strlen() built-in function determines the length of string pointed to by *string*, excluding the terminating NULL character.

Returned Value

The strlen() function returns the length of string.

- "string.h Declare string manipulation functions" on page 60
- "strncat() Concatenate Strings" on page 99
- "strncmp() Compare Strings" on page 99
- "strncpy() Copy String" on page 100

strncat() - Concatenate Strings

Format

```
#include <string.h>
char *strncat(char * __restrict__string1,
const char * __restrict__string2, size_t count);
```

General Description

The strncat() built-in function appends the first *count* characters of *string2* to *string1* and ends the resulting string with a NULL character (\0). If *count* is greater than the length of *string2*, strncat() appends only the maximum length of *string2* to *string1*. The first character of the appended string overwrites the terminating NULL character of the string pointed to by *string1*.

If copying takes place between overlapping objects, the behavior is undefined.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

The strncat() function returns the value *string1*, the concatenated string.

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "strcat() Concatenate Strings" on page 94
- "strncmp() Compare Strings" on page 99
- "strncpy() Copy String" on page 100
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strncmp() — Compare Strings

Format

```
#include <string.h>
int strncmp(const char *string1, const char *string2, size_t count);
```

General Description

The strncmp() built-in function compares at most the first *count* characters of the string pointed to by *string1* to the string pointed to by *string2*.

The string arguments to the function should contain a NULL character (\0) marking the end of the string.

The relation between the strings is determined by the sign of the difference between the values of the leftmost first pair of characters that differ. The values depend on character encoding. This function is *not* locale sensitive.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

The strncmp() function returns a value indicating the relationship between the sub-strings, as follows:

Value

Meaning

< 0

String pointed to by substring1 less than string pointed to by substring2

= 0

String pointed to by substring1 equivalent to string pointed to by substring2

> 0

String pointed to by substring1 greater than string pointed to by substring2

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "memcmp() Compare bytes" on page 77
- "strcmp() Compare Strings" on page 96
- "strcspn() Compare Strings" on page 97
- "strncat() Concatenate Strings" on page 99
- "strncpy() Copy String" on page 100
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strncpy() — Copy String

Format

```
#include <string.h>
char *strncpy(char * __restrict__string1,
const char * __restrict__string2, size_t count);
```

General Description

The strncpy() built-in function copies at most *count* characters of *string2* to *string1*. If *count* is less than or equal to the length of *string2*, a NULL character (\0) is *not* appended to the copied string. If *count* is greater than the length of *string2*, the *string1* result is padded with NULL characters (\0) up to length *count*.

If copying takes place between objects that overlap, the behavior is undefined.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

The strncpy() function returns *string1*.

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "memcpy() Copy buffer" on page 78
- "strcpy() Copy String" on page 96
- "strncat() Concatenate Strings" on page 99
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strpbrk() — Find Characters in String

Format

```
#include <string.h>
char *strpbrk(const char *string1, const char *string2);
```

General Description

The strpbrk() function locates the first occurrence in the string pointed to by *string1* of any character from the string pointed to by *string2*.

Returned Value

If successful, strpbrk() returns a pointer to the character.

If string1 and string2 have no characters in common, strpbrk() returns a NULL pointer.

- "string.h Declare string manipulation functions" on page 60
- "strchr() Search for Character" on page 95
- "strcspn() Compare Strings" on page 97
- "strncmp() Compare Strings" on page 99
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strrchr() - Find Last Occurrence of Character in String

Format

```
#include <string.h>
char *strrchr(const char *string, int c);
```

General Description

The strrchr() function finds the last occurrence of c (converted to a char) in string. The ending NULL character is considered part of the string.

Note: When **COMPACT** is specified, the compiler does not generate inline code for this function. In this case, you need to take either of the following actions:

- Define the __METAL_SYSVEC feature test macro to use the system library.
- Define the __METAL_STATIC feature test macro to use the static object library and bind in corresponding data set.

Returned Value

If successful, strrchr() returns a pointer to the last occurrence of c in string.

If the given character is not found, strrchr() returns a NULL pointer.

Related Information

- "System and static object libraries" on page 61
- "string.h Declare string manipulation functions" on page 60
- "memchr() Search buffer" on page 77
- "strchr() Search for Character" on page 95
- "strcspn() Compare Strings" on page 97
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101
- "strspn() Search String" on page 102

strspn() - Search String

Format

```
#include <string.h>
size_t strspn(const char *string1, const char *string2);
```

General Description

The strspn() function calculates the length of the maximum initial portion of the string pointed to by *string1* that consists entirely of the characters contained in the string pointed to by *string2*.

Returned Value

The strspn() function returns the length of the substring found.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "strcat() Concatenate Strings" on page 94
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strcspn() Compare Strings" on page 97
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102

strstr() — Locate Substring

Format

```
#include <string.h>
char *strstr(const char *string1, const char *string2);
```

General Description

The strstr() function finds the first occurrence of the string pointed to by *string2* (excluding the NULL character) in the string pointed to by *string1*.

Returned Value

If successful, strstr() returns a pointer to the beginning of the first occurrence of string2 in string1.

If string2 does not appear in string1, strstr() returns NULL.

If string2 points to a string with zero length, strstr() returns string1.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcspn() Compare Strings" on page 97
- "strncmp() Compare Strings" on page 99
- "strpbrk() Find Characters in String" on page 101
- "strrchr() Find Last Occurrence of Character in String" on page 102
- "strspn() Search String" on page 102

strtod — Convert Character String to Double

Format

```
#include <stdlib.h>
double strtod(const char * __restrict__nptr, char ** __restrict__endptr);
```

General Description

The strtod() function converts part of a character string, pointed to by *nptr*, to a double. The parameter *nptr* points to a sequence of characters that can be interpreted as a numerical value of the type double.

The strtod() function breaks the string into three parts:

- 1. An initial, possibly empty, sequence of white-space characters, as specified by isspace().
- 2. A subject sequence interpreted as a floating-point constant or representing infinity or a NAN.
- 3. A final string of one or more unrecognized characters, including the terminating null byte of the input string.

The subject string is the longest string that matches the expected form.

The expected form of the subject sequence is an optional plus or minus sign with one of the following parts:

- A non-empty sequence of decimal digits optionally containing a radix character followed by an optional exponent part. A radix character is the character that separates the integer part of a number from the fractional part.
- A 0x or 0X, a non-empty sequence of hexadecimal digits optionally containing a radix character, a base 2 decimal exponent part with a p or P as prefix, a plus or minus sign, and then a sequence of at least one decimal digit, for example, [-]0xh.hhhhp+/-d.
- An INF, ignoring case.
- One of NANQ or NANQ(n), ignoring case.
- One of NANS or NANS(n), ignoring case.
- One of NAN or NAN(n), ignoring case.

See "sscanf() — Read and Format Data" on page 89 for a description of special infinity and NAN sequences recognized by z/OS Metal C.

The pointer to the last string that was successfully converted is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer. If the subject string is empty or it does not have the expected form, no conversion is performed. The value of *nptr* is stored in the object pointed to by *endptr*.

Returned Value

If successful, strtod() returns the value of the floating-point number in IEEE Binary Floating-Point format.

In an overflow, strtod() returns +/-HUGE_VAL. In an underflow, it returns 0. If no conversion is performed, strtod() returns 0.

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "sscanf() Read and Format Data" on page 89
- "strtol() Convert Character String to Long" on page 107
- "strtof Convert Character String to Float" on page 105
- "strtold Convert Character String to Long Double" on page 108
- "strtoul() Convert String to Unsigned Integer" on page 111
- "vsscanf() Format Input of a STDARG Argument List" on page 116

strtof — Convert Character String to Float

Format

```
#include <stdlib.h>
float strtof(const char * __restrict__nptr, char ** __restrict__endptr);
```

General Description

The strtof() function converts part of a character string, pointed to by *nptr*, to a float. The parameter *nptr* points to a sequence of characters that can be interpreted as a numerical value of the type float.

The strtof() function breaks the string into three parts:

- 1. An initial, possibly empty, sequence of white-space characters, as specified by isspace().
- 2. A subject sequence interpreted as a floating-point constant or representing infinity or a NAN.
- 3. A final string of one or more unrecognized characters, including the terminating null byte of the input string.

The subject string is the longest string that matches the expected form.

The expected form of the subject sequence is an optional plus or minus sign with one of the following parts:

- A non-empty sequence of decimal digits optionally containing a radix character followed by an optional
 exponent part. A radix character is the character that separates the integer part of a number from the
 fractional part.
- A 0x or 0X, a non-empty sequence of hexadecimal digits optionally containing a radix character, a base 2 decimal exponent part with a p or P as prefix, a plus or minus sign, and then a sequence of at least one decimal digit, for example, [-]0xh.hhhhp+/-d.
- · An INF, ignoring case.
- One of NANQ or NANQ(n), ignoring case.
- One of NANS or NANS(n), ignoring case.
- One of NAN or NAN(n), ignoring case.

In z/OS Metal C, represent the radix character as a period (.).

See "sscanf() — Read and Format Data" on page 89 for a description of special infinity and NAN sequences recognized by z/OS Metal C.

The pointer to the last string that was successfully converted is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer. If the subject string is empty or it does not have the expected form, no conversion is performed. The value of *nptr* is stored in the object pointed to by *endptr*.

Returned Value

If successful, strtof() returns the value of the floating-point number in IEEE Binary Floating-Point format.

In an overflow, strtof() returns +/-HUGE_VALF. In an underflow, it returns 0. If no conversion is performed, strtof() returns 0.

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "sscanf() Read and Format Data" on page 89

- "strtod Convert Character String to Double" on page 103
- "strtol() Convert Character String to Long" on page 107
- "strtold Convert Character String to Long Double" on page 108
- "strtoul() Convert String to Unsigned Integer" on page 111
- "vsscanf() Format Input of a STDARG Argument List" on page 116

strtok() - Tokenize String

Format

```
#include <string.h>
char *strtok(char * __restrict__string1, const char * __restrict__string2);
```

General Description

The strtok() function breaks a character string, pointed to by *string*, into a sequence of tokens. The tokens are separated from one another by the characters in the string pointed to by *string2*.

The token starts with the first character not in the string pointed to by *string2*. If such a character is not found, there are no tokens in the string. strtok() returns a NULL pointer. The token ends with the first character contained in the string pointed to by *string2*. If such a character is not found, the token ends at the terminating NULL character. Subsequent calls to strtok() will return the NULL pointer. If such a character *is* found, then it is overwritten by a NULL character, which terminates the token.

If the next call to strtok() specifies a NULL pointer for *string1*, the tokenization resumes at the first character following the found and overwritten character from the previous call. For example:

Note: To use the strtok() function, set up an environment by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

The first time strtok() is called, it returns a pointer to the first token in *string1*. In later calls with the same token string, strtok() returns a pointer to the next token in the string. A NULL pointer is returned when there are no more tokens. All tokens are NULL-terminated.

- "string.h Declare string manipulation functions" on page 60
- "strcat() Concatenate Strings" on page 94
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strcspn() Compare Strings" on page 97
- "strspn() Search String" on page 102

strtok_r() — Split String into Tokens

Format

```
#define _XOPEN_SOURCE 500
#include <string.h>
char *strtok_r(char *s, const char *sep, char **lasts);
```

General Description

The function strtok_r() considers the NULL-terminated string s as a sequence of zero or more text tokens separated by spans of one or more characters from the separator string sep. The argument *lasts* points to a user-provided pointer which points to stored information necessary for strtok_r() to continue scanning the same string.

In the first call to strtok_r(), s points to a NULL-terminated string, sep to a NULL-terminated string of separator characters and the value pointed to by *lasts* is ignored. The function strtok_r() returns a pointer to the first character of the first token, writes a NULL character into s immediately following the returned token, and updates the pointer to which *lasts* points.

In subsequent calls, s is a NULL pointer and *lasts* will be unchanged from the previous call so that subsequent calls will move through the string s, returning successive tokens until no tokens remain. The separator string sep may be different from call to call. When no token remains in s, a NULL pointer is returned.

Note: To use the strtok_r() function, set up an environment by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.

Returned Value

If successful, strtok_r() returns a pointer to the token found.

When no token is found, strtok_r() returns a NULL pointer.

Related Information

- "string.h Declare string manipulation functions" on page 60
- "strcat() Concatenate Strings" on page 94
- "strchr() Search for Character" on page 95
- "strcmp() Compare Strings" on page 96
- "strcpy() Copy String" on page 96
- "strcspn() Compare Strings" on page 97
- "strspn() Search String" on page 102

strtol() — Convert Character String to Long

Format

```
#include <stdlib.h>
long int strtol(const char * __restrict__nptr,
char ** __restrict__endptr, int base);
```

General Description

The strtol() function converts *nptr*, a character string, to a long int value.

The function decomposes the entire string into three parts:

- 1. A sequence of white space characters as defined by the IBM-1047 codepage.
- 2. A sequence of characters interpreted as integer in some base notation. This is the *subject sequence*.
- 3. A sequence of unrecognized characters.

The base notation is determined by *base*, if base is greater than zero. If base is zero, the base notation is determined by the format of the sequence of characters that follow an optional plus—or optional minus—sign.

10

Sequence starts with nonzero decimal digit.


8 Sequence starts with 0, followed by a sequence of digits with values from 0 to 7.

16

Sequence starts with either 0x or 0X, followed by digits, and letters A through F or a through f.

If the base is greater than zero, the subject sequence contains decimal digits and letters, possibly preceded by either a plus or a minus sign. The letters a (or A) through z (or Z) represent values from 10 through 36, but only those letters whose value is less than the value of the base are allowed.

When you use the strtol() function, nptr should point to a string with the following form:



The pointer to the converted characters, even if conversion was unsuccessful, is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer.

Returned Value

If successful, strtol() returns the converted long int value.

If unsuccessful, strtol() returns 0 if no conversion could be performed. If the correct value is outside the range of representable values, strtol() returns LONG_MAX or LONG_MIN, according to the sign of the value. If the value of base is not supported, strtol() returns 0.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "atoll() Convert character string to signed long long" on page 66
- "sscanf() Read and Format Data" on page 89
- "strtoul() Convert String to Unsigned Integer" on page 111

strtold — Convert Character String to Long Double

Format

```
#include <stdlib.h>
long double strtold(const char *__restrict__ nptr, char **__restrict__ endptr);
```

General Description

The strtold() function converts part of a character string, pointed to by *nptr*, to long double. The parameter *nptr* points to a sequence of characters that can be interpreted as a numerical value of the type long double.

The strtold() function breaks the string into three parts:

- 1. An initial, possibly empty, sequence of white-space characters, as specified by isspace().
- 2. A subject sequence interpreted as a floating-point constant or representing infinity or a NAN.
- 3. A final string of one or more unrecognized characters, including the terminating null byte of the input string.

The function then attempts to convert the subject string into the floating-point number, and returns the result

The expected form of the subject sequence is an optional plus or minus sign with one of the following parts:

- A non-empty sequence of decimal digits optionally containing a radix character followed by an optional
 exponent part. A radix character is the character that separates the integer part of a number from the
 fractional part.
- A 0x or 0X, a non-empty sequence of hexadecimal digits optionally containing a radix character, a base 2 decimal exponent part with a p or P as prefix, a plus or minus sign, and then a sequence of at least one decimal digit, for example, [-]0xh.hhhhp+/-d.
- · An INF, ignoring case.
- One of NANQ or NANQ(n), ignoring case.
- One of NANS or NANS(n), ignoring case.
- One of NAN or NAN(n), ignoring case.

See "sscanf() — Read and Format Data" on page 89 for a description of special infinity and NAN sequences recognized by z/OS Metal C.

The pointer to the last string that was successfully converted is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer. If the subject string is empty or it does not have the expected form, no conversion is performed. The value of *nptr* is stored in the object pointed to by *endptr*.

Returned Value

If successful, strtold() returns the value of the floating-point number in IEEE Binary Floating-Point format.

In an overflow, strtold() returns +/-HUGE_VAL. In an underflow, it returns 0. If no conversion is performed, strtold() returns 0.

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "sscanf() Read and Format Data" on page 89
- "strtod Convert Character String to Double" on page 103
- "strtof Convert Character String to Float" on page 105
- "strtol() Convert Character String to Long" on page 107
- "strtoul() Convert String to Unsigned Integer" on page 111
- "vsscanf() Format Input of a STDARG Argument List" on page 116

strtoll() - Convert String to Signed Long Long

Format

```
#include <stdlib.h>
long long strtoll(const char * __restrict__ nptr,
char ** __restrict__ endptr, int base);
```

Compile Requirement: Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language</u> Reference for information about how to make long long available.

General Description

The strtoll() function converts *nptr*, a character string, to a signed long long value.

The function decomposes the entire string into three parts:

- 1. A sequence of white space characters as defined by the IBM-1047 codepage.
- 2. A sequence of characters interpreted as an unsigned integer in some base notation. This is the *subject* sequence.
- 3. A sequence of unrecognized characters.

The base notation is determined by *base*, if *base* is greater than zero. If *base* is zero, the base notation is determined by the format of the sequence of characters that follow an optional plus or optional minus sign.

10

Sequence starts with nonzero decimal digit.

8


Sequence starts with 0, followed by a sequence of digits with values from 0 to 7.

16

Sequence starts with either 0x or 0X, followed by digits, and letters A through F or a through f.

If the base is greater than zero, the subject sequence contains decimal digits and letters, possibly preceded by either a plus or a minus sign. The letters a (or A) through z (or Z) represent values from 10 through 36, but only those letters whose value is less than the value of the base are allowed.

When you are using strtoll(), nptr should point to a string with the following form:



The pointer to the converted characters, even if conversion was unsuccessful, is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer.

Returned Value

If successful, strtoll() returns the converted signed long long value, represented in the string.

If unsuccessful, strtoll() returns 0 if no conversion could be performed. If the correct value is outside the range of representable values, strtoll() returns LLONG_MAX (LONGLONG_MAX) or LLONG_MIN (LONGLONG_MIN), according to the sign of the value. If the value of base is not supported, strtoll() returns 0.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "atoll() Convert character string to signed long long " on page 66
- "sscanf() Read and Format Data" on page 89
- "strtoul() Convert String to Unsigned Integer" on page 111

strtoul() — Convert String to Unsigned Integer

Format

```
#include <stdlib.h>
unsigned long int strtoul(const char * __restrict__ string1,
char ** __restrict__ string2, int base);
```

General Description

The strtoul() function converts string1, a character string, to an unsigned long int value.

The function decomposes the entire string into three parts:

- 1. A sequence of white space characters as defined by the IBM-1047 codepage.
- 2. A sequence of characters interpreted as an unsigned integer in some base notation. This is the *subject* sequence.
- 3. A sequence of unrecognized characters.

The base notation is determined by base, if base is greater than zero. If base is zero, the base notation is determined by the format of the sequence of characters that follow an optional plus or optional minus sign.

10

Sequence starts with nonzero decimal digit.

8


Sequence starts with 0, followed by a sequence of digits with values from 0 to 7.

16

Sequence starts with either 0x or 0X, followed by digits, and letters A through F or a through f.

If the base is greater than zero, the subject sequence contains decimal digits and letters, possibly preceded by either a plus or a minus sign. The letters a (or A) through z (or Z) represent values from 10 through 36, but only those letters whose value is less than the value of the base are allowed. The function stops reading the string at the first character that it cannot recognize as part of a number. This character can be the first numeric character greater than or equal to the base. The strtoul() function sets string2 to point to the end of the resulting output string if a conversion is performed and provided that string2 is not a NULL pointer.

When you are using the strtoul() function, string1 should point to a string with the following form:



If base is in the range of 2-36, it becomes the base of the number. If base is 0, the prefix determines the base (8, 16, or 10): the prefix 0 means base 8; the prefix 0x or 0X means base 16; using any other digit without a prefix means decimal.

The pointer to the converted characters, even if conversion was unsuccessful, is stored in the object pointed to by *string2*, if *string2* is not a NULL pointer.

Returned Value

If successful, strtoul() returns the converted unsigned long int value, represented in the string.

If unsuccessful, strtoul() returns 0 if no conversion could be performed. If the correct value is outside the range of representable values, strtoul() returns ULONG_MAX. If the value of base is not supported, strtoul() returns 0.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "atoll() Convert character string to signed long long " on page 66
- "sscanf() Read and Format Data" on page 89
- "strtol() Convert Character String to Long" on page 107

strtoull() — Convert String to Unsigned Long Long

Format

```
#include <stdlib.h>
unsigned long long strtoull(register const char * __restrict__ nptr,
char ** __restrict__ endptr, int base);
```

Compile Requirement: Use of this function requires the long long data type. See <u>z/OS XL C/C++ Language</u> Reference for information about how to make long long available.

General Description

The strtoull() function converts *nptr*, a character string, to an unsigned long long value.

The function decomposes the entire string into three parts:

- 1. A sequence of white space characters as defined by the IBM-1047 codepage.
- 2. A sequence of characters interpreted as an unsigned integer in some base notation. This is the *subject sequence*.
- 3. A sequence of unrecognized characters.

The base notation is determined by *base*, if base is greater than zero. If base is zero, the base notation is determined by the format of the sequence of characters that follow an optional plus or optional minus sign.

10

Sequence starts with nonzero decimal digit.


8Sequence starts with 0, followed by a sequence of digits with values from 0 to 7.

16

Sequence starts with either 0x or 0X, followed by digits, and letters A through F or a through f.

If the base is greater than zero, the subject sequence contains decimal digits and letters, possibly preceded by either a plus or a minus sign. The letters a (or A) through z (or Z) represent values from 10 through 36, but only those letters whose value is less than the value of the base are allowed. The function stops reading the string at the first character that it cannot recognize as part of a number. This character can be the first numeric character greater than or equal to the base. The strtoull() function sets endptr to point to the end of the resulting output string if a conversion is performed and provided that endptr is not a NULL pointer.

When you are using the strtoull() function, *nptr* should point to a string with the following form:



If base is in the range of 2-36, it becomes the base of the number. If base is 0, the prefix determines the base (8, 16 or 10): the prefix 0 means base 8; the prefix 0x or 0X means base 16; using any other digit without a prefix means decimal.

The pointer to the converted characters, even if conversion was unsuccessful, is stored in the object pointed to by *endptr*, if *endptr* is not a NULL pointer.

Returned Value

If successful, strtoull() returns the converted unsigned long long value, represented in the string.

If unsuccessful, strtoull() returns 0 if no conversion could be performed. If the correct value is outside the range of representable values, strtoull() returns ULLONG_MAX (ULONGLONG_MAX). If the value of base is not supported, strtoull() returns 0.

Related Information

- "stdlib.h Define standard library functions" on page 59
- "atoi() Convert character string to integer" on page 65
- "atol() Convert character string to long" on page 65
- "atoll() Convert character string to signed long long "on page 66
- "sscanf() Read and Format Data" on page 89
- "strtoul() Convert String to Unsigned Integer" on page 111

tolower(), toupper() — Convert Character Case

Format

```
#include <ctype.h>
int tolower(int c); /* Convert c to lowercase if appropriate */
int toupper(int c); /* Convert c to uppercase if appropriate */
```

General Description

The tolower() function converts *c* to a lowercase letter, if possible. Conversely, the toupper() function converts *c* to an uppercase letter, if possible.

Returned Value

If successful, tolower() and toupper() return the corresponding character, as defined in the IBM-1047 code page, if such a character exists.

If unsuccessful, tolower() and toupper() return the unchanged value c.

Related Information

- "ctype.h Declare character classification functions" on page 51
- "isalnum() to isxdigit() Test integer value" on page 71

va_arg(), va_copy(), va_end(), va_start() — Access Function Arguments

Format

```
#include <stdarg.h>

var_type va_arg(va_list arg_ptr, var_type);
void va_end(va_list arg_ptr);
void va_start(va_list arg_ptr, variable_name);
```

C99: See the sample code below.

```
#define _ISOC99_SOURCE
#include <stdarg.h>

var_type va_arg(va_list arg_ptr, var_type);
void va_end(va_list arg_ptr);
void va_start(va_list arg_ptr, variable_name);
void va_copy(va_list dest, va_list src);
```

General Description

The va_arg(), va_end(), and va_start() macros access the arguments to a function when it takes a fixed number of required arguments and a variable number of optional arguments. You declare required arguments as ordinary parameters to the function and access the arguments through the parameter names.

The va_start() macro initializes the *arg_ptr* pointer for subsequent calls to va_arg() and va_end().

The argument <code>variable_name</code> is the identifier of the rightmost named parameter in the parameter list (preceding <code>, ...</code>). Use the <code>va_start()</code> macro before the <code>va_arg()</code> macro. Corresponding <code>va_start()</code> and <code>va_end()</code> macro calls must be in the same function. If <code>variable_name</code> is declared as a register, with a function or an array type, or with a type that is not compatible with the type that results after application of the default argument promotions, then the behavior is undefined.

The va_arg() macro retrieves a value of the given var_type from the location given by arg_ptr and increases arg_ptr to point to the next argument in the list. The va_arg() macro can retrieve arguments from the list any number of times within the function.

The macros also provide fixed-point decimal support under z/OS XL C. The sizeof(xx) operator is used to determine the size and type casting that is used to generate the values. Therefore, a call, such as, $x = va_arg(ap, _Decimal(5,2))$; is valid. The size of a fixed-point decimal number, however, cannot be made a variable. Therefore, a call, such as, $z = va_arg(ap, _Decimal(x,y))$ where x = 5 and y = 2 is not valid.

The va_end() macro is needed by some systems to indicate the end of parameter scanning.

va_start() and va_arg() do not work with parameter lists of functions whose linkages were changed with the #pragma linkage directive.

stdarg.h and varargs.h are mutually exclusive. Whichever #include comes first, determines the form of macro that is visible.

The type definition for the va_list type in this implementation is "char *va_list".

The va_copy() function creates a copy (*dest*) of a variable of type va_list (*src*). The copy appear as if it has gone through a va_start() and the exact set of sequences of va_arg() as that of *src*.

After va_copy() initializes dest, the va_copy() macro shall not be invoked to reinitialize *dest* without an intervening invocation of the va_end() macro for the same *dest*.

Returned Value

The va_arg() macro returns the current argument.

The va_end(), va_copy(), and va_start() macros return no values.

Related Information

- "stdarg.h Define macros for accessing variable-length argument lists in functions" on page 57
- "vsnprintf() Format and print data to fixed length buffer" on page 115
- "vsprintf() Format and Print Data to Buffer" on page 116

vsnprintf() — Format and print data to fixed length buffer

Format

General Description

The vsnprintf() function is equivalent to snprintf(), except that instead of being called with a variable number of arguments, it is called with an argument list as defined by stdarg.h. For a specification of the *format* string, see "sprintf() — Format and Write Data" on page 83.

Initialize the argument list by using the va_start macro before each call. These functions do not invoke the va_end macro, but instead invoke the va_arg macro causing the value of arg after the return to be unspecified.

Notes:

- 1. Use of vsnprintf() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.
- 2. In contrast to some UNIX-based implementations of the C language, the z/OS XL C/C++ implementation of the vprintf() family increments the pointer to the variable arguments list. To control whether the pointer is incremented, call the va_end macro after each function call.

Returned Value

The vsnprintf() function returns the number of characters that would have been written had n been sufficiently large, not counting the terminating null character, or a negative value if an encoding error occurred. Thus, the null-terminated output has been completely written if and only if the returned value is nonnegative and less than n.

Related Information

- "stdarg.h Define macros for accessing variable-length argument lists in functions" on page 57
- "stdio.h Define I/O related functions" on page 57
- "va_arg(), va_copy(), va_end(), va_start() Access Function Arguments" on page 114

vsprintf() — Format and Print Data to Buffer

Format

General Description

The vsprintf() function is equivalent to the sprintf() function, except that instead of being called with a variable number of arguments, it is called with an argument list as defined in stdarg.h. For a specification of the *format* string, see "sprintf() — Format and Write Data" on page 83.

Initialize the argument list by using the va_start macro before each call. These functions do not invoke the va_end macro, but instead invoke the va_arg macro causing the value of arg after the return to be unspecified.

Notes:

- 1. Use of vsprintf() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.
- 2. In contrast to some UNIX-based implementations of the C language, the z/OS XL C/C++ implementation of the vprintf() family increments the pointer to the variable arguments list. To control whether the pointer to the argument is incremented, call the va_end macro after each call to vsprintf().

Returned Value

If successful, vsprintf() returns the number of characters written target-string.

If unsuccessful, vsprintf() returns a negative value.

Related Information

- "stdarg.h Define macros for accessing variable-length argument lists in functions" on page 57
- "stdio.h Define I/O related functions" on page 57
- "va_arg(), va_copy(), va_end(), va_start() Access Function Arguments" on page 114

vsscanf() — Format Input of a STDARG Argument List

Format

General Description

The vsscanf() function is equivalent to the sscanf() function, except that instead of being called with a variable number of arguments, it is called with an argument list as defined in stdarg.h.

Initialize the argument list by using the va_start macro before each call. These functions do not invoke the va_end macro, but instead invoke the va_arg macro causing the value of arg after the return to be unspecified.

Notes:

- 1. Use of vsscanf() requires that an environment has been set up by using the __cinit() function. When the function is called, GPR 12 must contain the environment token created by the __cinit() call.
- 2. In contrast to some UNIX-based implementations of the C language, the z/OS XL C/C++ implementation of the vscanf() family increments the pointer to the variable arguments list. To control whether the pointer is incremented, call the va_end macro after each function call.

Returned Value

See "sscanf() — Read and Format Data" on page 89.

- "stdarg.h Define macros for accessing variable-length argument lists in functions" on page 57
- "stdio.h Define I/O related functions" on page 57
- "sscanf() Read and Format Data" on page 89

vsscanf

Appendix A. Function stack requirements

Table 16 on page 119 lists the stack frame requirements for each Metal C runtime function. All sizes are in bytes.

Function	AMODE 31 stack size	AMODE 64 stack size
abs	256	512
atoi	256	512
itol	256	512
atoll	1280	1536
calloc	1024	1536
_cinit	512	512
_cterm	1024	1024
iv	256	512
ree	512	1536
salnum	256	512
salpha	256	512
sblank	256	512
scntrl	256	512
sdigit	256	512
sgraph	256	512
slower	256	512
sprint	256	512
punct	256	512
sspace	256	512
supper	256	512
sxdigit	256	512
abs	256	512
div	256	512
abs	512	512
div	512	512
nalloc	768	1024
_malloc31	768	1024
петссру	512	512
nemchr	512	512
nemcmp	512	512

Function	AMODE 31 stack size	AMODE 64 stack size
memcpy	512	512
memmove	512	512
nemset	256	512
qsort	1280 ¹	1792 ¹
and	256	512
rand_r	256	512
realloc	1024	2048
snprintf	3072	3584
nprintf when using e, E, f, F, g, G onversion specifiers	32000	32768
nprintf when using e, E, f, F, g, conversion specifiers with the L onversion prefix	48896	49920
sprintf	3072	3584
printf when using e, E, f, F, g, G onversion specifiers	32000	32768
sprintf when using e, E, f, F, g, G conversion specifiers with the L conversion prefix	48896	49920
srand	256	512
scanf	2304	2560
scanf when using e, E, f, F, g, G onversion specifiers	4864	5632
scanf when using e, E, f, F, g, G conversion specifiers	5888	6656
scanf when using e, E, f, F, g, G conversion specifiers with the L conversion prefix	23040	23552
strcat	512	512
trchr	512	512
trcmp	512	512
trcpy	512	512
trcspn	768	768
trdup	1024	1536
trlen	512	512
trncat	512	512
trncmp	512	512
trncpy	512	512

Function	AMODE 31 stack size	AMODE 64 stack size
trpbrk	768	768
trrchr	512	512
rspn	768	768
rstr	512	512
rtod	4096	4352
rtof	3072	3328
tok	768	1024
rtok_r	1024	1536
tol	1024	1024
rtold	21248	21248
rtoll	1024	1024
rtoul	1024	1024
rtoull	768	1024
lower	256	512
upper	256	512
nprintf	3072	3584
nprintf when using e, E, f, F, g, conversion specifiers	32000	32768
nprintf when using e, E, f, F, g, conversion specifiers with the L nversion prefix	48896	49920
printf	3072	3584
orintf when using e, E, f, F, g, G nversion specifiers	32000	32768
printf when using e, E, f, F, g, conversion specifiers with the Lonversion prefix	48896	49920
sscanf	2304	2560
scanf when using e, E, f, F, g, G nversion specifiers	4864	5632
scanf when using e, E, f, F, g, conversion specifiers with the l nversion prefix	5888	6656
sscanf when using e, E, f, F, g, conversion specifiers with the L poversion prefix	23040	23552

Note: You must add the stack size of the comparison function you supply to the base value.

Appendix B. CICS programming interface examples

CICS Transaction Server for z/OS offers a number of programming interfaces. The application programming interfsace is widely used by CICS transactions running in a CICS environment. The exit programming interface can be used in a restricted environment that enables the customization of CICS to specific requirements, such as in global user exit programs.

The CICS application programming interface (CICS API) can be used from programs written in any of the high level programming languages supported by CICS, as well as in assembler programs. However, the exit programming interface (XPI) is provided to allow access to some of the CICS services from user exit programs, and these programs must be written in assembler. With the new support in this release, it is now possible for a C language program using the Metal C option to also use the CICS exit programming interface. This opens up the possibility of writing global user exit code using Metal C as a high level language alternative to assembler.

This topic contains some programming examples that demonstrate how the CICS XPI and the CICS API can be used in Metal C.

Runtime environment adapter

A Metal C "main" code in CICS requires the following capabilities.

- prolog code for environment initialization
- epilog code for environment termination
- writable static area (WSA) initialization plug-in
- writable static area (WSA) termination plug-in

In CICS, the prolog and epilog code are mandatory because the Metal C default prolog and epilog obtain storage using the MVS STORAGE macro. In CICS, storage should be obtained using CICS storage management API commands, and the execution environment should be set up by the DFHEIENT macro. The prolog code is mandatory, and the corresponding epilog code should also be provided.

WSA initialization and termination plug-in code should be provided. A C "main" program can be coded which does not use static data, but the CICS API injects static data into the code.

CICS programs should be reentrant, so a CICS "main" program must be compiled with the Metal C RENT option specified to meet this CICS requirement.

A Metal C subroutine requires the following capabilities.

- Optional prolog code for environment initialization
- Optional epilog code for environment termination

Subroutines do not cause writable static areas to be generated. When you write subroutines, natural reentrancy must be maintained. The CICS exit programming example provides an illustration of on how this is done.

Under CICS, the default Metal subroutine prolog and epilog code can be used if the space allocated for the execution stack does not run out.

CICS application programming interface example

The CICS application programming interface example consists of the following components.

MTLBOOT	Assembler bootstrap program
MTLHALO	Metal C "Hello World" using the CICS API
MTLENT	"main" prolog macro

MTLXIT	"main" epilog macro
MTLSENT	Subroutine prolog macro
MTLSXIT	Subroutine epilog macro

Data structures

The MTLBOOT assembler program defines the following data structures.

- PLISTINIT, which defines the WSA initialization parameters
- PLISTTRM, which defines the WSA termination parameters
- main_plist, which defines the "main" program entry parameters
- the application execution stack with the stack header defined by stack hdr

<u>Figure 52 on page 124</u> illustrates how the API components and entry points used in the examples are related.

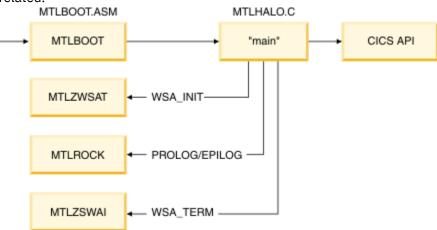


Figure 52. CICS API example flow

Example description

MTLBOOT

The MTLBOOT serves as the adapter program that sets up the proper CICS execution environment for assembler code. It provides the following services.

- sets up the CICS execution environment for assembler
- obtains the program stack storage for the Metal C program execution
- a callback service to obtain additional stack storage
- a callback service to free additional stack storage
- return to CICS after program execution
- · the WSA initialization plug-in
- the WSA termination plug-in

The stack storage provided to the Metal C code has a header described by the stack_hdr dsect. The fields that are not standard are bootstg and mtlrock_ep. The bootstg field is a fullword containing a pointer to the CICS allocated dynamic save area associated with the bootstrap program. This is analogous to the "this" pointer in C++. The mtlrock_ep field is the entry point to the callback routine. An input parameter provided to the callback routine determines whether getmain or freemain is used to allocate storage.

MTLHALO

MTLHALO represents the application code. This is a simple example which demonstrates how the CICS API is used under Metal C. It also demonstrates the use of the prolog and epilog examples. This is the code that you would replace with your own application requirements.

MTLENT

MTLENT is mandatory for the "main" program. In this example set, the complexity is encapsulated within the bootstrap program so that the main prolog macro can be simple and reusable. This macro assumes that it is invoked with an entry environment described by the "main_plist".

MTLXIT

MTLXIT is the "main" program exit macro.

MTLSENT

MTLSENT is an optional macro for subroutine entry. It provides an example of what can be done if additional stack storage needs to be obtained. This macro provides an example of how to invoke the callback routines in the bootstrap program.

MTLSXIT

MTLSXIT is an optional subroutine exit macro. If MTLSENT is used for entry, MTLSXIT should be used for exit

Example code

Figure 53 on page 126 contains the bootstrap for using Metal C with CICS API programs.

```
XOPTS(NOPROLOG NOEPILOG SP)
*ASM
***********************
* Module Name = MTLBOOT
* Descriptive Name = CICS Bootstrap for metal C code example
  @BANNER START
                       MTI BOOT
* Licensed Materials - Property of IBM
  "Restricted Materials of IBM"
* 5655-S97
* (C) Copyright IBM Corp. 1989, 2009
* Description
    The bootstrap routine sets up stack storage and flows
    control to the metal c program. It provides callbacks for
    the WSA init/term plugin functionality. It also provides
   the getmain/freemain entry points which are invoked by the
    subroutine prolog/epilog routines.
   This code also provides an implementation proof-of-concept
   if the user wants to create a CICS API layer in assembler * and the business layer in metal c. This code can be extended*
    with the code to implement the CICS API.
************************
* The Metal C Bootstrap program.
**********************
*********************
* Input parm list
**********************
PLISTTRM
             DSECT
                       WSA termination plugin parameters
             DS F
trm_addr
trm_size
             DS
trm_user_ptr DS
PLISTINIT
             DSECT
                        WSA initialization plugin parameters
init_addr
             DS F
init_size
             DS
init_user_ptr DS
                 F
             DS
init_align
**********************
* define the stack block control area
**********************
stack hdr
          dsect
                      metal boot reg 12 contents
bootstg ds f metal boot reg 12 contents
mtlrock_ep ds a callback for getmain/fi
blk_beg_addr ds a begin address of block
blk_end_addr ds a end address of block
lstack_hdr equ *-stack_hdr
                         callback for getmain/freemain
metlget
             equ x'0001'
metlfre
             equ x'0002'
             copy dfhkebrc
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 1 of 7)

Figure 53. CICS Bootstrap for metal C code example: MTLBOOT

```
**********************
* Program state
*********************
        DFHEISTG
  local working storage
booteye ds
               c18
bootrsa DS
               18F
mtlrsa
        ds
               7F
AREA
NAB
        DS
RETCD
        DS
main_plist ds 0a
hdr_ptr
           ds a
stack_ptr
           ds a
org_r1
           ds a
                         array of pointers to dsablocks array index
dsapool ds
               10f
next_free ds H
        DFHEIEND
        DFHREGS ,
MTLBOOT CSECT
MTLB00T
        DFHEIENT CODEREG=(R3), DATAREG=(R12), EIBREG=(R11)
MTLBOOT
        AMODE 31
MTLBOOT RMODE 31
* logic
* getmain 'main' working storage
* format R1 content
* dispatch
        LARL R10, CONSTANTS
        USING CONSTANTS, R10
              booteye,=cl8'>MTLROCK' set eyecatcher in anchor
              R13, bootrsa point R13 to local save
        LA
        st r1,org_r1 save user EXEC CICS ADDRESS EIB(DFHEIBR)
                             save user plist register
        EXEC CICS GETMAIN SET(R4) FLENGTH(DSA_SIZE) RESP(RETCD)
        clc retcd,dfhresp(normal) check getmain error
        jne main_abend
using stack_hdr,r4
        st
               r12,bootstg
                              work area for metal rock callback
        mvc
               mtlrock_ep,callback_ep
               r4,blk_beg_addr
        st
               r5,r4
        lr
                            compute end address
               r5,dsa_size
        а
               r5,blk_end_addr
        st
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 2 of 7)

```
r5, r5
                               store block address in pool ctrl
                r6,dsapool
r4,0(r5,r6)
r5,1(,r5)
         la
         st
                               increment index
         la
         sth
                r5,next_free
         drop
         la
                r5,lstack_hdr(,r4) point to user area
                r4,hdr_ptr
         st
         st
                r5,stack_ptr
         la
                r1, main_plist set plist register
* flow control to the metal c program
                R15,VMAIN
R14,R15
         BASR
* freemain whatever we've getmained
                main_return
main_abend ds 0h
    EXEC CICS ABEND ABCODE('CMTL')
main_return_ds 0h
         DFHEIRET
         drop
********************
* The MTLROCK callback service
* The input environment is as follows;
  R2 - the function code
  R1 - the boot token, the mtlboot eistg pointer. This is important for getmain especially, because at the time
        getmain for stack storage is invoked, there's no more
        storage space to use.
        C++ developers can think of this as the 'this' pointer
  On return from a getmain
  R2 - block pointer
R1 - the user section
* The getmained block pointer is stored in an array of 10
* elements. No check is make for overflow.
*****************
         ENTRY MTLROCK
MTLROCK DS
             OH r10,r0,mtlrsa-DFHEISTG(r1) save used regs
         stm
                                      set token in r12
         lr
               r12,r1
LETSROCK DS
               ΘН
         larl r10, constants
         EXEC CICS ADDRESS EIB(DFHEIBR)
         chi
               r2,metlget
                                      do we getmain
         jе
               getmain
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 3 of 7)

```
**********************
* else it's a freemain. Since we are maintaining a stack,
* the last getmained block is the first to be freed
*******************
* freemain logic
       1h
            r5,next_free obtain block address to free
        bctr r5,0
                         some validation needed here
       sll
            r5,2
       la
             r6,dsapool
        1
             r4,0(r5,r6)
        EXEC CICS FREEMAIN DATAPOINTER(R4) RESP(RETCD)
       clc
            retcd,dfhresp(normal)
        ine
            freemain_abend *
        xr
             r4,r4
                         clear the array location
        st
             r4,0(r5,r6)
       srl
            r5,2
                         decrement the array index
       sth
            r5,next_free *
             retrock
freemain_abend ds Oh
       EXEC CICS ABEND ABCODE('FMTL')
             retrock
********************
* getmain goes in here
*************************
getmain ds
           0h
       EXEC CICS GETMAIN SET(R4) FLENGTH(DSA_SIZE) RESP(RETCD)
       clc
              retcd,dfhresp(normal) check getmain error
              getmain_abend
       jne
       using stack_hdr,r4
             r12, bootstg
                           work area for metal rock callback
       st
              mtlrock_ep,callback_ep
       mvc
        st
              r4,blk_beg_addr
             r5,r4
       lr
                          compute end address
              r5,dsa_size
       а
              r5,blk_end_addr
       st
       1h
              r5,next_free store block address in pool ctrl
       sll
              r5,2
              r6,dsapool
       la
              r4,0(r5,r6)
       st
        srl
              r5,2
                          increment array index
       la
              r5,1(,r5)
       sth
              r5,next_free *
       drop
              r4
       lr
                          r2 has blk hdr ptr
                          r1 contains the user section
        lr
              r1,r4
              r1,lstack_hdr(,r1)
       la
              retrock
        j
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 4 of 7)

```
getmain_abend ds 0h
         EXEC CICS ABEND ABCODE('EMTL')
retrock ds
         LM
               r10,r0,mtlrsa
         BR
********************
* METALC WSA Initialization plugin
* The R13, dfheistg being used here is not the same as that

* being used in the main entry and in mtlrock. This EISTG is

* taken out of the initial DSA allocated for the metal c main
* entry point
**********************
         ENTRY MTLZWSAT
MTLZWSAT DS
               0F
         STM
               14,11,12(13)
               15,13
         LR
               13,8(,13)
         ST
               15,4(,13)
* init common registers
         lr
                                   eistg for this callback
               12,13
               R9,R1
         LR
                                    set plist register
         LARL R10, CONSTANTS
         USING PLISTTRM, R9
* logic
         EXEC CICS ADDRESS EIB(DFHEIBR)
         ICM R4,B'1111',trm_addr
               trm retn
         EXEC CICS FREEMAIN DATAPOINTER(R4)
trm_retn ds
               0h
               13,4(,13)
14,12(,13)
1,11,24(13)
         LM
         BR
               14
         DS
               0F
         DROP
               R9
********************
* METALC WSA Initialization plugin
* The R13, dfheistg being used here is not the same as that
* being used in the main entry and in mtlrock. This EISTG is
* taken out of the initial DSA allocated for the metal c main
* entry point
*********************
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 5 of 7)

```
ENTRY MTLZWSAI
MTLZWSAI DS
         STM
               14,11,12(13)
               15,13
         LR
               13,8(,13)
         ST
               15,4(,13)
* init common registers
                                    eistg for this callback
         lr
               12,13
         LARL R10, CONSTANTS
                             set plist register
              R9,R1
         USING PLISTINIT, R9
                              init output data
         XC
               AREA, AREA
*
 logic
         EXEC CICS ADDRESS EIB(DFHEIBR)
ICM R5,B'1111',INIT_SIZE
JZ RETURN nothing to do
icm r6,b'1111',init_addr is there
                                                 something to copy
                              nothing to copy
               return
         jz
*
         EXEC CICS GETMAIN SET(R4) FLENGTH(INIT_SIZE) RESP(RETCD)
         clc retcd,dfhresp(normal) check getmain error je wsacopy proceed to copy
****************
\star controlled abend the transaction if getmain fails to allow*
* IPCS analysis
*****************
         DC H'0'
EXEC CICS ABEND ABCODE('DMTL')
*
               return
         ds
wsacopy
               R4,AREA
r7,r5
         ST
                               propagate length
         1r
         mvcl r4,r6
                              and copy the WSA area
RETURN
         DS
               15, AREA
13,4(,13)
         L
         L
         L
               14,12(,13)
         LM
               1,11,24(13)
         BR
               14
         DS
               0F
CONSTANTS
             DS
                   ΘD
VMAIN
             DC
                    V(MAIN)
callback_ep dc
                    a(mtlrock)
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 6 of 7)

```
*******************
* define the allocation size of a stack block here
***************
dsa_size dc a(32000)
*dsa_size dc a(4096)
        LTORG
***************
* prolog/epilog for a CICS API layer (proposed)
**************
        ENTRY MTL2CICS
MTL2CICS DS
        DS 0F
STM RE,RC,12(RD) save registers
lr rc,rd pick up the 'this' pointer
tc.-4 *
              0F
        1 rc,0(,rc) point to stack block header
1 rc,0(,rc) and pick up bootstg ptr
st rd,bootrsa+4 store prev save pointer
la rd,bootrsa point to routine RSA
  mtl2cics logic
mtl2cics_rtn ds Oh
              ds 0h
rd,4(,rd) recover previous save pointer
re,rc,12(rd) restore regs
re and return to caller
            rd,4(,rd)
        lm
         br
        ltorg
END MTLBOOT
                                 contants/literal pool
```

CICS Bootstrap for metal C code example: MTLBOOT (Part 7 of 7)

<u>Figure 54 on page 133</u> contains example code that demonstrates the use of the prolog and epilog examples.

```
#include <stodio>
#include <string.h>
#include <stdlib.h>
/* char w_text[81];
/* the generated code seems to locate globals in the
/st code section. Global variables make the program non-reentrant st/
DFHEIBLK *eiptr;
/* The prolog and epilog will cause a getmain and freemain for
/* additional stack space to be driven if the stack block size /* setting in MTLBOOT is 4096 bytes.
#pragma prolog(bigrtn, "MTLSENT")
#pragma epilog(bigrtn, "MTLSXIT")
void bigrtn()
  char bigbuff[3800];
/*char bigbuff[16]; */
bigbuff[0] = '1';
#pragma prolog(sendmsg,"MTLSENT")
/*_#pragma epilog(sendmsg,"MTLSXIT") */
void sendmsg(char *s)
   int out len = 81;
  char w_text[81];
  bigrtn();
memset(w_text,' ',out_len);
strncpy(w_text,s,out_len);
EXEC CICS SEND FROM(w_text) LENGTH(out_len) WAIT;
#pragma prolog(main,"MTLENT")
#pragma epilog(main, "MTLXIT")
main()
  char msg[]= "METALC Hello";
int msg_len = 12;
   /*int out_len = 81; */
   /*char w_text[81]; */
   /*char s[23] = "Hello CICS from METAL!\n";*/
  EXEC CICS ADDRESS EIB(dfheiptr);
EXEC CICS WRITEQ TS QUEUE("NOEL00000") FROM(msg) LENGTH(msg_len);
sendmsg("Hello CICS from METAL!\n");
```

Figure 54. CICS API used under Metal C example code: MTLHALO

Figure 55 on page 134 contains the main prolog for using Metal C with CICS API programs.

```
**********************
* MODULE NAME = MTLENT
* DESCRIPTIVE NAME = METAL C FOR CICS MAIN PROLOG
* @BANNER_START
                           MTLENT
* LICENSED MATERIALS - PROPERTY OF IBM
  "RESTRICTED MATERIALS OF IBM"
* 5655-S97
* (C) COPYRIGHT IBM CORP. 1989, 2009
**********************
          MACRO
&NAME
         MTLENT
         GBLC &CCN_PRCN
         GBLC &CCN_LITN
GBLC &CCN_BEGIN
         GBLC &CCN_ARCHLVL GBLA &CCN_DSASZ
          GBLA &CCN RLOW
         GBLA &CCN_RHIGH
GBLB &CCN_NAM
GBLB &CCN_LP64
GBLC &CCN_WSA_INIT
GBLC &CCN_WSA_TERM
&CCN_WSA_INIT SETC 'MTLZWSAI'
&CCN_WSA_TERM SETC 'MTLZWSAT'
*************************
* THE BOOTSTRAP ROUTINE WILL PROVIDE US WITH THE INITIAL EXECUTION
* ENVIROMENT. THE INPUT DATA, POINTED BY R1 IS DEFINED IN MTLBOOT.
* PREPARE THE EXECUTION ENVIRONMENT.
                        **************
          STM 14,12,12(13)
**************************
* CHAIN THE CURRENT STACK TO THE PREVIOUS
*************************
             14,13 SAVE PREVIOUS SAVEAREA PTR
13,0(,1) PICK UP THE BLOCK HEADER POINTER
12,4(,1) PICK UP THE USER AREA POINTER
13,0(,12) SAVE AS CURRENT STACK PREFIX
13,4(,12) POINT R13 TO METALC USER STACK AREA
         LR
         L
         ST
                13,8(,14) CHAIN DSA TO CALLER'S DSA
14,4(,13) POINT TO PREVIOUS STACK AREA
1,8(,1) RESTORE PLIST POINTER
         ST
         ST
          MEND
```

Figure 55. Metal C for CICS main prolog: MTLENT

Figure 56 on page 135 contains the main epilog for using Metal C with CICS API programs.

```
**********************
* MODULE NAME = MTLXIT
* DESCRIPTIVE NAME = METAL C FOR CICS MAIN EPILOG
* @BANNER_START
                      MTLXIT
* LICENSED MATERIALS - PROPERTY OF IBM
* "RESTRICTED MATERIALS OF IBM"
* 5655-S97
* (C) COPYRIGHT IBM CORP. 1989, 2009
*****************
        MACRO
&NAME
        MTLXIT
       GBLC &CCN_PRCN
GBLC &CCN_LITN
GBLC &CCN_BEGIN
GBLC &CCN_ARCHLVL
GBLA &CCN_DSASZ
        GBLA &CCN RLOW
       GBLA &CCN_RHIGH
GBLB &CCN_NAM
        GBLB &CCN_LP64
********************
\star RETURN TO THE BOOTSTRAP PROGRAM, MTLBOOT, WHICH WILL CLEAN UP THE \star
* EXECUTION ENVIRONMENT.
************************
       L 13,4(,13) POINT TO CALLER'S SAVE
LM 14,12,12(13) RESTORE CALLER'S REGS
BR 14 AND RETURN
        MEND
```

Figure 56. Metal C for CICS main epilog: MTLXIT

Figure 57 on page 136 contains the subroutine prolog for using Metal C with CICS API programs.

```
**********************
* MODULE NAME = MTLSENT
* DESCRIPTIVE NAME = METAL C FOR CICS SUBROUTINE PROLOG
 @BANNER_START
                       MTLSENT
* LICENSED MATERIALS - PROPERTY OF IBM
 "RESTRICTED MATERIALS OF IBM"
* 5655-S97
* (C) COPYRIGHT IBM CORP. 1989, 2009
***********************
         MACRO
&NAME
        MTLSENT
        GBLC &CCN_PRCN
GBLC &CCN_LITN
GBLC &CCN_BEGIN
        GBLC &CCN_ARCHLVL GBLA &CCN_DSASZ
        GBLA &CCN_RLOW
        GBLA &CCN_RHIGH
        GBLB &CCN NAM
        GBLB &CCN_LP64
*********************
* WARNING RO HOLDS THE WSA TOKEN. DO NOT USE IT
********************
        STM 14,12,12(13)
        ΙR
             15,13
                             POINT TO STACK PREFIX
        AHI
             15,-4
             15,-4 POINT TO STACK PREFIX
14,0(,15) PICK UP BLOCK HDR PTR
*******************
* CHECK IF CURRENT BLOCK STILL HAS SPACE
\star THE MAXIMUM STACK ANY ROUTINE CAN HAVE SHOULD BE DSA_SIZE
* MINUS 20, THE SYSTEM USAGE
********************
             2,8(,13) PICK UP THE NAB
        L
                             COUNT THE PREFIX SIZE
        AHI
             2,4
                             CCN_DSASZ SHOULD FIT IN A
        AHI 2,&CCN_DSASZ
                             HALFWORD
             2,12(,14) WILL IT FIT IN CURRNT BLK?
GET_SPACE_&SYSNDX SORRY, NO.
2,8(,13) PICK UP NAB AGAIN
14,0(,2) SET WEARER SOLUTION
        С
        JH
        ST
             14,0(,2)
                             SET HEADER POINTER AS NEW
                             STACK PREFIX
                             POINT TO USER STACK AREA CHAIN TO PREVIOUS STACK
        LA
             2,4(,2)
             2,4(,2)
13,4(,2)
        ST
        LR
             13,2
                             SET R13 TO CURRENT
              DONE_&SYSNDX
GET_SPACE_&SYSNDX DS 0H
```

Metal C for CICS subroutine prolog: MTLSENT (Part 1 of 2)

Figure 57. Metal C for CICS subroutine prolog: MTLSENT

Metal C for CICS subroutine prolog: MTLSENT (Part 2 of 2)

Figure 58 on page 138 contains the subroutine epilog for using Metal C with CICS API programs.

```
***********************
* MODILE NAME = MTLSXTT
* DESCRIPTIVE NAME = METAL C FOR CICS SUBROUTINE EPILOG
 @BANNER_START
                        MTLSXIT
* LICENSED MATERIALS - PROPERTY OF IBM
 "RESTRICTED MATERIALS OF IBM"
* 5655-S97
* (C) COPYRIGHT IBM CORP. 1989, 2009
**********************
         MACRO
&NAME
        MTLSXIT
        GBLC &CCN_PRCN
GBLC &CCN_LITN
GBLC &CCN_BEGIN
        GBLC &CCN_ARCHLVL
GBLA &CCN_DSASZ
        GBLA &CCN RLOW
        GBLA &CCN_RHIGH
GBLB &CCN_NAM
        GBLB &CCN_LP64
              15,-4
2,15
                             POINT TO PREFIX
COMPUTE THEORETICAL BLOCK CTL
        AHT
        I R
        AHI
              2,-16
                              AREA POINTER
              2,0(,15)
                               ARE WE AT THE TOP OF BLOCK ?
              NOFREE &SYSNDX
*********************
\star WE HAVE REACHED THE TOP OF THE BLOCK WHICH WE ARE GOING TO \star
* HAND BACK AS WE ARE DONE WITH IT.
* THE CONTENTS OF R12 WILL BE DESTROYED IN THE PROCESS
**********************
              14,2 COPY BLOCK HDR POII
2,2 REQUEST FREEMAIN
1,0(,14) SET THE BOOT TOKEN
15,4(,14) SET EP ADDRESS
14,15 TNYOKE SERVICE
                               COPY BLOCK HDR POINTER
        I R
        LHI
        BASR 14,15
                              INVOKE SERVICE
NOFREE_&SYSNDX DS 0H
              13,4(,13)
                                POINT TO CALLER'S SAVE
        LM
              14,12,12(13)
        BR
        MEND
```

Figure 58. Metal C for CICS subroutine epilog: MTLSXIT

CICS exit programming interface example

The CICS exit programming interface is described in the CICS Customization Guide. It is used for programs which run at global user exit points. The example in this section is for the XTSEREQ exit point. The example exit is driven when a temporary storage queue request is to be serviced by CICS. The example exit code however does not perform any business logic. All that is shown is a storage management getmain and freemain request using the exit programming interface.

The CICS exit programming interface example consists of the following components:

MTLBTXPI

Assembler Language bootstrap program.

MTL2XPI

Example using the CICS exit programming interface for Metal C.

<u>Figure 59 on page 139</u> illustrates how the XPI components and entry points used in the examples are related.




Figure 59. CICS XPI example flow

The prolog and epilog macros provided for the CICS API examples are also being used by MTL2XPI.

The MTLBTXPI program is similar to MTLBOOT. It performs the same function and sets up a similar execution environment for MTL2XPI. MTLBTXPI, unlike MTLBOOT, does not provide WSA initialization and termination. MTL2XPI is coded as a C subroutine but not a main program. This avoids the need of setting up a writable static area.

The CICS exit programming interface does not internally generate statically writable variables because it is an assembler only interface.

The data passed from MTLBTXPI to MTL2XPI is described by "main_plist" and the getmain allocated storage for use as the Metal C execution stack. In XPI execution, R1 points to the user exit parameter area. Sample code on how to properly pass this information for Metal C execution is shown. Like MTLBTXPI, the main_plist fields, hdr_ptr, and stack_ptr all point to areas in the Metal C stack storage.

MTL2XPI is the C code that shows an example of how to invoke a CICS XPI service in C. The services invoked are getmain and freemain, but this provides a demonstration that the CICS XPI which is assembler-only can be used by C code.

It should be pointed out that register 13 needs to be set to the contents of "uepstack" upon entry into the XPI. The contents must be copied into another register and not in the C execution stack storage, because register 13 is also used by Metal C as the execution stack pointer.

MTL2XPI uses MTLENT and MTLXIT as its prolog and epilog macros. This demonstrates reuse of these macros because the bootstrap programs, while different, provide the same interface data. MTLSENT and MTLSXIT can also be used in XPI using Metal C code if stack expansion is required.

Example code

Figure 60 on page 140 contains example code for the Metal C CICS bootstrap.

```
*ASM
         XOPTS(NOPROLOG NOEPILOG SP)
***********************
* Module Name = MTLBTXPI
* Descriptive Name = CICS Bootstrap for metal C code example
  @BANNER START
                           MTLBTXPI
* Licensed Materials - Property of IBM
  "Restricted Materials of IBM"
* 5655-S97
* (C) Copyright IBM Corp. 1989, 2009
* Description
    The bootstrap routine sets up stack storage and flows
    control to the metal c program. The metalc program will implement the business logic as a C subrooutine ie not
    'main'. This means a WSA Init/Term callbacks don't need to
    be provided.
    Like the metalc CICS application bootstrap, storage management callbacks for the various subroutine prolog/epilog code is still provided.
    This bootstrap code is used for coding CICS Exit Programming*
    Interface using programs. The XPI is used for assembler-only*
    user exit programs.
    The z/OS C/C++ metalc option allows C programmers to use * the C language to write CICS XPI code in user exit programs.*
***********************
\star The Metal C Bootstrap program for the CICS XPI
**********************
*********************
* Define the stack block control area
*******************
stack_hdr dsect
bootstg ds f bootstrap storage pointer
mtlrock_ep ds a callback for getmain/freemain
blk_beg_addr ds a begin address of block
blk_end_addr ds a end address of block
lstack_hdr
              equ *-stack_hdr
metlget
               equ x'0001'
               equ x'0002'
metlfre
               copy dfhkebrc
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 1 of 7)

Figure 60. CICS bootstrap for Metal C example program: MTLBTXPI

```
**********************
* Program state
*****
* local working storage, pointed to by bootstg
workstg
              dsect
bootrsa DS
booteye ds
                18F
                c18
mtlrsa
         ds
                7F
saverd
        DS
                         metalc main entry argument
main_plist ds 0a
hdr_ptr ds a
stack_ptr ds a
                           ptr to dsa stack header
                         ptr to dsa stack user area
org_r1_ptr ds a
                           r1 contents on entry
                        r1 contents on entry array of nointer
org_r1 ds a
dsapool ds 10f
next_free ds H
                           array of pointers to dsablocks
                           array index
lworkstg equ *-workstg
******************
\star The XTSEREQ exit is driven before CICS processes a temporary \star storage API request. To use this example for other global user*
* exit points, include the relevant definition of the user exit *
* parameter list.
DFHUEXIT TYPE=EP,ID=XTSEREQ GLUE parameter list definition DFHUEXIT TYPE=XPIENV Setup XPI environment
         COPY DFHSMMCY
                                    Setup XPI plist for SM
MTLBTXPI CSECT
MTLBTXPI AMODE 31
MTLBTXPI RMODE 31
* logic
* getmain 'main' working storage
* format R1 content
* dispatch
stm R14,R12,12(R13) $
* Get access to GLUE parameter list
lr R9,R1
                                    Save caller's registers
                                    Save r1 contents
         larl R10, CONSTANTS
         using CONSTANTS, R10
   get bootstrap work area storage
               r2,work_size
                                    set dfhuepar ptr register
         lr
               r3,r1
         brasl r11,getstor
         lr
              r4,r1
         using workstg,r4 set addr'ability mvc booteye,=c18'>MTLBXPI' set eyecatcher in anchor
                           save user plist register
               r9,org_r1
         st
         la
               r9,org_r1
                               normalize to C parm convention
               r9,org_r1_ptr *
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 2 of 7)

```
get initial dynamic storage area
         1
                 r2,dsa_size
         1
                 r3,org_r1
                                    set dfhuepar ptr register
          brasl r11, getstor
         lr
                 r5, r1
         using stack_hdr,r5
                 r4,bootstg
                                work area for metal rock callback
         st
                 mtlrock_ep,callback_ep
         mvc
         st
                 r5,blk_beg_addr
                               compute end address
         lr
                 r6,r5
                 r6,dsa_size
         а
                 r6,blk_end_addr
         st
          хr
                 r6,r6
                                 store block address in pool ctrl
         la
                 r7,dsapool
                 r5,0(r6,r7)
         st
                                 increment index
         la
                 r6,1(,r6)
          sth
                 r6,next_free *
         drop
         la
                 r6,lstack_hdr(,r5) point to user area
         st
                 r5,hdr_ptr
                 r6,stack_ptr
         st
          la
                 r1, main_plist set plist register
\star flow control to the metal c program
                                 point R13 to bootstrap save
                 R13,bootrsa
                 R15,metal_ep
R14,R15
          basr
* free the allocated metalc stack storage
                r6,next_free obtain block address to free r6,0 some validation needed here
         1h
         bctr r6,0
          sll r6,2
          la
                r7,dsapool
                r2,0(r6,r7) set free storage parameter
                                      pick up dfhuepar ptr
                r3,org_r1
          brasl r11, freestor
main_return ds 0h
                                load dfhuepar ptr
         1
                r3,org_r1
         lr r2,r4 address to free brasl r11,freestor and free up our work area
              r13,UEPEPSA-DFHUEPAR(,r3) point to caller's save
r14,r12,12(r13) restore caller's register
         lm
         br
                                      return to caller
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 3 of 7)

```
**********************
* The MTLROCK callback service
* The input environment is as follows; * R2 - the function code
  R1 - the boot token, the mtlbtxpi workstorage ptr. This is
       important for getmain especially, because at the time
       getmain for stack storage is invoked, there's no more
       storage space to use.
       C++ developers can think of this as the 'this' pointer
 On return from a getmain
  R2 - block pointer
R1 - the user section
* The getmained block pointer is stored in an array of 10
* elements. No check is make for overflow.
***********************
        ENTRY MTLROCK
MTLROCK DS
             ΘН
             r10,r0,mtlrsa-workstg(r1) save used regs
        stm
             r4,r1
LETSROCK DS
             0H
        larl r10, constants
        chi r2, metlget
                                  do we getmain
        jе
             getmain
*********************
* else it's a freemain. Since we are maintaining a stack,
* the last getmained block is the first to be freed
* freemain logic
             r5,next_free obtain block address to free
        1h
        bctr r5,0
                           some validation needed here
        sll r5,2
             r6,dsapool * r2,0(r5,r6) set free storage parameter
        la
        1
             r3,org_r1
                                pick up dfhuepar ptr
        brasl r11, freestor
             r3,r3
                           clear the array location
        xr
             r3,0(r5,r6)
        st
        srl
             r5,2
                           decrement the array index
        sth
             r5,next_free *
             retrock
        j
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 4 of 7)

```
**********************
* getmain goes in here
************************
getmain ds
             0h
r2,dsa_size
r3,org_r1
                              set size to get
                              set dfhuepar ptr register
        brasl r11, getstor
             r5,r1
        lr
        using stack_hdr,r5
        st
             r4,bootstg
                          work area for metal rock callback
        mvc
             mtlrock_ep,callback_ep
             r5,blk_beg_addr
        st
             r6,r5
r6,dsa_size
        lr
                          compute end address
        a
             r6,blk_end_addr
        1h
              r6,next_free store block address in pool ctrl
        sll
              r6,2
r7,dsapool
        la
        st
              r5,0(r6,r7)
        srl
              r6,2
                          increment array index
              r6,1(,r6)
        la
        sth
              r6,next_free *
        drop
             r5
        lr
                          r2 has blk hdr ptr
              r2,r5
             r1, r5
                          r1 contains the user section
        lr
            r1,lstack_hdr(,r1)
        la
             retrock
retrock
        ds
             0h
             r10,r0,mtlrsa
        1m
        hr
            r14
CONSTANTS ds
metal_ep dc
              OD
V(mtl2xpi)
a(mtlrock)
callback_ep dc
****************
* define the allocation size of a stack block here. Change *
* these as needed.
**************
dsa_size dc a(32000)
work_size dc a(1works
*dsa_size dc a(4096)
                a(lworkstg)
*dsa_size
       LTORG
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 5 of 7)

```
**********************
* Get dynamic storage area.
\star The CICS storage management XPI function, DHFSMMCX, is used \star
* to get the storage.
* R2 contains the storage length
* R1 contains the storage address on exit or zero if an error *
* occurred.
* Work regs;
* R3,R6,R7
**********************
getstor ds
             0h
        using dfhuepar,r3
l R6,UEPXSTOR
                                 set by caller
                                 set base to XPI plist
                                  .. tell ASM
        using DFHSMMC_ARG,R6
              r13,saverd
R13,UEPSTACK
                                  save R13
                                  Set R13 to the Kernel stack
         DFHSMMCX CALL,
              CLEAR,
              IN.
                                                                     @
              FUNCTION(GETMAIN),
              GET_LENGTH((R2)),
              SUSPEND (YES)
                                                                     @
              STORAGE_CLASS(USER),
                                                                     (0
              OUT.
                                                                     @
               ADDRESS((R7)),
              RESPONSE(*),
              REASON(*)
         CLI
              SMMC_RESPONSE,SMMC_OK Response OK?
        BE
              GETOK
         xr
              r7, r7
                                  clear output register
              'MTLBTXPI - GETMAIN failure '
         WTO
              R15,UERCBYP
         LA
                                  Get return code
         L
              R1,UEPEPSA
                                  Get address of caller's RSA
         ST
                                  Store RC in caller's R15
              R15,16(R1)
GETOK
         DS
              ΘН
                                  R2 is base register for program data
         L
              R13, saverd
                                  restore r13 contents
         lr
              r1,r7
                                  set output reg
                                  and return to caller
         br
              r11
         drop r3,r6
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 6 of 7)

```
*********************
* Free allocated storage
* R2 contains the address of the storage to be freed
* Work Regs;
* R3,R6
*******************
freestor DS
           0H
        using dfhuepar,r3
                              r3 set by caller
                              set base to XPI plist
             R6, UEPXSTOR
        USING DFHSMMC_ARG,R6
                              .. tell ASM
       st
             r13,saverd
             R13, UEPSTACK
                              Set R13 to the Kernel stack
        DFHSMMCX CALL,
                                                               @
             CLEAR,
                                                               ã
             IN.
             FUNCTION(FREEMAIN),
                                                               (0
             ADDRESS((R2))
             STORAGE_CLASS(USER),
             OUT,
             RESPONSE(*).
             REASON(*)
 return code checking is left as an exercise for the reader
       1
             r13, saverd
       br
             r11
        drop r3,r6
        LTORG
        END
            MTLBTXPI
```

CICS bootstrap for Metal C example program: MTLBTXPI (Part 7 of 7)

Figure 61 on page 146 contains example code to use the CICS exit programming API in C.

```
/★ Program Name : MTL2XPI
/* Description : Sample code to use the CICS Exit Programming API*/
                     in C
/* in C
/* Author : Noel C. Sales
                                                                                  */
/* Date
                  : 21 Jan 2010
                                                                                  */
*uepexn; /* Address of exit number

void *uepgaa; /* Address of global work area

void *uepgal; /* Address of work area length

void *ueptca; /* Address of current return code

void *ueptca; /* reserved

void *uepesa; /* Address of exit prof

void *uephmsa; /* Address of exit prof

void *uepgind; /*
/* a C mapping for the dfhuepar dsect
typedef struct {
                         /* Address of task data key and data
/* location flags
  void *uepstack; /* Address of kernel stack entry
void *uepxstor; /* Address of storage for XPI
                          /* parameter list
  /* standard parameters above completed by User Exit Handler*/
void *ueptrace; /* Address of Trace flag */
void *uepparms; /* Start of variable parameters */
void *ueppcds; /* Address of program control exits */
/* DSECT */
                          /* Address of TACB
  void *ueptacb;
} dfhuepar_t;
  *************************
   Notes:
      Metal C uses register 13 to point to the DSA by default. However,
      we are entered with register 13 pointing to the LIFO stack. To
      resolve this the bootstrap program should tuck register 13 in a safe place in the DSA it allocates.
      Before invoking the XPI API, we save the current register 13 in a
      variable, replace it with the register 13 tucked away in the
      'safe place' then restore R13 when we're through.
      To ensure that we still have addressability to the variable, We have the option to use WSA or a register.
      We cannot use the local stack storage because
      register 13 points to the local stack and we just overlayed the
      register.
 ***********************
```

CICS exit programming API example program: MTL2XPI (Part 1 of 3)

Figure 61. CICS exit programming API example program: MTL2XPI

```
typedef struct
   void
               *stack_hdr_p;
   void
               *stack_user_area_p;
   dfhuepar_t *ueparm_p;
} mtl_parm_t;
static void get_storage(dfhuepar_t *plist,void **storage)
  void
               *pstg;
  short
               getlen;
              *sm_arg;
  void
  void
              *kern_stack;
  register saverd;
 register
  getlen = 128;
  sm_arg = plist->uepxstor;
  kern_stack = plist->uepstack;
******************
* Call the XPI function.
* The syntax for DFHSMMCX GETMAIN is
* DFHSMMCX [CALL,]
             [CLEAR,]
            ĪΙΝ,
*
            FUNCTION(GETMAIN),
GET_LENGTH(name4 | (Rn) | expression),
STORAGE_CLASS(CICS|CICS24|SHARED_CICS|
*
*
*
                SHARED_CICS24|SHARED_USER|SHARED_USER24|USER|
                USER24 TERMINAL),
*
            SUSPEND(NO|YES),
*
             [INITIAL_IMAGE(name1 | literalconst),]
[TCTTE_ADDRESS(name4 | (Ra)),]]
            ADDRESS(name4 | (Rn) | *),
RESPONSE(name1 | *),
            REASON(name1 | *)]
* In this example, we use the GET_LENGTH, STORAGE_CLASS and
* SUSPEND input parameters, and output the ADDRESS, and the
* response and reason.
********************
  __asm(" L %0,%4 \n"
" LR %2,13\n"
        " L 13,%5\n"
         " USING DFHSMMC_ARG,%0 \n"
" DFHSMMCX CALL,CLEAR,"
"IN FUNCTION (GETMAIN) "
         "IN, FUNCTION (GETMAIN),
           "GET_LENGTH(%3),
"SUSPEND(YES),"
         "STORAGE_CLASS(USER),"
"OUT,"
           "ADDRESS(%1),"
           "RESPONSE(*),
"REASON(*)\n"
         " DROP %0\n"
" LR 13,%2"
: "=r"(rx),"=m"(pstg),"=r"(saverd)
          : "m"(getlen), "m"(sm_arg), "m"(kern_stack)
        );
  *storage = pstg;
```

CICS exit programming API example program: MTL2XPI (Part 2 of 3)

```
static void business_logic(dfhuepar_t *plist, void * storage)
static void free_storage(dfhuepar_t *plist, void *storage)
     register rx;
     register saverd;
     void *sm_arg;
void *kern_stack;
void *uepstack;
void *address;
     sm_arg = plist->uepxstor;
     kern_stack = plist->uepstack;
     address = storage;
 __asm(" L %0,%3\n"
" LR %1,13\n"
" L 13,%4\n"
             " USING DFHSMMC_ARG,%0\n"
             " DFHSMMCX CALL, CLEAR,
             "IN,"
                "FUNCTION(FREEMAIN),"
                "ADDRESS(%2),
                "STORAGE_CLASS(USER),"
                "RESPONSE(*),"
"REASON(*)\n"
             " LR 13,%1\n'
             " DROP %0"
              : "=r"(rx),"=r"(saverd)
: "m"(address),"m"(sm_arg),"m"(kern_stack)
3
#pragma prolog(mtl2xpi,"MTLENT")
#pragma epilog(mtl2xpi,"MTLXIT")
void mtl2xpi(dfhuepar_t *plist)
   __asm(" DFHUEXIT TYPE=XPIENV\n"
" COPY DFHSMMCY\n"
          "&CCN_CSECT CSECT");
  void *storage;
  get_storage(plist,&storage);
business_logic(plist,storage);
   free_storage(plist,storage);
```

CICS exit programming API example program: MTL2XPI (Part 3 of 3)

CICS definitions

The CICS API example program is, for all intents and purposes, an assembler program. It requires the normal CICS definitions, using for example CEDA or the CICS Explorer, to define it as a program and the definition to map the program to a CICS transaction.

The exit is enabled using the **ENABLE PROGRAM** command, for example via the CECI transaction:

```
CECI ENABLE PROGRAM(MTLBTXPI) EXIT('xtsereq') start
```

The exit is triggered each time a temporary storage request is to be serviced by CICS. The following command issued using the CECI transaction is an example of a request to temporary storage.

```
CECI WRITEQ TS QU('NOELNOEL') FROM('HELLO')
```

Figure 62 on page 149 describes the CEDA definition for the API example program.

```
CEDA View PROGram (METALH)
 PROGram
                : METALH
 Group
                 : NCSMETAL
                 : FIRST METAL PROGRAM
 DEScription
 Language
                : Assembler
                                        CObol | Assembler | Le370 | C | Pli
                                       No | Yes
No | Yes
                 : No
 RELoad
 RESident
                 : No
                                       Normal | Transient
                 : Normal
 USAge
 USElpacopy
                 : No
                                        No | Yes
                 : Enabled
                                        Enabled | Disabled
 Status
 RS1
                 : 00
                                       0-24 | Public
                                       Yes | No
 CEdf
                 : Yes
                                       Below | Any
User | Cics
 DAtalocation
                : Any
 EXECKey
                 : User
                   Quasirent
                                        Quasirent | Threadsafe
 COncurrency
                                        Cicsapi | Openapi
 Api
                 : Cicsapi
```

Figure 62. CICS CEDA definition for the API example program

Figure 63 on page 149 describes the CICS transaction definition.

Figure 63. CICS transaction definition

```
CEDA View TRANSaction (METO)
 TRANSaction
                   MET0
 Group
                   NCSMETAL
 DEScription
 PROGram
                   METALH
 TWasize
                 : 00000
                                        0-32767
                 : DFHCICST
 PROFile
 PArtitionset
                 : Enabled
                                        Enabled | Disabled
 STAtus
 PRIMedsize
                 : 00000
                                        0-65520
 TASKDATALoc
                                        Below | Any
                 : Any
                : User
: No
                                       User | Cics
No | Yes
 TASKDATAKey
 ST0rageclear
                                        System | 0 | 500-2700000
 RUnaway
                 : System
 SHutdown
                   Disabled
                                        Disabled | Enabled
                 : Yes
 ISolate
                                        Yes | No
```

Figure 64 on page 149 describes the CICS XPI example as defined in the CEDA.

```
CEDA View PROGram (MTLBTXPI)
 PROGram
                 : MTLBTXPI
                   : NCSMETAL
  Group
  DEScription
  Language
                                           CObol | Assembler | Le370 | C | Pli
                   : Assembler
                                           No | Yes
  RELoad
                   : No
  RESident
                   : No
                                           No | Yes
  USAge
                   : Normal
                                           Normal | Transient
  USElpacopy
                   : No
                                           No | Yes
                   : Enabled
                                          Enabled | Disabled 0-24 | Public
  Status
  RS1
                   : 00
  CEdf
                   : Yes
                                          Yes | No
                                          Below | Any
User | Cics
  DAtalocation
                   : Any
  EXECKey
                   : Cics
                                          Quasirent | Threadsafe
Cicsapi | Openapi
  COncurrency
                   : Quasirent
                   : Cicsapi
```

Figure 64. Defining the CICS XPI example in the CEDA

JCL example

The following example JCL shows you how to build the example code. You need to provide appropriate libraries in place of those shown in the example JCL, such as MTLUSR.XPLINK.LOAD and MTLUSR.METAL.OBJ.

Figure 65. CICS LNKXPI JCL example

```
//MTLUSRO JOB (999,POK),'CICSASM',CLASS=A,MSGCLASS=H,NOTIFY=&SYSUID
//XPIASM PROC DSN=,MEM=
//**********************
//* run ASM
//********************
//STEPASM EXEC PGM=ASMA90,PARM=OBJECT,REGION=OM
//SYSUT1 DD UNIT=SYSDA,SPACE=(CYL,(1,1))
//SYSPRINT DD SYSOUT=*
        DD DSN=&DSN(&MEM), DISP=SHR
//SYSIN
//SYSLIN DD DISP=SHR,DSN=MTLUSR.METAL.OBJ(&MEM)
//SYSLIB DD DISP=SHR, DSN=SYS1.MACLIB
          DD DISP=SHR, DSN=CICSTS41.CICS.SDFHMAC
          DD DISP=SHR, DSN=CEE.SCEEMAC
// PEND
//*********************
//* START OF COMPILES:
///*****************************
//COMP
         EXEC XPIASM, DSN='DEV.METALC.SAMPCODE', MEM='MTLBTXPI'
```

Figure 66. CICS ASMXPI JCL example

```
//MTLUSRPC JOB (999, POK), 'CCOMP', NOTIFY=&SYSUID,
    CLASS=A, MSGCLASS=H
//*--
//* CICS Metal JCL
///**************************
//* Compile the code
//*********************************
          PROC IDSN=, ADSN=, ODSN=, MEM=
//CCAM
//CC
          EXEC PGM=CCNDRVR, REGION=OM,
// PARM=('OPTFILE(DD:OPTIONS)')
//STEPLIB DD DISP=SHR, DSN=MTLCICS.METALC.SCCNCMP
          DD DSN=CICSTS41.CICS.SDFHLOAD,DISP=SHR
          DD DISP=SHR, DSN=CEE.SCEERUN
          DD DISP=SHR, DSN=CEE.SCEERUN2
//OPTIONS
          DD DISP=SHR, DSN=MTLCICS.METALC.SAMPJCL(OPTXPI)
          DD PATH='/usr/include/metal',PATHOPTS=ORDONLY
//SYSLIB
          DD DSN=CICSTS41.CICS.SDFHC370,DISP=SHR
DD DSN=CICSTS41.CICS.SDFHMAC,DISP=SHR
          DD DSN=MTLCICS.METALC.SAMPMAC,DISP=SHR
//******************
              UNIT=SYSDA, SPACE=(32000, (30, 30))
//SYSUT1
              DCB=(RECFM=FB, LRECL=80, BLKSIZE=3200)
//SYSUT4
          DD
              UNIT=SYSDA, SPACE=(32000, (30, 30))
              DCB=(RECFM=FB, LRECL=80, BLKSIZE=3200)
              UNIT=SYSDA, SPACE=(32000, (30, 30))
//SYSUT5
          DD
              DCB=(RECFM=FB, LRECL=3200, BLKSIZE=12800)
          DD
//SYSUT6
              UNIT=SYSDA, SPACE=(32000, (30, 30))
              DCB=(RECFM=FB, LRECL=3200, BLKSIZE=12800)
//SYSUT7
              UNIT=SYSDA, SPACE=(32000, (30, 30))
              DCB=(RECFM=FB,LRECL=3200,BLKSIZE=12800)
UNIT=SYSDA,SPACE=(32000,(30,30)),
//SYSUT8
          DD
              DCB=(RECFM=FB, LRECL=3200, BLKSIZE=12800)
              UNIT=SYSDA,SPACE=(32000,(30,30)),
DCB=(RECFM=VB,LRECL=137,BLKSIZE=882)
//SYSUT9
//SYSUT10
              SYSOUT=*
          DD
              UNIT=SYSDA, SPACE=(32000, (30, 30))
//SYSUT14
         DD
              DCB=(RECFM=FB, LRECL=3200, BLKSIZE=12800)
//SYSUT15 DD
              SYSOUT=*
//***************
//SYSPRINT DD SYSOUT=*
//SYSOUT
          DD SYSOUT=*
//SYSCPRT DD SYSOUT=*
           DD DSN=&&SYSLIN, DISP=(NEW, PASS), SPACE=(TRK, (10, 100)),
//*SYSLIN
           UNIT=SYSDA, BLKSIZE=3200, LRECL=80, RECFM=FB, DSORG=PS
//SYSLIN
          DD DISP=SHR, DSN=&ADSN(&MEM)
//SYSIN
          DD DISP=SHR, DSN=&IDSN(&MEM)
//***********************
//* Assemble the code
//***********************
//ASM
         EXEC PGM=ASMA90, REGION=OM, PARM='GOFF'
//SYSLIB
          DD DSN=SYS1.MACLIB, DISP=SHR
//
          DD DISP=SHR, DSN=CICSTS41.CICS.SDFHMAC
          DD DISP=SHR, DSN=CEE.SCEEMAC
//
          DD DSN=MTLCICS.METALC.SAMPMAC,DISP=SHR
//SYSUT1
          DD UNIT=(SYSDA, SEP=SYSLIB), SPACE=(CYL, (10,5)), DSN=&SYSUT1
//SYSPRINT DD
              SYSOUT=*
//SYSLIN
              DISP=SHR, DSN=&ODSN(&MEM)
//SYSIN
              DISP=SHR, DSN=&ADSN(&MEM)
// PEND
//*
//COMP
          EXEC CCAM, IDSN='MTLCICS.METALC.SAMPCODE',
          ADSN='MTLUSR.METAL.GENASM'
//
          ODSN='MTLUSR.METAL.OBJ', MEM=MTL2XPI
//*
```

Figure 67. CICS CCXPI JCL example

```
METAL GENASM

OPT(0) PHASEID LANGLVL(EXTENDED)

SO LIST CSECT

float(ieee)

DEF(MVS,CM_MVS,_TCP31_PROTOS)

nose se(/usr/include/metal, DD:SYSLIB)

SSCOM

AGG

RENT
```

Figure 68. CICS OPTXPI JCL example

Appendix C. Accessibility

Accessible publications for this product are offered through IBM Documentation for z/OS (www.ibm.com/docs/en/zos).

If you experience difficulty with the accessibility of any z/OS documentation see $\underline{\text{How to Send Feedback to}}$ IBM to leave documentation feedback.

Notices

This information was developed for products and services that are offered in the USA or elsewhere.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
United States of America

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing Legal and Intellectual Property Law IBM Japan Ltd. 19-21, Nihonbashi-Hakozakicho, Chuo-ku Tokyo 103-8510, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

This information could include missing, incorrect, or broken hyperlinks. Hyperlinks are maintained in only the HTML plug-in output for IBM Documentation. Use of hyperlinks in other output formats of this information is at your own risk.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation Site Counsel 2455 South Road Poughkeepsie, NY 12601-5400 USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or

reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

IBM Online Privacy Statement

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information about this offering's use of cookies is set forth below.

Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's name, email address, phone number, or other personally identifiable information for purposes of enhanced user usability and single sign-on configuration. These cookies can be disabled, but disabling them will also eliminate the functionality they enable.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at ibm.com®/privacy and IBM's Online Privacy Statement at ibm.com/privacy/details in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at ibm.com/software/info/product-privacy.

Policy for unsupported hardware

Various z/OS elements, such as DFSMSdfp, JES2, and MVS, contain code that supports specific hardware servers or devices. In some cases, this device-related element support remains in the product even after the hardware devices pass their announced End of Service date. z/OS may continue to service element code; however, it will not provide service related to unsupported hardware devices. Software problems related to these devices will not be accepted for service, and current service activity will cease if a problem is determined to be associated with out-of-support devices. In such cases, fixes will not be issued.

Minimum supported hardware

The minimum supported hardware for z/OS releases identified in z/OS announcements can subsequently change when service for particular servers or devices is withdrawn. Likewise, the levels of other software products supported on a particular release of z/OS are subject to the service support lifecycle of those

products. Therefore, z/OS and its product publications (for example, panels, samples, messages, and product documentation) can include references to hardware and software that is no longer supported.

- For information about software support lifecycle, see: IBM Lifecycle Support for z/OS (www.ibm.com/software/support/systemsz/lifecycle)
- For information about currently-supported IBM hardware, contact your IBM representative.

Programming interface information

This information documents intended programming interfaces that allow the customer to write programs to obtain the services of z/OS Metal C runtime library.

Standards

The following standards are supported in combination with the z/OS Metal C runtime library:

• The C language is consistent with *Programming languages - C (ISO/IEC 9899:1999)*. This standard has officially replaced American National Standard for Information Systems-Programming Language C (X3.159–1989) and is technically equivalent to the ISO C standard. The compiler supports the changes adopted into the C Standard by ISO/IEC 9899:1990/Amendment 1:1994. For more information on ISO, see International Organization for Standardization (ISO) (www.iso.org).

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names If these and other IBM trademarked terms are marked on their first occurrence in this information with a trademark symbol (° or ™), these symbols indicate U.S. registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of IBM trademarks is available on the Web at Copyright and Trademark information (www.ibm.com/legal/copytrade.shtml).

Adobe, Acrobat, and PostScript are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

IEEE is a trademark of the Institute of Electrical and Electronics Engineers, Inc. in the United States and other countries.

Other company, product, and service names might be trademarks or service marks of others.

Index

Special Characters	accessibility (continued)
•	contact IBM <u>153</u>
asm operand lists	ADATA debugging information
defining read-writeasm operands	additional source-level information
24	output file format <u>47</u>
asm operands	CDAASMC procedure 47
C expressions asasm operands 21	CDAHLASM invocation 47
defining	addressing mode
read-writeasm operands	and global SET symbols <u>14</u>
24	and passing parameters 2
multiple	attributes
defining <u>22</u>	amode31 <u>28</u>
read-write <u>24</u>	amode64 <u>28</u>
asm statement	recognition of <u>28</u>
inserting your own assembly instructions 20	switching
using	commands 43
code format string 20	example 28
asm statements	ALESERV HLASM macro
C expressions asasm operands 21	allocating alternative data spaces 34
code format string 21	ALET
constraints 21	far pointer 32
examples	implicit association 34
read-writeasm operands	ALIAS instructions
24	recognition of 4
specifiers 21	allocating
cinit() library function 67	realloc() 81
far qualifier	allocation
far pointer 32	_MI_BUILTN macro 36
malloc31() library function 76	of data space 36
_cterm() library function 70	alphabetic character attribute 72
_MI_BUILTN macro	alternative data spaces
data space allocation 36	accessing 34
_MI.BUILTN macro	allocating 34
AR-mode functions 35	AMODE
far-pointer management 34	and global SET symbols 14
-mgoff HLASM option	and passing parameters 2
and Metal C programs 42	function save areas 3
# pragma insert_asm	return values 2
inserting your own assembly statements 27	switching
#pragma directive	commands 43
MYEPILOG 12	example 28
MYPROLOG 12	external function calls 28
+ constraint	internal function calls 28
defining read-writeasm operands	AR mode
25	linkage conventions 35
_	programming support
A	far-pointer management 34
Λ	AR-mode functions
abs() library function 64	accessing alternative data spaces 34
absolute value	ALET associations 34
integer argument 64	built-in functions 35
access registers	C language constructs and far pointers 33
AR mode 34	data space allocation 36, 39
management by compiler 34	default prolog and epilog code 35
restoring 35	far pointers
saving 35	declaration 32
accessibility	dereference 32
,	

AR-mode functions (continued)	building Metal C programs (continued)
far pointers (continued)	assembly step (continued)
reference 32	symbols longer than eight characters 42
memory references 34	built-in functions
arguments	AR-mode functions 35
accessing 114	far-pointer management
ARMODE compiler option 32	AR-mode programming support 34
armode function attribute 32	builtins.h header file
as command	data space allocation 36
building Metal C programs 42	far versions of library functions 35
ASC mode	far-pointer management 34
restoring <u>35</u>	
switching <u>35</u>	C
ASMLANGX debugging utility	
debugging information format 47	C expressions
ASMLANGX utility	used asasm operands 21
additional source-level information	C language constructs
ADATA debugging information 47	far pointers 33
assembly job step 44	C memory functions
assembly language programs	
debugging 47	far versions 35
load module size 47	C string functions
source-level information 47	far versions <u>35</u>
	C string pointer
assembly statements	copying to far pointer <u>39</u>
embedding	C symbols
code format string 20	name-encoding <u>4</u>
example, simple <u>20</u>	calloc() library function 67
file-scope header <u>5</u>	CDAASMC JCL procedure
function entry point markers <u>8</u>	binder invocation 43
function headers 8	extracting source-level information 47
function property blocks 8	invoking 44
making a C expression available to HLASM 22	CDAHLASM
making a C variable available to HLASM 21	invocation 47
making a C variable expression anasm operand	
21	CEE.SCEEPROC data set
operands 22	binder invocation batch procedures <u>43</u>
inserting	characters
executable 20	conversions
	lowercase <u>113</u>
non-executable <u>27</u>	uppercase <u>113</u>
user-supplied 19	finding in a string <u>101</u>
assistive technologies <u>153</u>	CICS
atoi() library function <u>65</u>	CICS API example 123
atol() library function <u>65</u>	CICS definitions 148
atoll() library function <u>66</u>	CICS XPI example 138
	JCL example 149
D.	programming interface examples 123
В	runtime environment adapter 123
hatah anyiranmant	
batch environment	CICS programming interface examples 123
binder invocation procedures <u>43</u>	classifying characters <u>71</u>
building Metal C programs	clobber list
assembly step <u>44</u>	example <u>23</u>
bind step <u>44</u>	code base registers <u>4</u>
compilation step <u>43</u>	code format string
debugging assembly language programs 47	description 20
debugging information 47	in anasm statement 21
extracting source-level information 47	substitution specifiers 21
f 29	treatment of 20
IDF debugging information 47	code format strings
bind job step 44	data space allocation 36
blank character attribute 72	examples
buffers	read-writeasm operands
format and print data 116	24
building Metal C programs	codeset
assembly step	conversion utilities

codeset (continuea)	debugging (continuea)
conversion utilities (continued)	extracting source-level information (continued)
iso646.h header file 54	ASMLANGX 47
command	IDF 48
syntax diagrams xiii	in a batch environment 47
comparing	Interactive Debug Facility (IDF) 47
. •	interactive utility 48
strcmp() <u>96</u>	
strcspn() 97	source-level information 47
strings <u>96, 97, 99</u>	div_t structure 70
strncmp() <u>99</u>	div() library function 70
compilation job step <u>43</u>	division <u>70</u>
compiler options	DSA
AMODE	acquisition and release 3
characteristics of compiler-generated assembly	address space 35
source code 4	and global SET symbols 14
ARMODE NOARMODE 32	default
EPILOG	AR-mode functions 35
versus #pragma epilog 12	function save areas 3
LONGNAME	location 35
entry point definitions 8	obtaining 12
entry point marker <u>8</u>	obtaining and releasing 19
external symbols 5	pointer 19
function property blocks <u>8</u>	preallocation <u>12</u>
LP64	DSECT statement
characteristics of compiler-generated assembly	and file-scope trailers <u>11</u>
source code <u>4</u>	DSPSERV HLASM macro
programming with Metal C 1	allocating alternative data spaces 34
PROLOG	DWARF debugging information
versus #pragma prolog 12	CDAASMC procedure 47
concatenating	CDAHLASM invocation 47
strcat() 94	dynamic storage area
strings 94, 99	acquisition and release 3
strncat() 99	function save areas 3
constants	location 35
defining 11	obtaining and releasing 19, 35
contact	preallocation 12
z/OS 153	preattocation 12
· · · · · · · · · · · · · · · · · · ·	
conversions	E
character	
to lowercase $\frac{113}{143}$	entry point markers
to uppercase <u>113</u>	defining
specifier	under LONGNAME compiler option 8
argument in sscanf() <u>91</u>	entry points
string to unsigned integer <u>111</u>	defining
copying	under LONGNAME compiler option 8
strcpy() 96	epilog code
strings 9 6, 100	AR-mode functions 12, 35
strncpy() 100	default
CSECT 4	
ctype.h header file 51	AR-mode functions 35
<u> </u>	DSA pointer 19
	NAB pointer 19
D	primary functions <u>12</u>
	sample <u>18</u>
data spaces	supplying your own <u>12</u>
access 32	EXIT_FAILURE macro 59
accessing 39	EXIT_SUCCESS macro 59
allocation 36	external symbols
deallocation 36, 39	and generated HLASM code 4
referencing 39	external variables
debugging	defining 11
assembly language programs 47	initializing 11
data formats 47	
extracting source-level information	
ADATA 47	
· ·=· · · · · · · ·	

F	GOFF HLASM option
	and ALIAS instructions <u>4</u>
F4SA save area format	when to specify <u>42</u>
and AMODE <u>3</u>	GPRs
and NAB <u>3</u>	and global SET symbols <u>14</u>
F7SA save area format	
and AMODE <u>3</u>	H
and NAB <u>3</u>	"
far pointers	header files
ALET associations 34	builtins.h
C language constructs <u>33</u>	data space allocation 36
constructing <u>34</u>	far-pointer management 34
copied from C string pointers 39	iso646.h header file 54
declaration <u>32</u>	stdbool.h header file 57
dereference 32	stdint.h header file 58
dereferencing 39	string.h
passing and returning 35	data space allocation 36
reference 32	strings.h
setting and getting	data space allocation 36
_MI.BUILTN macro <u>34</u>	heap services
built-in functions 34	user-replaceable 62
far_strcpy library function	hexadecimal 72
data space allocation 39	HLASM
file-scope header	as utility
structure 5	invoking 42
file-scope trailers	global SET symbols
structures <u>11</u>	values 8
float.h header file <u>51</u>	ld utility
formatted I/O <u>83</u>	invoking 42
free() library function 71	HLASM opotions
function entry point markers	GOFF
structures <u>8</u>	and ALIAS instructions 4
function headers	HLASM options
structures <u>8</u>	with LONGNAME compiler option 42
function property blocks	HLASM source program, compiler-generated
defining	characteristics 4
under LONGNAME compiler option <u>8</u>	HLASM source programs
structures <u>8</u>	file-scope headers 5
function prototypes	file-scope trailers
and AMODE <u>28</u>	debug data block 11
function save area	function elements 8
chaining <u>12</u>	structures 4
function save areas	
AMODE 3	I
formats 3	*
setup <u>3</u>	IDF debugger
functions	invocation 48
AR-mode	insert_asm pragma
prototypes 32	inserting your own assembly statements 27
arguments <u>114</u>	integer
attributes	pseudo-random 80, 81
AR-mode <u>32</u>	Interactive Debug Facility (IDF)
prototypes	generation of information 47
AR-mode <u>32</u>	inttypes.h header file 53
	IPA and HOT options
G	to build Metal C programs 44
	isalnum() library function 71, 72
global SET symbols	isalpha() library function 72
and function entry point markers $\underline{8}$	isblank() library function 72
and function headers <u>8</u>	iscntrl() library function 72
function property blocks 8	isdigit() library function 72
global variables	isgraph() library function 72
register specification 27	islower() library function 72
storage of 27	

iso646.h header file 54 isprint() library function 72 ispunct() library function 72 isspace() library function 72 isupper() library function 72 isxdigit() library function 72	memchr() library function 77 memcmp() library function 77 memcpy() library function 78 memmove() library function 79 memory allocation 81 memory references
J	AR mode <u>34</u> memset() library function 79
JCL	Metal C
assembly job step 44	feature and benefits <u>1</u> Metal C function descriptors 39
bind job step 44 compilation job step 43	Metal C programs
JCL procedures	argc argv parsing 31
CEE.SCEEPROC data set <u>43</u> to build Metal C programs <u>43</u>	building alternative name for "main" 40
to build Metal C programs 43	assembly step 42
K	compilation step <u>42</u> xlc utility 42
kovboord	z/OS UNIX System Services
keyboard navigation 153	42
PF keys 153	IPA and HOT enablement Example 46
shortcut keys <u>153</u>	JCL procedures to build 43
L	ld command <u>42</u> reentrant Metal C program 29
	RENT option 29
labs() library function 73	metal.h header file 56
ld command building Metal C programs	MVS linkage conventions and Metal C 2
bind options 42	MYEPILOG #pragma directive
ldiv() library function 74	using 12
length function 98 library functions	MYPROLOG #pragma directive using 12
far versions <u>35</u>	using <u>12</u>
limits.h header file <u>55</u> linkage conventions	N
AR-mode functions	NAD linkage automaion
ASC mode <u>35</u>	NAB linkage extension description 3
MVS and Metal C 2	name encoding
Linkage Editor TEST option and load module size 47	and C symbols 4
list form of a macro	navigation keyboard 153
specifying and using <u>26</u> llabs() library function 74	next available byte (NAB)
lldiv() library function 75	pre-allocated stack space 3 noarmode function attribute 32
locale	NOTEST assembler option
iso646.h header file <u>54</u> locating storage 71	and load module size 47
LONGNAME compiler option	NULL macro <u>57</u> , <u>58</u>
and HLASM options <u>42</u>	NULL pointer <u>57</u> NULL pointer constant 59
and Metal C programs <u>42</u> lowercase	numbers 71
tolower() 113	
	0
M	object code control
mainframe	address space control 32
education <u>xiii</u>	ASC mode <u>32</u> offsetof macro 57
malloc() library function <u>75</u> matching failure 94	
math.h header file 56	P
MB_CUR_MAX macro 59	parameter passing
memccpy() library function 76	parameter passing

parameter passing (continued)	S
and AMODE 2	anua aura fauranta
parameters	save area formats
and global SET symbols <u>14</u>	and AMODE 3
pointers	and NAB <u>3</u>
storing 22	scanning
precision argument, fprintf() family <u>86</u>	sscanf() <u>89</u> SCCNSAM data set
printing	
sprintf() <u>83</u> vsprintf() <u>11</u> 6	epilog code sample 18
prolog	prolog code sample <u>17</u>
user-supplied	searching strchr() 95
global SET symbols 14	string <u>95,</u> 101
prolog code	strings <u>75, 101</u> strings for tokens 106, 107
AR-mode functions 12, 35	strspn() 102
default	seed for random numbers 89
AR-mode functions 35	SET symbols
DSA pointer 19	and AMODE 14
NAB pointer 19	and DSA 14
primary functions 12	and GPRs 14
sample 17	and number of fixed parameters 14
ptrdiff_t type in stddef header file 57	and storage instructions 14
p	compiler-defined 14
	for a user-supplied prolog 14
Q	shortcut keys 153
qsort() library function 80	size_t structure 57
qsort() library function <u>so</u>	snprintf() library function 82
	source-level information
R	extracting 47
DAND MAY 50	extracting in a batch environment
RAND_MAX macro 59	CDAASMC 47
rand_r() library function 81	for dissasembly
rand() library function <u>80</u>	suppressing 47
random	for IDF 47
number generator <u>80, 81</u> number initializer 89	space (white space)
rand_r() 81	characters
rand() 80	testing <u>72</u>
srand() 89	sprintf() library function <u>83</u>
read-write operands,	srand() library function 89
defining	sscanf() library function <u>89</u>
using the + constraint 25	stack
reading	allocating space <u>26</u>
formatted 89	pre-allocated stack space 3
scanning 89	standard save area format
realloc() library function 81	and AMODE 3
reallocation of block size 81	and NAB <u>3</u>
reentrancy 4	static variables
register storage class specifier	defining 11
register specification 27	mapping <u>11</u>
registers	stdarg.h header file <u>57</u>
access 34	stdbool.h header file <u>57</u>
clobbering 23	stddef.h header file <u>57</u>
controlling use of 23	stdint.h header file <u>58</u>
hardware access 32	stdio.h header file <u>57</u>
specified asasm operands 21	stdlib.h header file <u>59</u>
specifying 27	storage allocation 81
remainder 70	storage instructions
resource limits defined 55	and global SET symbols 14
return values	strcat() library function 94
AMODE 2	streat() library function 95
formats $\frac{1}{2}$	strcmp() library function 96
setup 2	strcpy() library function 96
	strespn() library function 97

strdup() library function <u>98</u>	user interface (continued)		
streams	ISPF <u>153</u>		
formatted I/O <u>89</u>	TSO/E <u>153</u>		
string.h header file <u>60</u>	user-replaceable heap services <u>62</u>		
strings			
comparing <u>97</u> , <u>99</u>	V		
concatenating <u>94</u> , <u>99</u>	•		
conversions	va_arg() macro 114		
to unsigned integer 111	va_end() macro 114		
copying 96, 100	va_start() macro 114		
ignoring case 96, 97	variables		
initializing 100	making a C variable available to HLASM 21		
length of 98	vsnprintf() library function 115		
searching	vsprintf() library function 116		
strspn() 102	vsscanf() library function 116		
searching for tokens 106, 107	vsscarr() library function 110		
substring			
locating 103	X		
strings.h header file			
data space allocation 36	xlc utility		
strlen() library function 98	and HLASM source file 42		
strncat() library function 99	_		
	Z		
strncmp() library function 99	2		
strncpy library function	z/OS Basic Skills Documentation xiii		
data space allocation 36	z/OS UNIX System		
strncpy() library function 100	Services		
strpbrk() library function 101	as utility		
strrchr() library function 102			
strspn() library function 102	bind options <u>42</u>		
strstr() library function 103	ld utility		
strtod() library function <u>103</u>	bind options <u>42</u>		
strtof() library function <u>105</u>			
strtok_r() library function <u>107</u>			
strtok() library function <u>106</u>			
strtol() library function 107			
strtold() library function 108			
strtoll() library function 110			
strtoul() library function 111			
strtoull() library function 112			
syntax diagrams			
how to read xiii			
syntax of format for sprintf() 83			
,			
-			
Т			
TECT assembler ention			
TEST assembler option			
and load module size <u>47</u>			
testing			
characters			
white space 72			
numbers			
hexadecimal 72			
tokens			
strtok_r() <u>107</u>			
strtok() <u>106</u>			
tolower() library function 113			
toupper() library function <u>113</u>			
U			
uppercase			
toupper() <u>113</u>			

user interface

IBW.

Product Number: 5655-ZOS

SC14-7313-60

