Baseline comparison on off-grid AFDM channels

40 candidate users | 16 pilot frames | 16 receive antennas

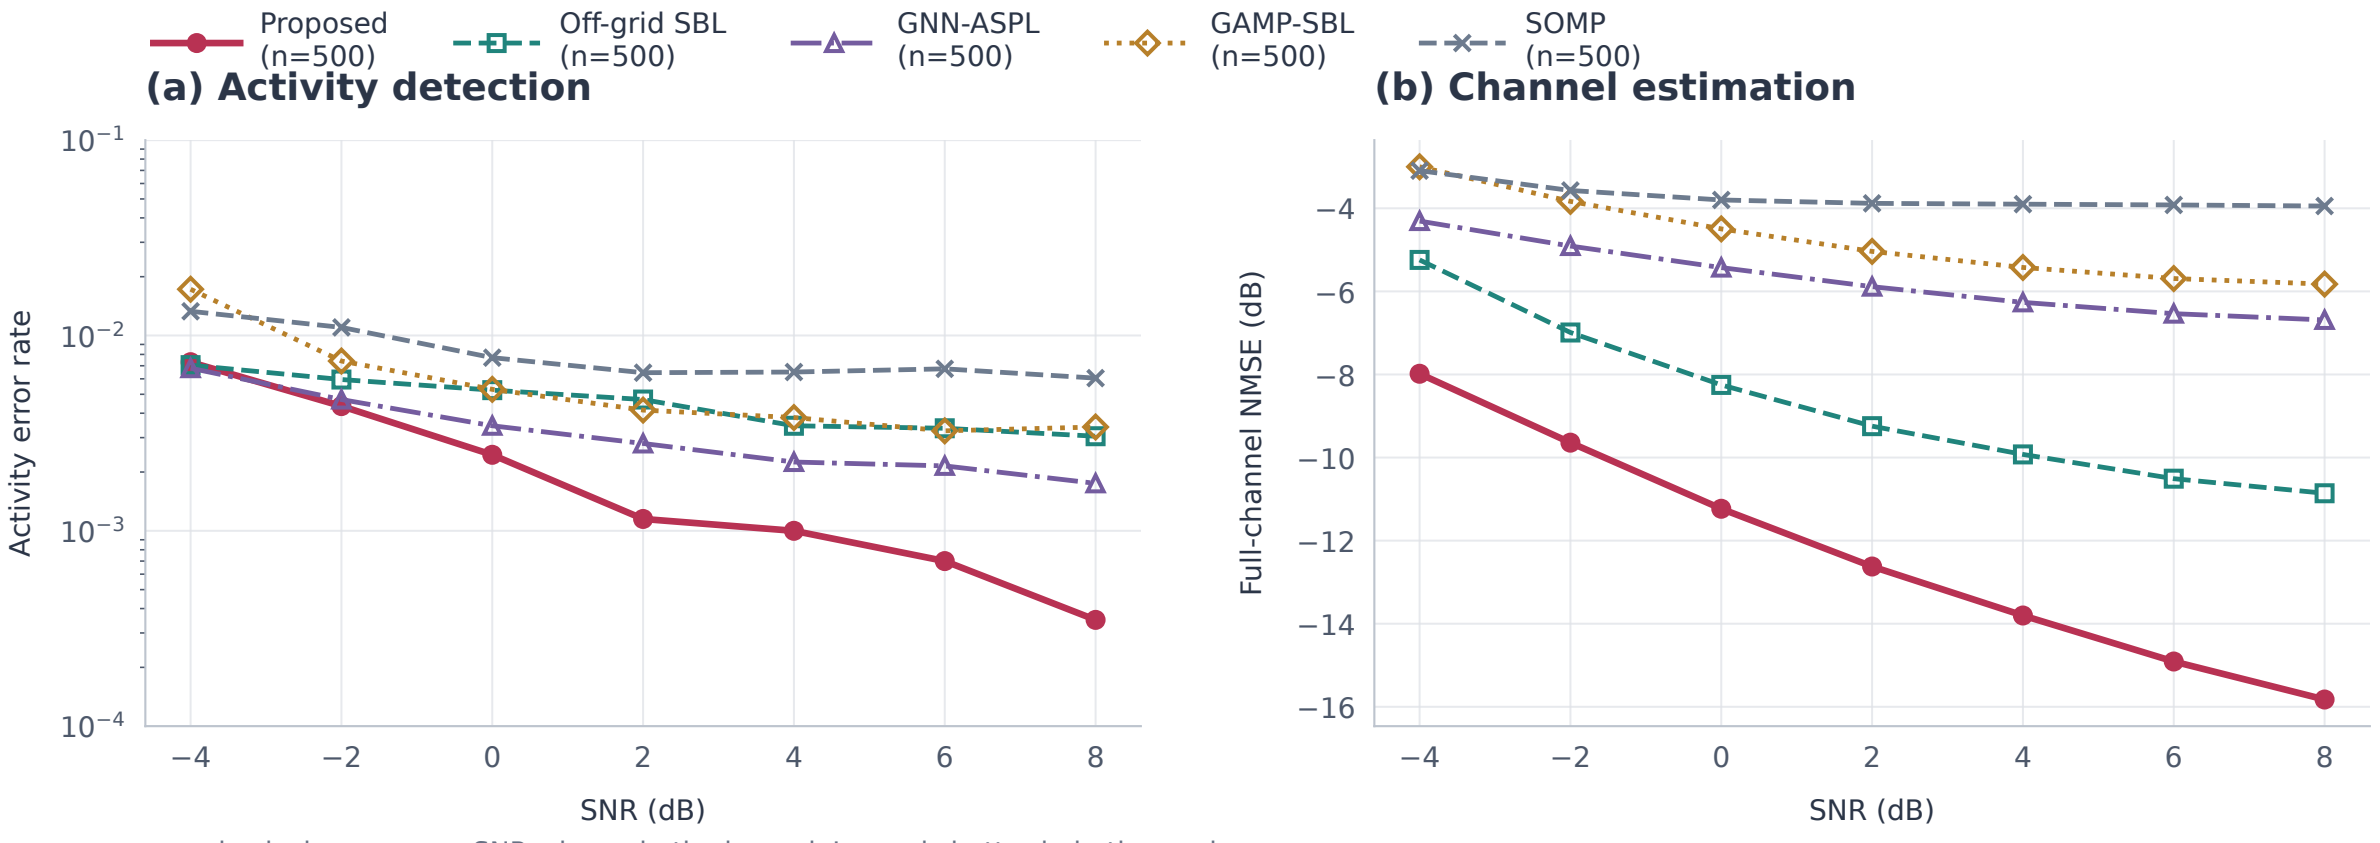

n = physical scenes per SNR, shown in the legend. Lower is better in both panels.

All methods use the same 500 scenes and estimated phases. Each scene is reused across SNR.

Frozen receiver settings and activity thresholds. Noise variance estimated from observations for all methods.