Performance across channel models

40 candidate users | 16 pilot frames | 16 receive antennas | Fixed trained weights

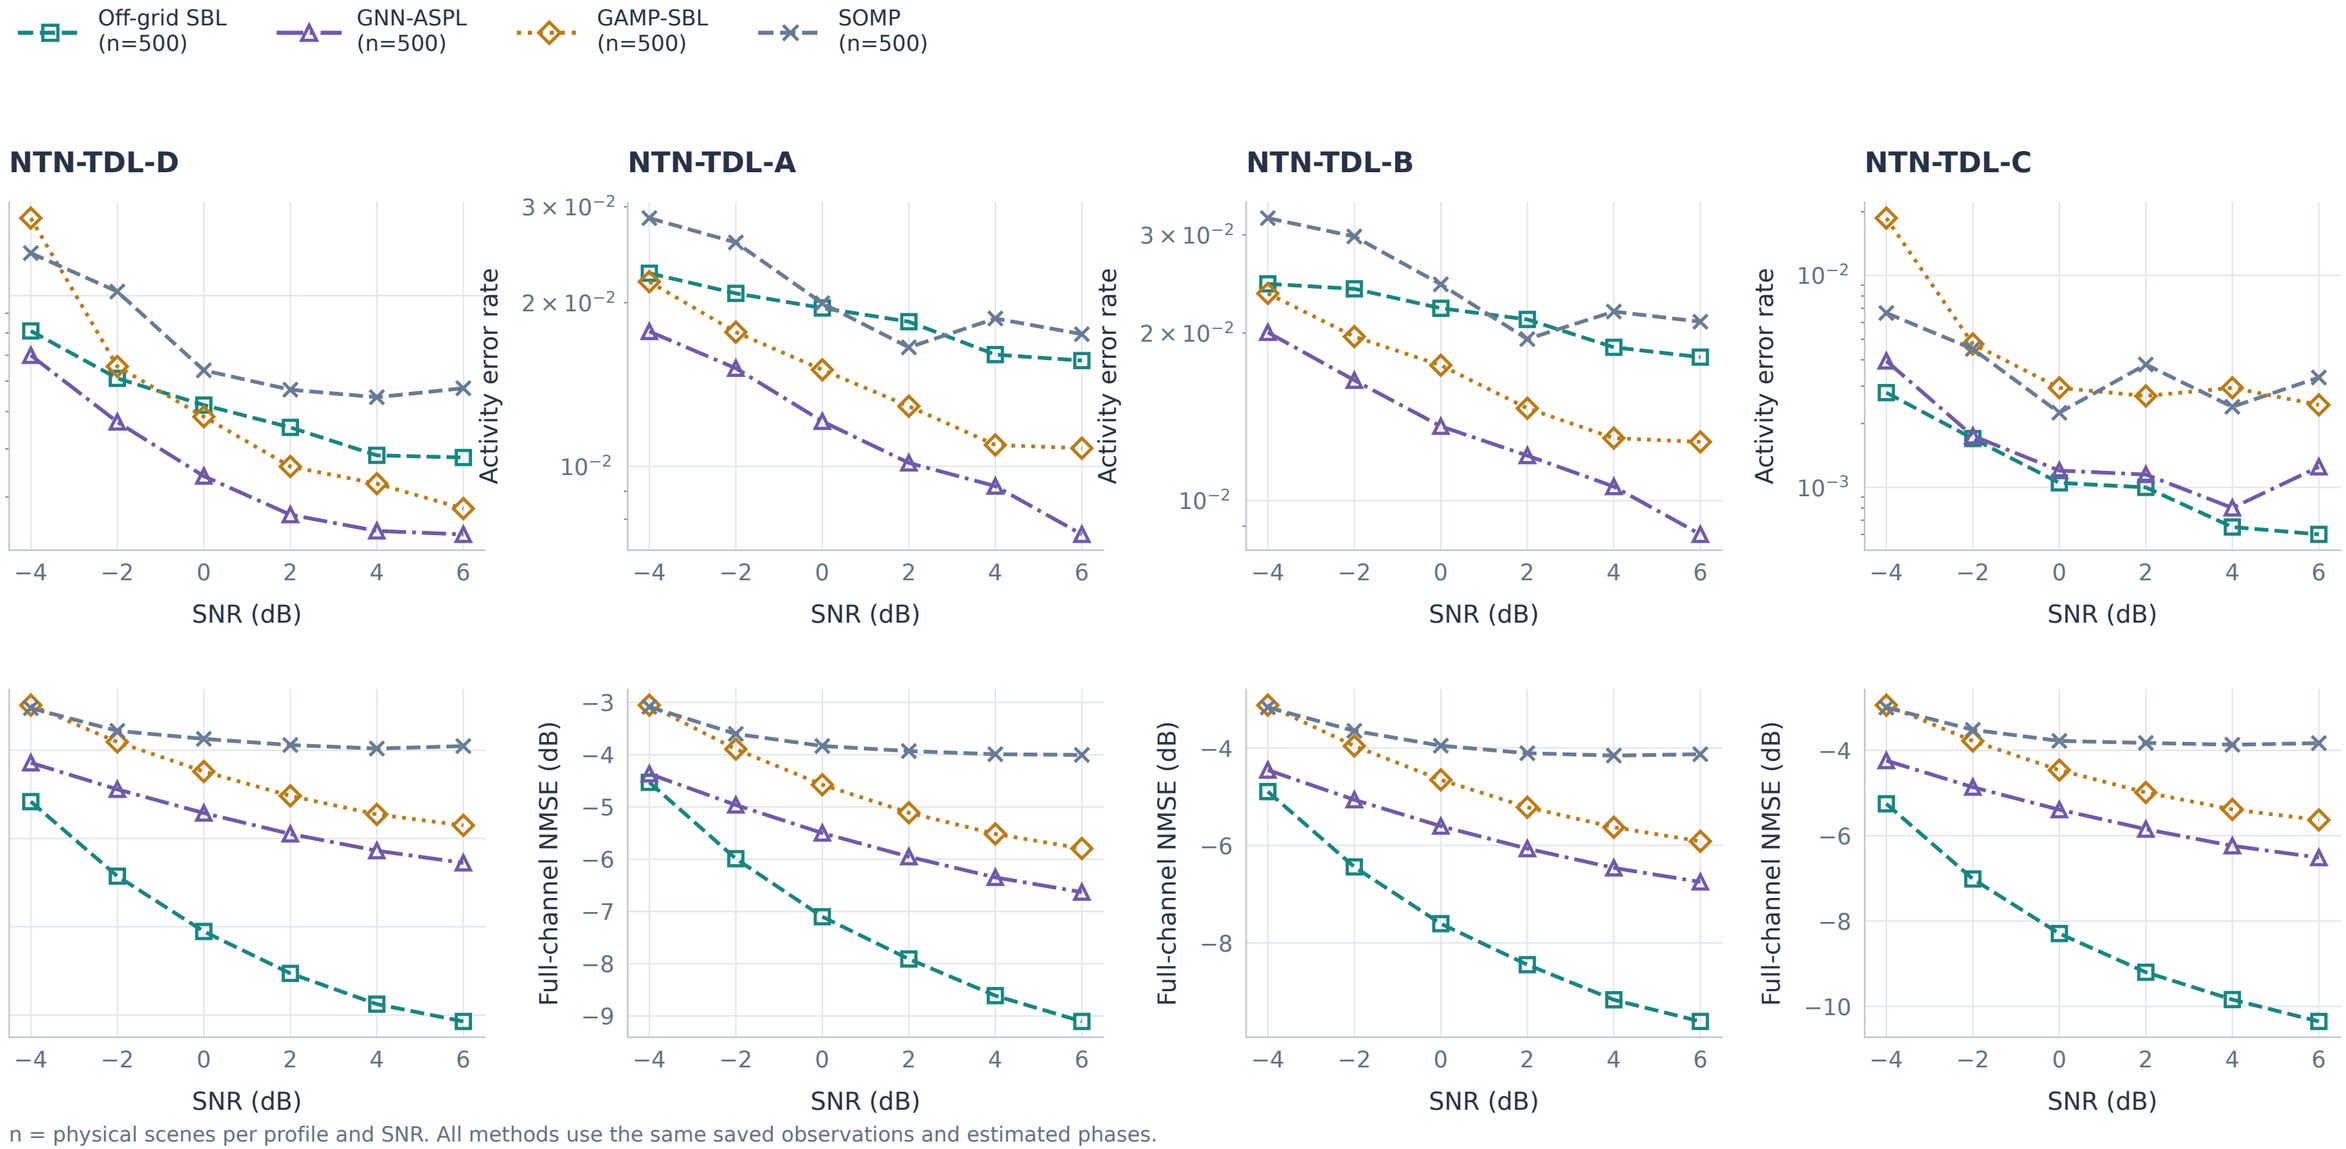

n = physical scenes per profile and SNR. All methods use the same saved observations and estimated phases.

Tabulated power-delay and fading profiles under the fixed project geometry; estimated noise.