Off-grid SBL candidate-count comparison

40 candidate users | 16 pilot frames | 120-iteration budget

Off-grid SBL (6 candidates/user) (n=500)

Off-grid SBL (12 candidates/user) (n=500)

Off-grid SBL (24 candidates/user) (n=500)

Activity detection

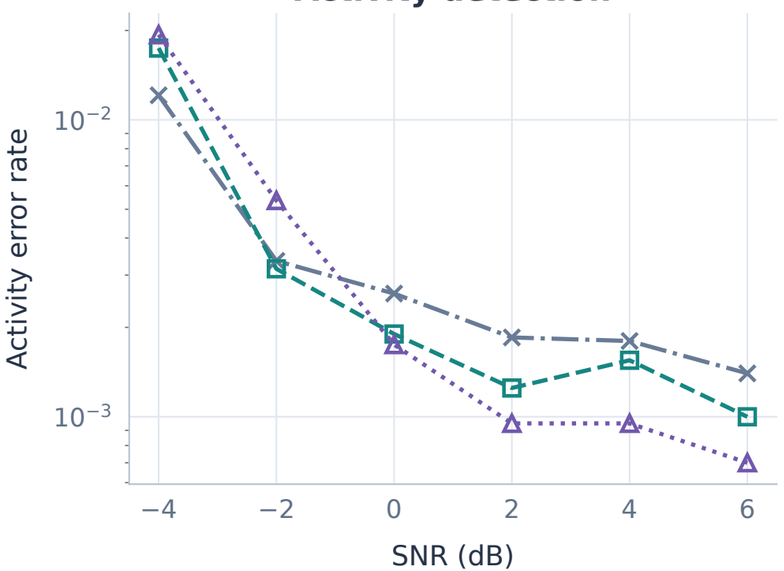

Channel estimation

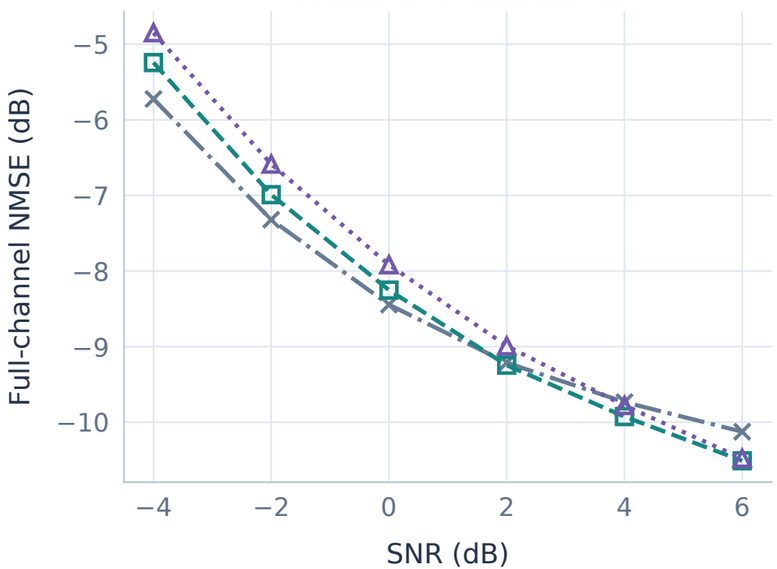

Conditional receiver time

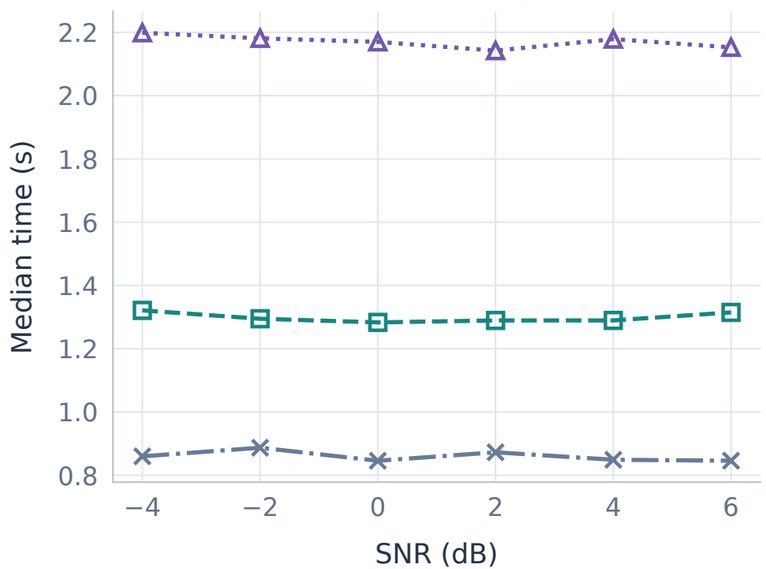

n = paired physical scenes per SNR. Each configuration uses its independently calibrated activity threshold.

Timing excludes shared phase estimation; concurrent workloads may affect absolute time.