Baseline performance versus SNR

40 candidate users | 16 pilot frames | 16 receive antennas

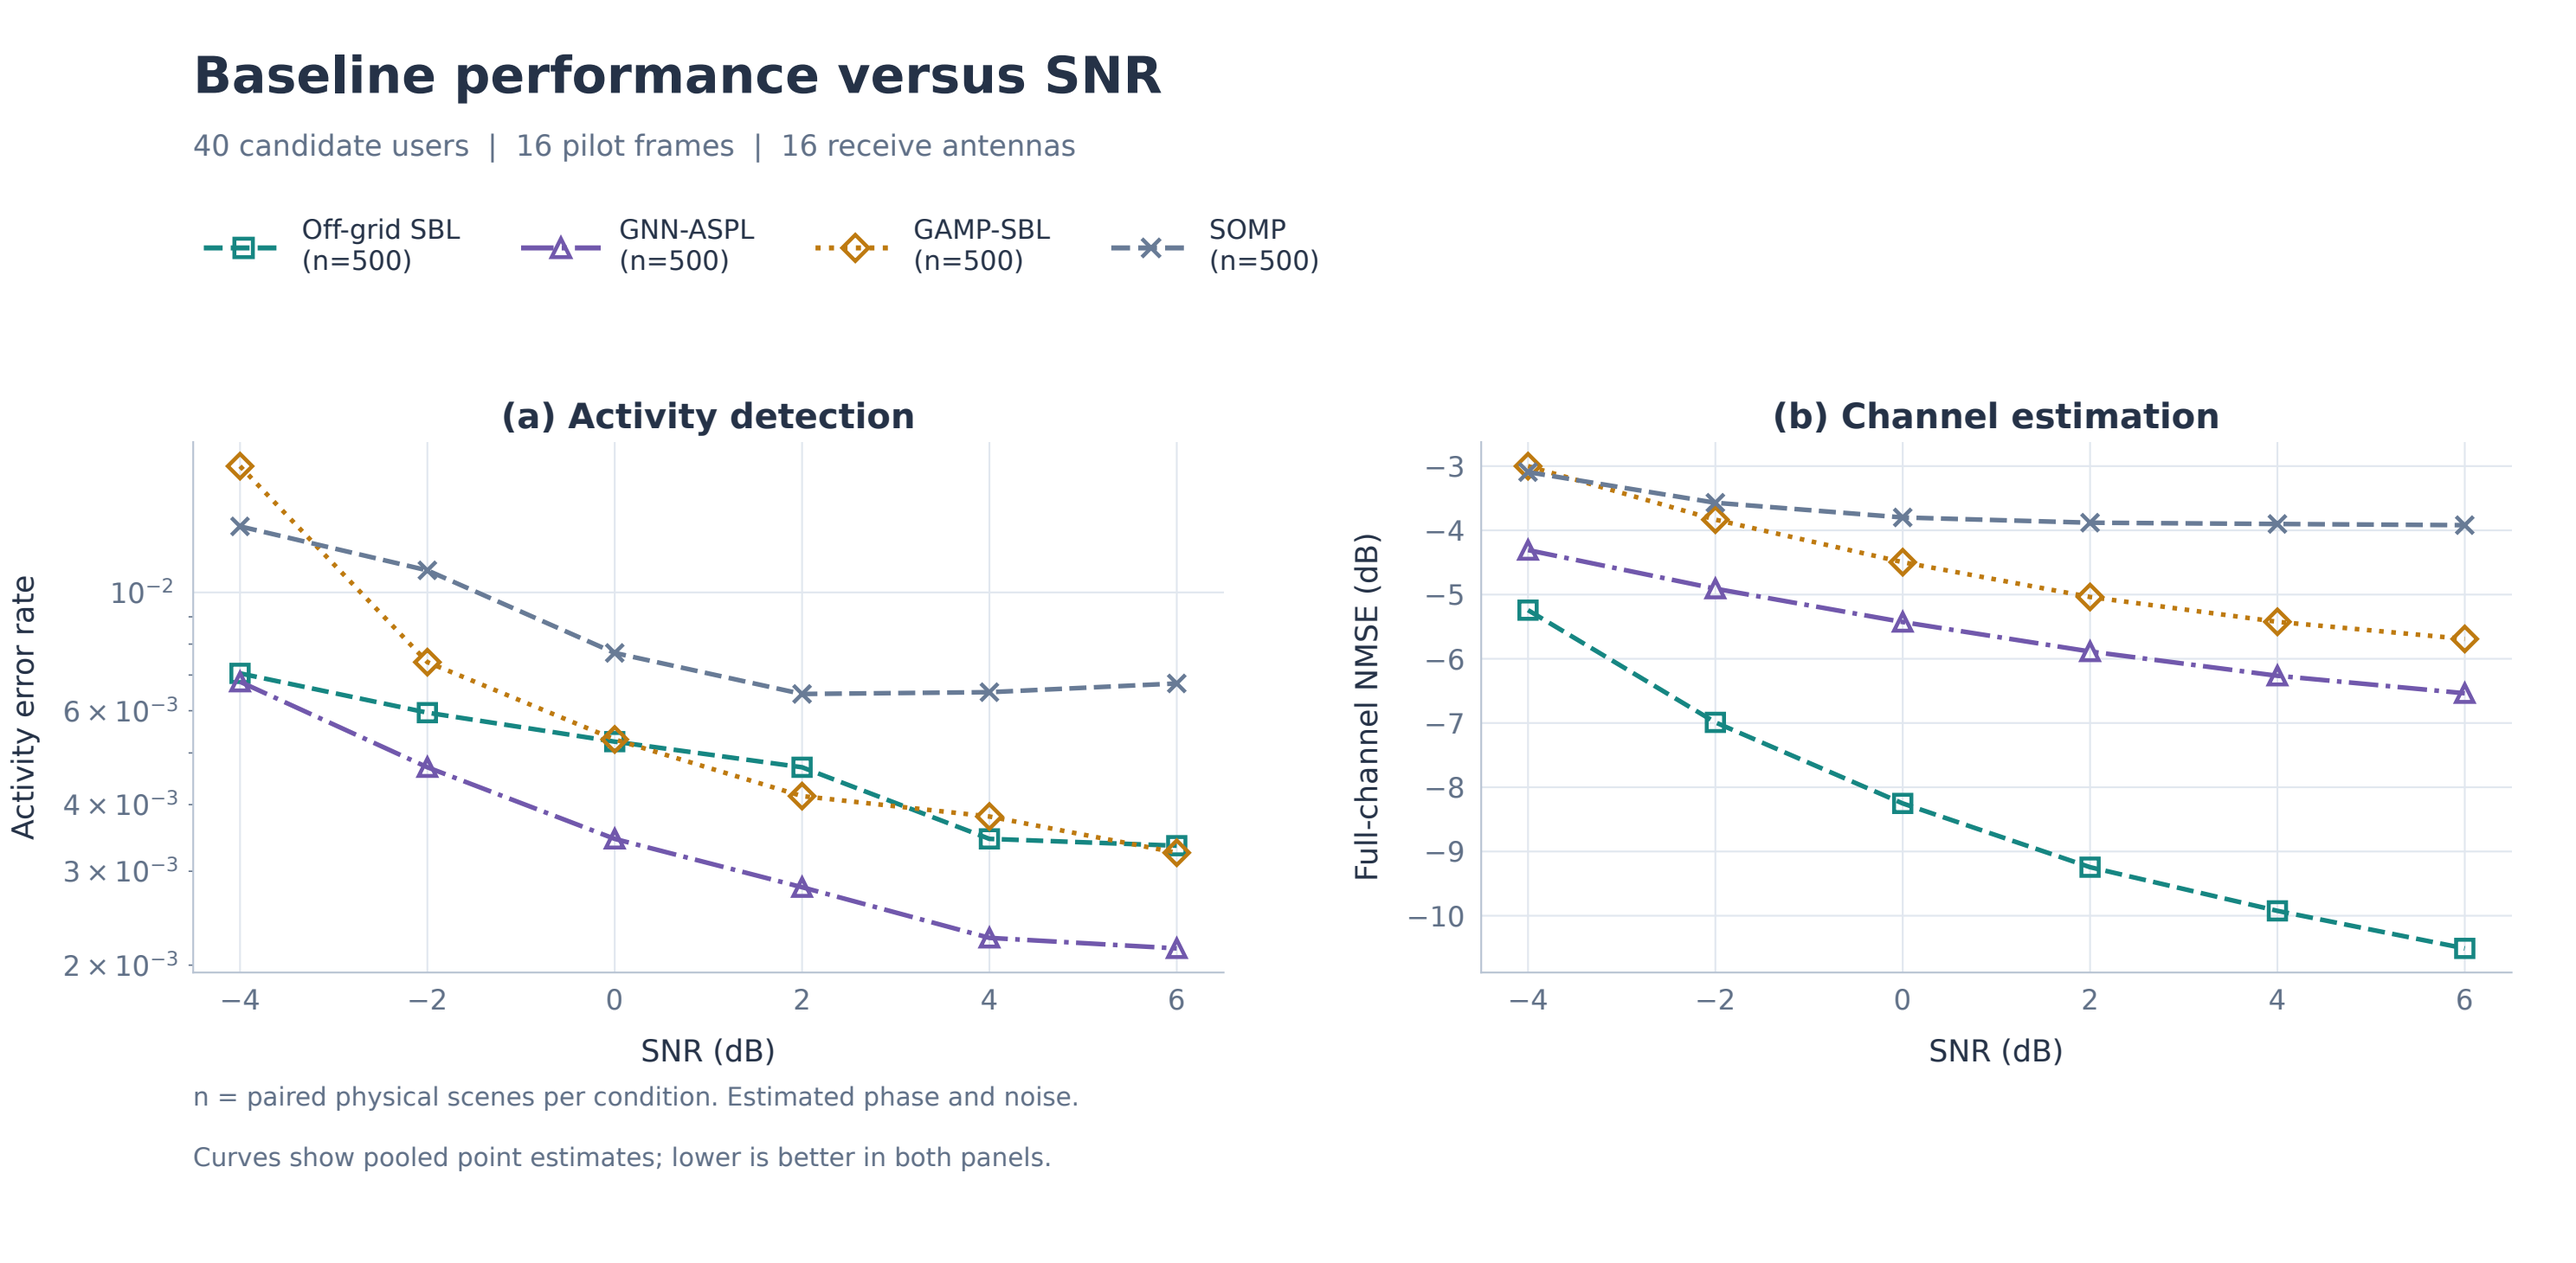

n = paired physical scenes per condition. Estimated phase and noise.

Curves show pooled point estimates; lower is better in both panels.