


RoHS Compliant: YES

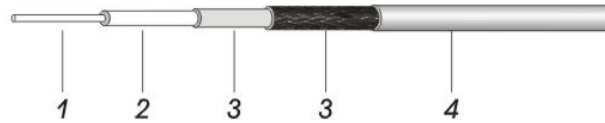

Construction and Specifications		
Description	Material	Diameter (inch)
1. Inner Conductor	Solid Bare Copper	0.037
2. Dielectric	Foam PE	0.110
3. Inner Braid	Laminate Aluminum Foil	0.116
4. Outer Braid	Tinned Copper Wire Braid	0.132
5. Jacket	Black PE	0.197

Mechanical Specifications	
Minimum Bend Radius (Dynamic)	2.0 inches
Minimum Bend Radius (Installation)	0.5 inches

Environmental Specifications	
Operating Temperature Range	-40 °C to +85 °C

Electrical Specifications	
Velocity of Propagation	80%
Impedance	50 ohms
Shielding Effectiveness:	<-90 dB

Electronic Specifications		
Frequency (MHz)	Attenuation dB/100 feet	Power Handling (Average input power in KWatts)
50	2.6	0.79
150	4.5	0.45
220	5.4	0.37
450	7.8	0.26
900	11.1	0.18
1500	14.5	0.14
1800	16.0	0.13
2000	16.9	0.12
2500	19.1	0.11
3000	21.0	0.10
6000	29.9	0.06

Notes applying to data sheet specifications:

Published specifications in this data sheet are typical performance values and are not measured on each cable lot. The published specifications are largely dependent upon cable construction and mechanical tolerances which is verified on each cable lot. This document is being provided for the purpose of reference only. evissap is a provider of finished and tested cable assemblies. evissap verifies performance by measuring and testing cable assemblies to data sheet specifications (standard product) or to mutually agreed to cable assembly performance specifications.