

PARK VISUAL RWY 03L/R


AL-227 [USAF]

NELLIS AFB (KLSV)

LAS VEGAS, NEVADA

FOR USE BY NELLIS AFB LOCALLY ASSIGNED AIRCRAFT, WIC SUPPORT, RED FLAG AND GREEN FLAG PARTICIPANTS

ATIS 270.1
NELLIS APP CON
124.95 273.55
NELLIS TOWER
132.55 327.0
GND CON
121.8 275.8

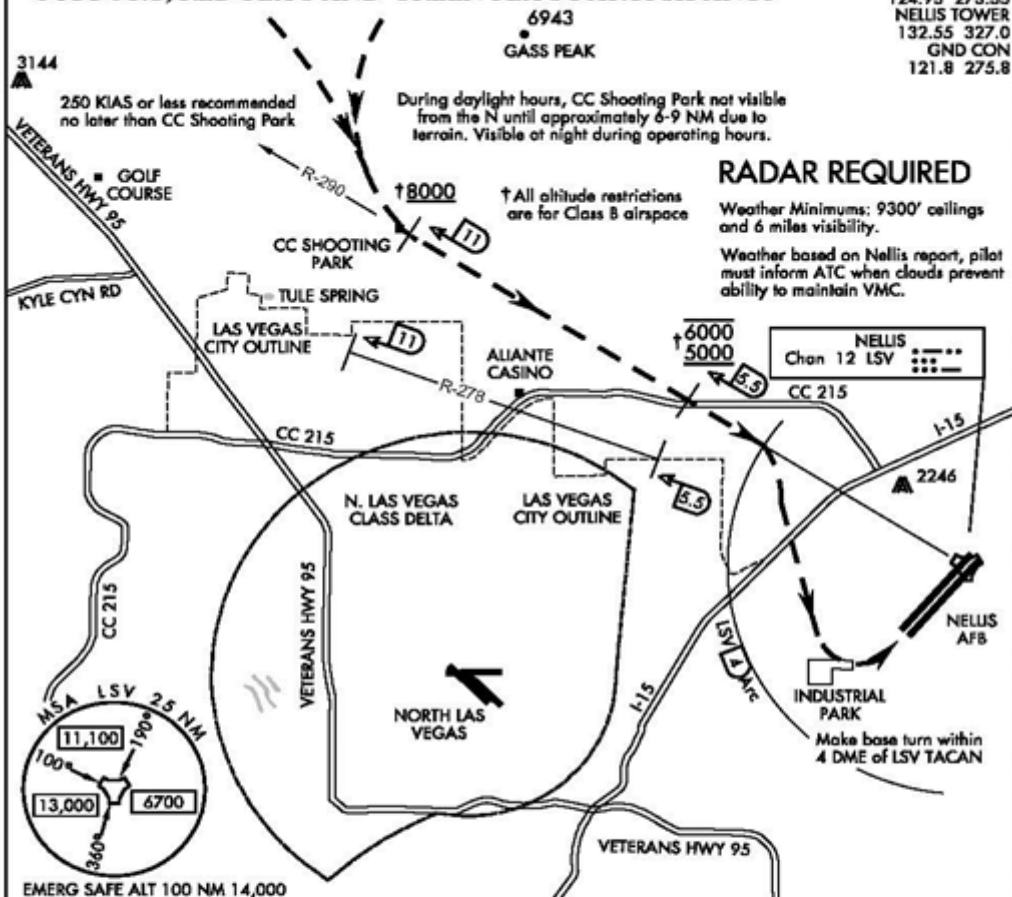

RADAR REQUIRED

Weather Minimums: 9300' ceilings
and 6 miles visibility.

Weather based on Nellis report, pilot
must inform ATC when clouds prevent
ability to maintain VMC.

PARK VISUAL RWY 03L/R

Expect RADAR vectors to Shooting Park (SP) (LSV TACAN R-290/11 DME).

Report SP in sight (ATC clearance - "Cleared Park Visual Rwy 03 Approach")

Cross SP at or above 8000, proceed inbound via LSV R-290 remaining N of Las Vegas City Outline.

When maneuvering to LSV R-290/11 DME, remain N of LSV R-278 between 11 and 5.5 DME to protect against N Las Vegas Class Delta airspace/traffic.

Descend to cross LSV R-290/5.5 DME between 5000 and 6000.

Nellis Tower will assign either Rwy 03 L/R.

Once inside 4 DME of LSV TACAN, make base turn to remain within 4 DME to protect against Las Vegas Approach airspace/traffic.

PARK VISUAL RWY 03L/R

36°14'N-115°02'W

LAS VEGAS, NEVADA

NELLIS AFB (KLSV)