

JAYSN Recovery authorized day/night and while operating IMC/VMC

ATC radar monitoring required

Altitudes assigned by ATC shall ensure obstacle clearance unless STRYK Recovery clearance is issued/accepted by aircrew during daytime recovery

Aircrew acceptance of STRYK Recovery automatically cancels IFR

JAYSN Recovery authorized day/night and while operating IMC/VMC

ATC radar monitoring required

Altitudes assigned by ATC shall ensure obstacle clearance unless STRYK Recovery clearance is issued/accepted by aircrew during daytime recovery

Aircrew acceptance of STRYK Recovery automatically cancels IFR

JAYSN Recovery authorized day/night and while operating IMC/VMC

ATC radar monitoring required

Altitudes assigned by ATC shall ensure obstacle clearance unless STRYK Recovery clearance is issued/accepted by aircrew during daytime recovery


Aircrew acceptance of STRYK Recovery automatically cancels IFR

JAYSN Recovery authorized day/night and while operating IMC/VMC

ATC radar monitoring required

Altitudes assigned by ATC shall ensure obstacle clearance unless STRYK Recovery clearance is issued/accepted by aircrew during daytime recovery

Aircrew acceptance of STRYK Recovery automatically cancels IFR

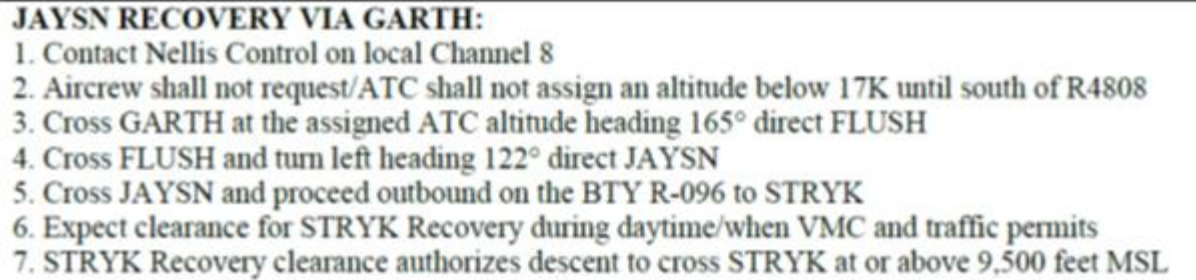

JAYSN RECOVERY FROM BEATTY:

- JAYSN RECOVERY FROM BEATTY:**
1. Contact Nellis Control on local Channel 8
 2. Cross BTY at the assigned ATC altitude; proceed outbound on the BTY R-096 direct JAYSN
 3. Cross JAYSN and continue outbound on the BTY R-096 to STRYK
 4. Expect clearance for STRYK Recovery during daytime/when VMC and traffic permits
 5. STRYK Recovery clearance authorizes descent to cross STRYK at or above 9,500 feet MSL

2. Cross BTY at the assigned ATC altitude:

4. Expect clearance for STRYK Recovery during daytime/when VMC and traffic permits
5. STRYK Recovery clearance authorizes descent to cross STRYK at or above 9,500 feet MSL