RIT VEXU Software Engineering Notebook

2023-2024

Uh Software or something idk

RIT VEXU Core API

Chapter 1

Core

This is the host repository for the custom VEX libraries used by the RIT VEXU team

Automatically updated documentation is available at `here`. There is also a downloadable `reference manual`.

1.1 Getting Started

In order to simply use this repo, you can either clone it into your VEXcode project folder, or download the .zip and place it into a core/ subfolder. Then follow the instructions for setting up compilation at `Wiki/BuildSystem`

If you wish to contribute, follow the instructions at `Wiki/ProjectSetup`

1.2 Features

Here is the current feature list this repo provides:

Subsystems (See `Wiki/Subsystems`):

- Tank drivetrain (user control / autonomous)
- Mecanum drivetrain (user control / autonomous)
- Odometry
- Flywheel
- Lift
- Custom encoders

Utilities (See `Wiki/Utilites`):

- PID controller
- FeedForward controller
- Trapezoidal motion profile controller
- Pure Pursuit
- Generic auto program builder
- Auto program UI selector
- Mathematical classes (Vector2D, Moving Average)

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Chapter 4

File Index

4.1 File List

Here is a list of all documented files with brief descriptions:

Chapter 5

Class Documentation

5.1 Async Class Reference

Async runs a command asynchronously will simply let it go and never look back THIS HAS A VERY NICHE USE CASE. THINK ABOUT IF YOU REALLY NEED IT.

```
#include <auto_command.h>
```

Inheritance diagram for Async:

```
┌─────────────────┐
│  AutoCommand    │
└─────────────────┘
         ▲
┌─────────────────┐
│     Async       │
└─────────────────┘
```

Public Member Functions

- **Async** (AutoCommand ∗cmd)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.1.1 Detailed Description

Async runs a command asynchronously will simply let it go and never look back THIS HAS A VERY NICHE USE CASE. THINK ABOUT IF YOU REALLY NEED IT.

5.1.2 Member Function Documentation

5.1.2.1 run()

```
bool Async::run ( )    [override], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.2 AutoChooser Class Reference

```
#include <auto_chooser.h>
```

Classes

- struct entry_t

Public Member Functions

- AutoChooser (vex::brain &brain)
- void add (std::string name)
- std::string get_choice ()

Protected Member Functions

- void render (entry_t *selected)

Protected Attributes

- std::string choice
- std::vector< entry_t > list
- vex::brain & brain

5.2.1 Detailed Description

Autochooser is a utility to make selecting robot autonomous programs easier source: RIT VexU Wiki During a season, we usually code between 4 and 6 autonomous programs. Most teams will change their entire robot program as a way of choosing autonomi but this may cause issues if you have an emergency patch to upload during a competition. This class was built as a way of using the robot screen to list autonomous programs, and the touchscreen to select them.

5.2.2 Constructor & Destructor Documentation

5.2.2.1 AutoChooser()

```
AutoChooser::AutoChooser (
            vex::brain & brain )
```

Initialize the auto-chooser. This class places a choice menu on the brain screen, so the driver can choose which autonomous to run.

Parameters

brain	the brain on which to draw the selection boxes

5.2.3 Member Function Documentation

5.2.3.1 add()

```
void AutoChooser::add (
            std::string name )
```

Add an auto path to the chooser

Parameters

name	The name of the path. This should be used as an human readable identifier to the auto path

Add a new autonomous option. There are 3 options per row.

5.2.3.2 get_choice()

```
std::string AutoChooser::get_choice ( )
```

Get the currently selected auto choice

Returns

the identifier to the auto path

Return the selected autonomous

5.2.3.3 render()

```
void AutoChooser::render (
                entry_t * selected ) [protected]
```

Place all the autonomous choices on the screen. If one is selected, change it's color

Parameters

selected	the choice that is currently selected

5.2.4 Member Data Documentation

5.2.4.1 brain

```
vex::brain& AutoChooser::brain  [protected]
```

the brain to show the choices on

5.2.4.2 choice

```
std::string AutoChooser::choice  [protected]
```

the current choice of auto

5.2.4.3 list

```
std::vector<entry_t> AutoChooser::list  [protected]
```

< a list of all possible auto choices

The documentation for this class was generated from the following files:

- include/utils/auto_chooser.h
- src/utils/auto_chooser.cpp

5.3 AutoCommand Class Reference

`#include <auto_command.h>`

Inheritance diagram for AutoCommand:
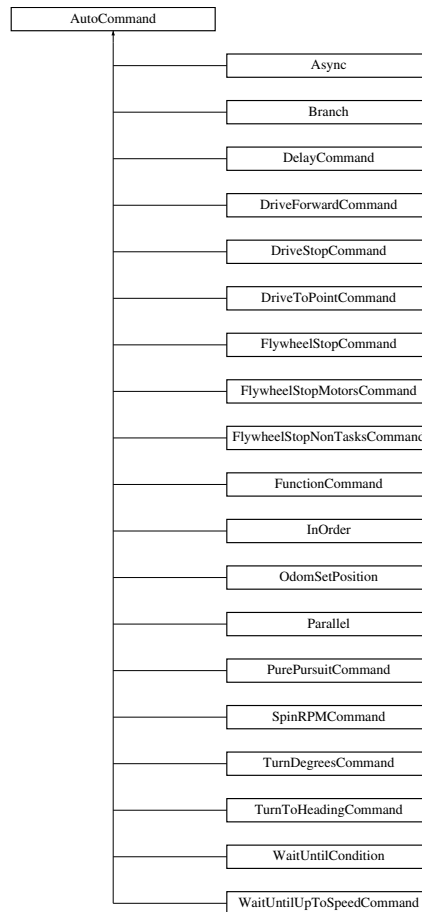
Public Member Functions

- virtual bool run ()
- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Public Attributes

- double timeout_seconds = default_timeout

Static Public Attributes

- static constexpr double **default_timeout** = 10.0

5.3.1 Detailed Description

File: auto_command.h Desc: Interface for module-specifc commands

5.3.2 Member Function Documentation

5.3.2.1 on_timeout()

```
virtual void AutoCommand::on_timeout ( )  [inline], [virtual]
```

What to do if we timeout instead of finishing. timeout is specified by the timeout seconds in the constructor

Reimplemented in InOrder, Parallel, Branch, DriveForwardCommand, TurnDegreesCommand, TurnToHeadingCommand, PurePursuitCommand, and DriveStopCommand.

5.3.2.2 run()

```
virtual bool AutoCommand::run ( )  [inline], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented in FunctionCommand, WaitUntilCondition, InOrder, Parallel, Branch, Async, DelayCommand, DriveForwardCommand, TurnDegreesCommand, DriveToPointCommand, TurnToHeadingCommand, PurePursuitCommand, DriveStopCommand, OdomSetPosition, SpinRPMCommand, WaitUntilUpToSpeedCommand, FlywheelStopCommand, and FlywheelStopMotorsCommand.

5.3.3 Member Data Documentation

5.3.3.1 timeout_seconds

```
double AutoCommand::timeout_seconds = default_timeout
```

How long to run until we cancel this command. If the command is cancelled, on_timeout() is called to allow any cleanup from the function. If the timeout_seconds <= 0, no timeout will be applied and this command will run forever A timeout can come in handy for some commands that can not reach the end due to some physical limitation such as

- a drive command hitting a wall and not being able to reach its target

- a command that waits until something is up to speed that never gets up to speed because of battery voltage

- something else...

The documentation for this class was generated from the following file:

- include/utils/command_structure/auto_command.h

5.4 Branch Class Reference

Branch chooses from multiple options at runtime. the function decider returns an index into the choices vector If you wish to make no choice and skip this section, return NO_CHOICE; any choice that is out of bounds set to NO_CHOICE.

```
#include <auto_command.h>
```

Inheritance diagram for Branch:

```
┌─────────────────┐
│  AutoCommand    │
└─────────────────┘
         ▲
┌─────────────────┐
│     Branch      │
└─────────────────┘
```

Public Member Functions

- **Branch** (Condition *cond, AutoCommand *false_choice, AutoCommand *true_choice)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand * **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.4.1 Detailed Description

Branch chooses from multiple options at runtime. the function decider returns an index into the choices vector If you wish to make no choice and skip this section, return NO_CHOICE; any choice that is out of bounds set to NO_CHOICE.

5.4.2 Member Function Documentation

5.4.2.1 on_timeout()

```
void Branch::on_timeout ( )  [override], [virtual]
```

What to do if we timeout instead of finishing. timeout is specified by the timeout seconds in the constructor

Reimplemented from AutoCommand.

5.4.2.2 run()

```
bool Branch::run ( ) [override], [virtual]
```

Executes the command Overridden by child classes

Returns

> true when the command is finished, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.5 CommandController Class Reference

```
#include <command_controller.h>
```

Public Member Functions

- **CommandController** ()

    Create an empty CommandController. Add Command with CommandController::add()
- CommandController (std::initializer_list< AutoCommand ∗ > cmds)

    Create a CommandController with commands pre added. More can be added with CommandController::add()
- void add (std::vector< AutoCommand ∗ > cmds)
- void add (AutoCommand ∗cmd, double timeout_seconds=10.0)
- void add (std::vector< AutoCommand ∗ > cmds, double timeout_sec)
- void add_delay (int ms)
- void add_cancel_func (std::function< bool(void)> true_if_cancel)

    add_cancel_func specifies that when this func evaluates to true, to cancel the command controller
- void run ()
- bool last_command_timed_out ()

5.5.1 Detailed Description

File: command_controller.h Desc: A CommandController manages the AutoCommands that make up an autonomous route. The AutoCommands are kept in a queue and get executed and removed from the queue in FIFO order.

5.5.2 Constructor & Destructor Documentation

5.5.2.1 CommandController()

```
CommandController::CommandController (
            std::initializer_list< AutoCommand ∗ > cmds ) [inline]
```

Create a CommandController with commands pre added. More can be added with CommandController::add()

Parameters

cmds	

5.5.3 Member Function Documentation

5.5.3.1 add() [1/3]

```
void CommandController::add (
            AutoCommand * cmd,
            double timeout_seconds = 10.0 )
```

File: command_controller.cpp Desc: A [CommandController](#) manages the AutoCommands that make up an autonomous route. The AutoCommands are kept in a queue and get executed and removed from the queue in FIFO order. Adds a command to the queue

Parameters

cmd	the [AutoCommand](#) we want to add to our list
timeout_seconds	the number of seconds we will let the command run for. If it exceeds this, we cancel it and run on_timeout

5.5.3.2 add() [2/3]

```
void CommandController::add (
            std::vector< AutoCommand * > cmds )
```

Adds a command to the queue

Parameters

cmd	the [AutoCommand](#) we want to add to our list
timeout_seconds	the number of seconds we will let the command run for. If it exceeds this, we cancel it and run on_timeout. if it is $<= 0$ no time out will be applied

Add multiple commands to the queue. No timeout here.

Parameters

cmds	the AutoCommands we want to add to our list

5.5.3.3 add() [3/3]

```
void CommandController::add (
            std::vector< AutoCommand * > cmds,
            double timeout_sec )
```

Add multiple commands to the queue. No timeout here.

Parameters

cmds	the AutoCommands we want to add to our list Add multiple commands to the queue. No timeout here.
cmds	the AutoCommands we want to add to our list
timeout_sec	timeout in seconds to apply to all commands if they are still the default

Add multiple commands to the queue. No timeout here.

Parameters

cmds	the AutoCommands we want to add to our list
timeout	timeout in seconds to apply to all commands if they are still the default

5.5.3.4 add_cancel_func()

```
void CommandController::add_cancel_func (
            std::function< bool(void)> true_if_cancel )
```

add_cancel_func specifies that when this func evaluates to true, to cancel the command controller

Parameters

true_if_cancel	a function that returns true when we want to cancel the command controller

5.5.3.5 add_delay()

```
void CommandController::add_delay (
            int ms )
```

Adds a command that will delay progression of the queue

Parameters

ms	- number of milliseconds to wait before continuing execution of autonomous

5.5.3.6 last_command_timed_out()

```
bool CommandController::last_command_timed_out ( )
```

last_command_timed_out tells how the last command ended Use this if you want to make decisions based on the end of the last command

Returns

> true if the last command timed out. false if it finished regularly

5.5.3.7 run()

```
void CommandController::run ( )
```

Begin execution of the queue Execute and remove commands in FIFO order

The documentation for this class was generated from the following files:

- include/utils/command_structure/command_controller.h
- src/utils/command_structure/command_controller.cpp

5.6 Condition Class Reference

```
#include <auto_command.h>
```

Inheritance diagram for Condition:

Public Member Functions

- virtual bool **test** ()=0

5.6.1 Detailed Description

A Condition is a function that returns true or false is_even is a predicate that would return true if a number is even For our purposes, a Condition is a choice to be made at runtime drive_sys.reached_point(10, 30) is a predicate time.has_elapsed(10, vex::seconds) is a predicate extend this class for different choices you wish to make

The documentation for this class was generated from the following file:

- include/utils/command_structure/auto_command.h

5.7 CustomEncoder Class Reference

```
#include <custom_encoder.h>
```

Inheritance diagram for CustomEncoder:

Public Member Functions

- CustomEncoder (vex::triport::port &port, double ticks_per_rev)
- void setRotation (double val, vex::rotationUnits units)
- void setPosition (double val, vex::rotationUnits units)
- double rotation (vex::rotationUnits units)
- double position (vex::rotationUnits units)
- double velocity (vex::velocityUnits units)

5.7.1 Detailed Description

A wrapper class for the vex encoder that allows the use of 3rd party encoders with different tick-per-revolution values.

5.7.2 Constructor & Destructor Documentation

5.7.2.1 CustomEncoder()

```
CustomEncoder::CustomEncoder (
            vex::triport::port & port,
            double ticks_per_rev )
```

Construct an encoder with a custom number of ticks

Parameters

port	the triport port on the brain the encoder is plugged into
ticks_per_rev	the number of ticks the encoder will report for one revolution

5.7.3 Member Function Documentation

5.7.3.1 position()

```
double CustomEncoder::position (
            vex::rotationUnits units )
```

get the position that the encoder is at

Parameters

units	the unit we want the return value to be in

Returns

the position of the encoder in the units specified

5.7.3.2 rotation()

```
double CustomEncoder::rotation (
            vex::rotationUnits units )
```

get the rotation that the encoder is at

Parameters

units	the unit we want the return value to be in

Returns

> the rotation of the encoder in the units specified

5.7.3.3 setPosition()

```
void CustomEncoder::setPosition (
            double val,
            vex::rotationUnits units )
```

sets the stored position of the encoder. Any further movements will be from this value

Parameters

val	the numerical value of the position we are setting to
units	the unit of val

5.7.3.4 setRotation()

```
void CustomEncoder::setRotation (
            double val,
            vex::rotationUnits units )
```

sets the stored rotation of the encoder. Any further movements will be from this value

Parameters

val	the numerical value of the angle we are setting to
units	the unit of val

5.7.3.5 velocity()

```
double CustomEncoder::velocity (
            vex::velocityUnits units )
```

get the velocity that the encoder is moving at

Parameters

units	the unit we want the return value to be in

Returns

the velocity of the encoder in the units specified

The documentation for this class was generated from the following files:

- include/subsystems/custom_encoder.h
- src/subsystems/custom_encoder.cpp

5.8   DelayCommand Class Reference

```
#include <delay_command.h>
```

Inheritance diagram for DelayCommand:

```
AutoCommand
     ↑
DelayCommand
```

Public Member Functions

- DelayCommand (int ms)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.8.1 Detailed Description

File: delay_command.h Desc: A DelayCommand will make the robot wait the set amount of milliseconds before continuing execution of the autonomous route

5.8.2 Constructor & Destructor Documentation

5.8.2.1 DelayCommand()

```
DelayCommand::DelayCommand (
            int ms )  [inline]
```

Construct a delay command

Parameters

ms	the number of milliseconds to delay for

5.8.3 Member Function Documentation

5.8.3.1 run()

```
bool DelayCommand::run ( )  [inline], [override], [virtual]
```

Delays for the amount of milliseconds stored in the command Overrides run from AutoCommand

Returns

true when complete

Reimplemented from AutoCommand.

The documentation for this class was generated from the following file:

- include/utils/command_structure/delay_command.h

5.9 DriveForwardCommand Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for DriveForwardCommand:

Public Member Functions

- DriveForwardCommand (TankDrive &drive_sys, Feedback &feedback, double inches, directionType dir, double max_speed=1)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.9.1 Detailed Description

AutoCommand wrapper class for the drive_forward function in the TankDrive class

5.9.2 Constructor & Destructor Documentation

5.9.2.1 DriveForwardCommand()

```
DriveForwardCommand::DriveForwardCommand (
          TankDrive & drive_sys,
          Feedback & feedback,
          double inches,
          directionType dir,
          double max_speed = 1 )
```

File: drive_commands.h Desc: Holds all the AutoCommand subclasses that wrap (currently) TankDrive functions

Currently includes:

- drive_forward

- turn_degrees

- drive_to_point

- turn_to_heading

- stop

Also holds AutoCommand subclasses that wrap OdometryBase functions

Currently includes:

- set_position Construct a DriveForward Command

Parameters

drive_sys	the drive system we are commanding
feedback	the feedback controller we are using to execute the drive
inches	how far forward to drive
dir	the direction to drive
max_speed	0 -> 1 percentage of the drive systems speed to drive at

5.9.3 Member Function Documentation

5.9.3.1 on_timeout()

```
void DriveForwardCommand::on_timeout ( )  [override], [virtual]
```

Cleans up drive system if we time out before finishing

reset the drive system if we timeout

Reimplemented from AutoCommand.

5.9.3.2 run()

```
bool DriveForwardCommand::run ( )  [override], [virtual]
```

Run drive_forward Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.10 DriveStopCommand Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for DriveStopCommand:

Public Member Functions

- DriveStopCommand (TankDrive &drive_sys)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.10.1 Detailed Description

AutoCommand wrapper class for the stop() function in the TankDrive class

5.10.2 Constructor & Destructor Documentation

5.10.2.1 DriveStopCommand()

```
DriveStopCommand::DriveStopCommand (
            TankDrive & drive_sys )
```

Construct a DriveStop Command

Parameters

drive_sys	the drive system we are commanding

5.10.3 Member Function Documentation

5.10.3.1 on_timeout()

```
void DriveStopCommand::on_timeout ( )  [override], [virtual]
```

What to do if we timeout instead of finishing. timeout is specified by the timeout seconds in the constructor

Reimplemented from AutoCommand.

5.10.3.2 run()

```
bool DriveStopCommand::run ( )  [override], [virtual]
```

Stop the drive system Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Stop the drive train Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.11 DriveToPointCommand Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for DriveToPointCommand:

```
┌─────────────────────────┐
│      AutoCommand         │
└─────────────────────────┘
             ▲
             │
┌─────────────────────────┐
│  DriveToPointCommand     │
└─────────────────────────┘
```

Public Member Functions

- DriveToPointCommand (TankDrive &drive_sys, Feedback &feedback, double x, double y, directionType dir, double max_speed=1)
- DriveToPointCommand (TankDrive &drive_sys, Feedback &feedback, point_t point, directionType dir, double max_speed=1)
- bool run () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.11.1 Detailed Description

AutoCommand wrapper class for the drive_to_point function in the TankDrive class

5.11.2 Constructor & Destructor Documentation

5.11.2.1 DriveToPointCommand() [1/2]

```
DriveToPointCommand::DriveToPointCommand (
            TankDrive & drive_sys,
            Feedback & feedback,
            double x,
            double y,
            directionType dir,
            double max_speed = 1 )
```

Construct a DriveForward Command

Parameters

drive_sys	the drive system we are commanding
feedback	the feedback controller we are using to execute the drive
x	where to drive in the x dimension
y	where to drive in the y dimension
dir	the direction to drive
max_speed	0 -> 1 percentage of the drive systems speed to drive at

5.11.2.2 DriveToPointCommand() [2/2]

```
DriveToPointCommand::DriveToPointCommand (
            TankDrive & drive_sys,
            Feedback & feedback,
            point_t point,
            directionType dir,
            double max_speed = 1 )
```

Construct a DriveForward Command

Parameters

drive_sys	the drive system we are commanding
feedback	the feedback controller we are using to execute the drive
point	the point to drive to
dir	the direction to drive
max_speed	0 -> 1 percentage of the drive systems speed to drive at

5.11.3 Member Function Documentation

5.11.3.1 run()

```
bool DriveToPointCommand::run ( )  [override], [virtual]
```

Run drive_to_point Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.12 AutoChooser::entry_t Struct Reference

```
#include <auto_chooser.h>
```

Public Attributes

- int x
- int y
- int width
- int height
- std::string name

5.12.1 Detailed Description

entry_t is a datatype used to store information that the chooser knows about an auto selection button

5.12.2 Member Data Documentation

5.12.2.1 height

`int AutoChooser::entry_t::height`

height of the block

5.12.2.2 name

`std::string AutoChooser::entry_t::name`

name of the auto repretsented by the block

5.12.2.3 width

`int AutoChooser::entry_t::width`

width of the block

5.12.2.4 x

`int AutoChooser::entry_t::x`

screen x position of the block

5.12.2.5 y

`int AutoChooser::entry_t::y`

screen y position of the block

The documentation for this struct was generated from the following file:

- include/utils/auto_chooser.h

5.13 Feedback Class Reference

`#include <feedback_base.h>`

Inheritance diagram for Feedback:

Public Types

- enum **FeedbackType** { **PIDType** , **FeedforwardType** , **OtherType** }

Public Member Functions

- virtual void init (double start_pt, double set_pt)=0
- virtual double update (double val)=0
- virtual double get ()=0
- virtual void set_limits (double lower, double upper)=0
- virtual bool is_on_target ()=0
- virtual Feedback::FeedbackType **get_type** ()

5.13.1 Detailed Description

Interface so that subsystems can easily switch between feedback loops

Author

Ryan McGee

Date

9/25/2022

5.13.2 Member Function Documentation

5.13.2.1 get()

```
virtual double Feedback::get ( )  [pure virtual]
```

Returns

the last saved result from the feedback controller

Implemented in MotionController, PID, and PIDFF.

5.13.2.2 init()

```
virtual void Feedback::init (
            double start_pt,
            double set_pt ) [pure virtual]
```

Initialize the feedback controller for a movement

Parameters

start↩ *_pt*	the current sensor value
set_pt	where the sensor value should be

Implemented in MotionController, PID, and PIDFF.

5.13.2.3 is_on_target()

```
virtual bool Feedback::is_on_target ( )  [pure virtual]
```

Returns

true if the feedback controller has reached it's setpoint

Implemented in MotionController, PID, and PIDFF.

5.13.2.4 set_limits()

```
virtual void Feedback::set_limits (
            double lower,
            double upper )  [pure virtual]
```

Clamp the upper and lower limits of the output. If both are 0, no limits should be applied.

Parameters

lower	Upper limit
upper	Lower limit

Implemented in MotionController, PID, and PIDFF.

5.13.2.5 update()

```
virtual double Feedback::update (
            double val )  [pure virtual]
```

Iterate the feedback loop once with an updated sensor value

Parameters

val	value from the sensor

Returns

feedback loop result

Implemented in MotionController, PID, and PIDFF.

The documentation for this class was generated from the following file:

- include/utils/feedback_base.h

5.14 FeedForward Class Reference

```
#include <feedforward.h>
```

Classes

- struct ff_config_t

Public Member Functions

- FeedForward (ff_config_t &cfg)
- double calculate (double v, double a, double pid_ref=0.0)
  Perform the feedforward calculation.

5.14.1 Detailed Description

FeedForward

Stores the feedfoward constants, and allows for quick computation. Feedfoward should be used in systems that require smooth precise movements and have high inertia, such as drivetrains and lifts.

This is best used alongside a PID loop, with the form: output = pid.get() + feedforward.calculate(v, a);

In this case, the feedforward does the majority of the heavy lifting, and the pid loop only corrects for inconsistencies

For information about tuning feedforward, I reccommend looking at this post: `https://www.`↩
`chiefdelphi.com/t/paper-frc-drivetrain-characterization/160915` (yes I know it's for FRC but trust me, it's useful)

Author

Ryan McGee

Date

6/13/2022

5.14.2 Constructor & Destructor Documentation

5.14.2.1 FeedForward()

```
FeedForward::FeedForward (
            ff_config_t & cfg ) [inline]
```

Creates a FeedForward object.

Parameters

cfg	Configuration Struct for tuning

5.14.3 Member Function Documentation

5.14.3.1 calculate()

```
double FeedForward::calculate (
            double v,
            double a,
            double pid_ref = 0.0 )  [inline]
```

Perform the feedforward calculation.

This calculation is the equation: F = kG + kS∗sgn(v) + kV∗v + kA∗a

Parameters

v	Requested velocity of system
a	Requested acceleration of system

Returns

A feedforward that should closely represent the system if tuned correctly

The documentation for this class was generated from the following file:

- include/utils/feedforward.h

5.15 FeedForward::ff_config_t Struct Reference

```
#include <feedforward.h>
```

Public Attributes

- double kS
- double kV
- double kA
- double kG

5.15.1 Detailed Description

ff_config_t holds the parameters to make the theoretical model of a real world system equation is of the form kS if the system is not stopped, 0 otherwise

- kV ∗ desired velocity

- kA ∗ desired acceleration

- kG

5.15.2 Member Data Documentation

5.15.2.1 kA

```
double FeedForward::ff_config_t::kA
```

kA - Acceleration coefficient: the power required to change the mechanism's speed. Multiplied by the requested acceleration.

5.15.2.2 kG

```
double FeedForward::ff_config_t::kG
```

kG - Gravity coefficient: only needed for lifts. The power required to overcome gravity and stay at steady state.

5.15.2.3 kS

```
double FeedForward::ff_config_t::kS
```

Coefficient to overcome static friction: the point at which the motor *starts* to move.

5.15.2.4 kV

```
double FeedForward::ff_config_t::kV
```

Veclocity coefficient: the power required to keep the mechanism in motion. Multiplied by the requested velocity.

The documentation for this struct was generated from the following file:

- include/utils/feedforward.h

5.16 Flywheel Class Reference

```
#include <flywheel.h>
```

Public Member Functions

- Flywheel (motor_group &motors, PID::pid_config_t &pid_config, FeedForward::ff_config_t &ff_config, const double ratio)
- Flywheel (motor_group &motors, FeedForward::ff_config_t &ff_config, const double ratio)
- Flywheel (motor_group &motors, double tbh_gain, const double ratio)
- Flywheel (motor_group &motors, const double ratio)
- double getDesiredRPM ()
- bool isTaskRunning ()
- motor_group ∗ getMotors ()
- double measureRPM ()
- double getRPM ()
- PID ∗ getPID ()
- double getPIDValue ()
- double getFeedforwardValue ()
- double getTBHGain ()
- void setPIDTarget (double value)
- void updatePID (double value)
- void spin_raw (double speed, directionType dir=fwd)
- void spin_manual (double speed, directionType dir=fwd)
- void spinRPM (int rpm)
- void stop ()
- void stopMotors ()
- void stopNonTasks ()
- AutoCommand ∗ **SpinRpmCmd** (int rpm)
- AutoCommand ∗ **WaitUntilUpToSpeedCmd** ()

5.16.1 Detailed Description

a Flywheel class that handles all control of a high inertia spinning disk It gives multiple options for what control system to use in order to control wheel velocity and functions alerting the user when the flywheel is up to speed. Flywheel is a set and forget class. Once you create it you can call spinRPM or stop on it at any time and it will take all necessary steps to accomplish this

5.16.2 Constructor & Destructor Documentation

5.16.2.1 Flywheel() [1/4]

```
Flywheel::Flywheel (
            motor_group & motors,
            PID::pid_config_t & pid_config,
            FeedForward::ff_config_t & ff_config,
            const double ratio )
```

Create the Flywheel object using PID + feedforward for control.

Parameters

motors	pointer to the motors on the fly wheel
pid_config	pointer the pid config to use
ff_config	the feedforward config to use
ratio	ratio of the whatever just multiplies the velocity

Create the Flywheel object using PID + feedforward for control.

5.16.2.2 Flywheel() **[2/4]**

```
Flywheel::Flywheel (
            motor_group & motors,
            FeedForward::ff_config_t & ff_config,
            const double ratio )
```

Create the Flywheel object using only feedforward for control

Parameters

motors	the motors on the fly wheel
ff_config	the feedforward config to use
ratio	ratio of the whatever just multiplies the velocity

Create the Flywheel object using only feedforward for control

5.16.2.3 Flywheel() **[3/4]**

```
Flywheel::Flywheel (
            motor_group & motors,
            double tbh_gain,
            const double ratio )
```

Create the Flywheel object using Take Back Half for control

Parameters

motors	the motors on the fly wheel
tbh_gain	the TBH control paramater
ratio	ratio of the whatever just multiplies the velocity

Create the Flywheel object using Take Back Half for control

5.16.2.4 Flywheel() **[4/4]**

```
Flywheel::Flywheel (
            motor_group & motors,
            const double ratio )
```

Create the Flywheel object using Bang Bang for control

Parameters

motors	the motors on the fly wheel
ratio	ratio of the whatever just multiplies the velocity

Create the Flywheel object using Bang Bang for control

5.16.3 Member Function Documentation

5.16.3.1 getDesiredRPM()

```
double Flywheel::getDesiredRPM ( )
```

Return the RPM that the flywheel is currently trying to achieve

Returns

RPM the target rpm

Return the current value that the RPM should be set to

5.16.3.2 getFeedforwardValue()

```
double Flywheel::getFeedforwardValue ( )
```

returns the current OUT value of the PID - the value that the PID would set the motors to

returns the current OUT value of the Feedforward - the value that the Feedforward would set the motors to

Returns

the voltage that feedforward wants the motors at to achieve the target RPM

5.16.3.3 getMotors()

```
motor_group * Flywheel::getMotors ( )
```

Returns a POINTER to the motors

Returns a POINTER TO the motors; not currently used.

Returns

motorPointer -pointer to the motors

5.16.3.4 getPID()

```
PID * Flywheel::getPID ( )
```

Returns a POINTER to the PID.

Returns a POINTER TO the PID; not currently used.

Returns

pidPointer -pointer to the PID

5.16.3.5 getPIDValue()

```
double Flywheel::getPIDValue ( )
```

returns the current OUT value of the [PID](#) - the value that the [PID](#) would set the motors to

returns the current OUT value of the [PID](#) - the value that the [PID](#) would set the motors to

Returns

the voltage that [PID](#) wants the motors at to achieve the target RPM

5.16.3.6 getRPM()

```
double Flywheel::getRPM ( )
```

return the current smoothed velocity of the flywheel motors, in RPM

5.16.3.7 getTBHGain()

```
double Flywheel::getTBHGain ( )
```

get the gain used for TBH control

get the gain used for TBH control

Returns

the gain used in TBH control

5.16.3.8 isTaskRunning()

```
bool Flywheel::isTaskRunning ( )
```

Checks if the background RPM controlling task is running

Returns

true if the task is running

Checks if the background RPM controlling task is running

Returns

taskRunning - If the task is running

5.16.3.9 measureRPM()

```
double Flywheel::measureRPM ( )
```

make a measurement of the current RPM of the flywheel motor and return a smoothed version

return the current velocity of the flywheel motors, in RPM

Returns

the measured velocity of the flywheel

5.16.3.10 setPIDTarget()

```
void Flywheel::setPIDTarget (
              double value )
```

Sets the value of the [PID](#) target

Parameters

value	- desired value of the PID

5.16.3.11 spin_manual()

```
void Flywheel::spin_manual (
            double speed,
            directionType dir = fwd )
```

Spin motors using voltage; defaults forward at 12 volts FOR USE BY OPCONTROL AND AUTONOMOUS - this only applies if the RPM thread is not running

Parameters

speed	- speed (between -1 and 1) to set the motor
dir	- direction that the motor moves in; defaults to forward

5.16.3.12 spin_raw()

```
void Flywheel::spin_raw (
            double speed,
            directionType dir = fwd )
```

Spin motors using voltage; defaults forward at 12 volts FOR USE BY TASKS ONLY

Parameters

speed	- speed (between -1 and 1) to set the motor
dir	- direction that the motor moves in; defaults to forward

5.16.3.13 spinRPM()

```
void Flywheel::spinRPM (
            int inputRPM )
```

starts or sets the RPM thread at new value what control scheme is dependent on control_style

Parameters

rpm	- the RPM we want to spin at

starts or sets the RPM thread at new value what control scheme is dependent on control_style

Parameters

inputRPM	- set the current RPM

5.16.3.14 stop()

```
void Flywheel::stop ( )
```

stop the RPM thread and the wheel

5.16.3.15 stopMotors()

```
void Flywheel::stopMotors ( )
```

stop only the motors; exclusively for BANG BANG use

5.16.3.16 stopNonTasks()

```
void Flywheel::stopNonTasks ( )
```

Stop the motors if the task isn't running - stop manual control

5.16.3.17 updatePID()

```
void Flywheel::updatePID (
            double value )
```

updates the value of the PID

Parameters

value	- value to update the PID with

The documentation for this class was generated from the following files:

- include/subsystems/flywheel.h
- src/subsystems/flywheel.cpp

5.17 FlywheelStopCommand Class Reference

```
#include <flywheel_commands.h>
```

Inheritance diagram for FlywheelStopCommand:
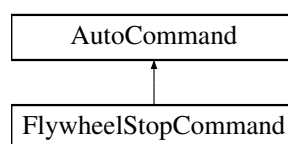
Public Member Functions

- FlywheelStopCommand (Flywheel &flywheel)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.17.1 Detailed Description

AutoCommand wrapper class for the stop function in the Flywheel class

5.17.2 Constructor & Destructor Documentation

5.17.2.1 FlywheelStopCommand()

```
FlywheelStopCommand::FlywheelStopCommand (
            Flywheel & flywheel )
```

Construct a FlywheelStopCommand

Parameters

| *flywheel* | the flywheel system we are commanding |

5.17.3 Member Function Documentation

5.17.3.1 run()

```
bool FlywheelStopCommand::run ( )  [override], [virtual]
```

Run stop Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/flywheel_commands.h
- src/utils/command_structure/flywheel_commands.cpp

5.18 FlywheelStopMotorsCommand Class Reference

`#include <flywheel_commands.h>`

Inheritance diagram for FlywheelStopMotorsCommand:

Public Member Functions

- FlywheelStopMotorsCommand (Flywheel &flywheel)
- bool run () override

Public Member Functions inherited from **AutoCommand**

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from **AutoCommand**

- double timeout_seconds = default_timeout

Static Public Attributes inherited from **AutoCommand**

- static constexpr double **default_timeout** = 10.0

5.18.1 Detailed Description

AutoCommand wrapper class for the stopMotors function in the Flywheel class

5.18.2 Constructor & Destructor Documentation

5.18.2.1 FlywheelStopMotorsCommand()

```
FlywheelStopMotorsCommand::FlywheelStopMotorsCommand (
            Flywheel & flywheel )
```

Construct a FlywheeStopMotors Command

Parameters

flywheel	the flywheel system we are commanding

5.18.3 Member Function Documentation

5.18.3.1 run()

```
bool FlywheelStopMotorsCommand::run ( )  [override], [virtual]
```

Run stop Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/flywheel_commands.h
- src/utils/command_structure/flywheel_commands.cpp

5.19 FlywheelStopNonTasksCommand Class Reference

```
#include <flywheel_commands.h>
```

Inheritance diagram for FlywheelStopNonTasksCommand:

```
          ┌─────────────────────────────┐
          │       AutoCommand           │
          └─────────────────────────────┘
                         ▲
          ┌─────────────────────────────┐
          │ FlywheelStopNonTasksCommand │
          └─────────────────────────────┘
```

Additional Inherited Members

Public Member Functions inherited from **AutoCommand**

- virtual void on_timeout ()
- AutoCommand * **withTimeout** (double t_seconds)

Public Attributes inherited from **AutoCommand**

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.19.1 Detailed Description

AutoCommand wrapper class for the stopNonTasks function in the Flywheel class

The documentation for this class was generated from the following files:

- include/utils/command_structure/flywheel_commands.h
- src/utils/command_structure/flywheel_commands.cpp

5.20 FunctionCommand Class Reference

```
#include <auto_command.h>
```

Inheritance diagram for FunctionCommand:

```
┌──────────────────┐
│  AutoCommand     │
└──────────────────┘
         ▲
┌──────────────────┐
│ FunctionCommand  │
└──────────────────┘
```

Public Member Functions

- **FunctionCommand** (std::function< bool(void)> f)
- bool run ()

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.20.1 Detailed Description

FunctionCommand is fun and good way to do simple things Printing, launching nukes, and other quick and dirty one time things

5.20.2 Member Function Documentation

5.20.2.1 run()

```
bool FunctionCommand::run ( )  [inline], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following file:

- include/utils/command_structure/auto_command.h

5.21 FunctionCondition Class Reference

FunctionCondition is a quick and dirty Condition to wrap some expression that should be evaluated at runtime.

```
#include <auto_command.h>
```

Inheritance diagram for FunctionCondition:

Public Member Functions

- **FunctionCondition** (std::function< bool()> cond, std::function< void(void)> timeout=[]() {})
- bool test () override

5.21.1 Detailed Description

FunctionCondition is a quick and dirty Condition to wrap some expression that should be evaluated at runtime.

5.21.2 Member Function Documentation

5.21.2.1 test()

```
bool FunctionCondition::test ( )  [override], [virtual]
```

Implements Condition.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.22 screen::FunctionPage Class Reference

Simple page that stores no internal data. the draw and update functions use only global data rather than storing anything.

```
#include <screen.h>
```

Inheritance diagram for screen::FunctionPage:

Public Member Functions

- FunctionPage (update_func_t update_f, draw_func_t draw_t)

    FunctionPage.

- void update (bool was_pressed, int x, int y) override

    update uses the supplied update function to update this page

- void draw (vex::brain::lcd &, bool first_draw, unsigned int frame_number) override

    draw uses the supplied draw function to draw to the screen

5.22.1 Detailed Description

Simple page that stores no internal data. the draw and update functions use only global data rather than storing anything.

5.22.2 Constructor & Destructor Documentation

5.22.2.1 FunctionPage()

```
screen::FunctionPage::FunctionPage (
            update_func_t update_f,
            draw_func_t draw_f )
```

FunctionPage.

update← *_f*	drawing function
draw_f	drawing function

5.22.3 Member Function Documentation

5.22.3.1 draw()

```
void screen::FunctionPage::draw (
            vex::brain::lcd & screen,
            bool first_draw,
            unsigned int frame_number ) [override], [virtual]
```

draw uses the supplied draw function to draw to the screen

Reimplemented from screen::Page.

5.22.3.2 update()

```
void screen::FunctionPage::update (
            bool was_pressed,
            int x,
            int y ) [override], [virtual]
```

update uses the supplied update function to update this page

Reimplemented from screen::Page.

The documentation for this class was generated from the following files:

- include/subsystems/screen.h
- src/subsystems/screen.cpp

5.23 GenericAuto Class Reference

```
#include <generic_auto.h>
```

Public Member Functions

- bool run (bool blocking)
- void add (state_ptr new_state)
- void add_async (state_ptr async_state)
- void add_delay (int ms)

5.23.1 Detailed Description

GenericAuto provides a pleasant interface for organizing an auto path steps of the path can be added with add() and when ready, calling run() will begin executing the path

5.23.2 Member Function Documentation

5.23.2.1 add()

```
void GenericAuto::add (
            state_ptr new_state )
```

Add a new state to the autonomous via function point of type "bool (ptr∗)()"

Parameters

new_state	the function to run

5.23.2.2 add_async()

```
void GenericAuto::add_async (
            state_ptr async_state )
```

Add a new state to the autonomous via function point of type "bool (ptr∗)()" that will run asynchronously

Parameters

async_state	the function to run

5.23.2.3 add_delay()

```
void GenericAuto::add_delay (
            int ms )
```

add_delay adds a period where the auto system will simply wait for the specified time

Parameters

ms	how long to wait in milliseconds

5.23.2.4 run()

```
bool GenericAuto::run (
            bool blocking )
```

The method that runs the autonomous. If 'blocking' is true, then this method will run through every state until it finished.

If blocking is false, then assuming every state is also non-blocking, the method will run through the current state in the list and return immediately.

Parameters

blocking	Whether or not to block the thread until all states have run

Returns

true after all states have finished.

The documentation for this class was generated from the following files:

- include/utils/generic_auto.h
- src/utils/generic_auto.cpp

5.24 GraphDrawer Class Reference

Public Member Functions

- GraphDrawer (vex::brain::lcd &screen, int num_samples, std::string x_label, std::string y_label, vex::color col, bool draw_border, double lower_bound, double upper_bound)

    a helper class to graph values on the brain screen
- void add_sample (point_t sample)
- void draw (int x, int y, int width, int height)

5.24.1 Constructor & Destructor Documentation

5.24.1.1 GraphDrawer()

```
GraphDrawer::GraphDrawer (
            vex::brain::lcd & screen,
            int num_samples,
            std::string x_label,
            std::string y_label,
            vex::color col,
            bool draw_border,
            double lower_bound,
            double upper_bound )
```

a helper class to graph values on the brain screen

Construct a GraphDrawer

Parameters

screen	a reference to Brain.screen we can save for later

Parameters

num_samples	the graph works on a fixed window and will plot the last `num_samples` before the history is forgotten. Larger values give more context but may slow down if you have many graphs or an exceptionally high
x_label	the name of the x axis (currently unused)
y_label	the name of the y axis (currently unused)
draw_border	whether to draw the border around the graph. can be turned off if there are multiple graphs in the same space ie. a graph of error and output
lower_bound	the bottom of the window to graph. if lower_bound == upperbound, the graph will scale to it's datapoints
upper_bound	the top of the window to graph. if lower_bound == upperbound, the graph will scale to it's datapoints

5.24.2 Member Function Documentation

5.24.2.1 add_sample()

```
void GraphDrawer::add_sample (
            point_t sample )
```

add_sample adds a point to the graph, removing one from the back

Parameters

sample	an x, y coordinate of the next point to graph

5.24.2.2 draw()

```
void GraphDrawer::draw (
            int x,
            int y,
            int width,
            int height )
```

draws the graph to the screen in the constructor

Parameters

x	x position of the top left of the graphed region
y	y position of the top left of the graphed region
width	the width of the graphed region
height	the height of the graphed region

The documentation for this class was generated from the following files:

- include/utils/graph_drawer.h
- src/utils/graph_drawer.cpp

5.25 PurePursuit::hermite_point Struct Reference

`#include <pure_pursuit.h>`

Public Member Functions

- point_t **getPoint** () const
- Vector2D **getTangent** () const

Public Attributes

- double **x**
- double **y**
- double **dir**
- double **mag**

5.25.1 Detailed Description

a position along the hermite path contains a position and orientation information that the robot would be at at this point

The documentation for this struct was generated from the following file:

- include/utils/pure_pursuit.h

5.26 IfTimePassed Class Reference

IfTimePassed tests based on time since the command controller was constructed. Returns true if elapsed time >
time_s.

`#include <auto_command.h>`

Inheritance diagram for IfTimePassed:

```
      Condition
         ▲
         |
     IfTimePassed
```

Public Member Functions

- **IfTimePassed** (double time_s)
- bool test () override

5.26.1 Detailed Description

IfTimePassed tests based on time since the command controller was constructed. Returns true if elapsed time > time_s.

5.26.2 Member Function Documentation

5.26.2.1 test()

```
bool IfTimePassed::test ( ) [override], [virtual]
```
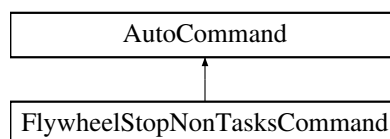
Implements Condition.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.27 InOrder Class Reference

InOrder runs its commands sequentially then continues. How to handle timeout in this case. Automatically set it to sum of commands timouts?

```
#include <auto_command.h>
```

Inheritance diagram for InOrder:

Public Member Functions

- **InOrder** (std::queue< AutoCommand * > cmds)
- **InOrder** (std::initializer_list< AutoCommand * > cmds)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand * **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.27.1 Detailed Description

InOrder runs its commands sequentially then continues. How to handle timeout in this case. Automatically set it to sum of commands timouts?

5.27.2 Member Function Documentation

5.27.2.1 on_timeout()

```
void InOrder::on_timeout ( ) [override], [virtual]
```

What to do if we timeout instead of finishing. timeout is specified by the timeout seconds in the constructor

Reimplemented from AutoCommand.

5.27.2.2 run()

```
bool InOrder::run ( ) [override], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.28 Lift$<$ **T** $>$ **Class Template Reference**

```
#include <lift.h>
```

Classes

- struct lift_cfg_t

Public Member Functions

- Lift (motor_group &lift_motors, lift_cfg_t &lift_cfg, map< T, double > &setpoint_map, limit ∗homing_↩
  switch=NULL)
- void control_continuous (bool up_ctrl, bool down_ctrl)
- void control_manual (bool up_btn, bool down_btn, int volt_up, int volt_down)
- void control_setpoints (bool up_step, bool down_step, vector< T > pos_list)
- bool set_position (T pos)
- bool set_setpoint (double val)
- double get_setpoint ()
- void hold ()
- void home ()
- bool get_async ()
- void set_async (bool val)
- void set_sensor_function (double(∗fn_ptr)(void))
- void set_sensor_reset (void(∗fn_ptr)(void))

5.28.1 Detailed Description

template<**typename T**>
class Lift< **T** >

LIFT A general class for lifts (e.g. 4bar, dr4bar, linear, etc) Uses a PID to hold the lift at a certain height under load, and to move the lift to different heights

Author

Ryan McGee

5.28.2 Constructor & Destructor Documentation

5.28.2.1 Lift()

```
template<typename T >
Lift< T >::Lift (
            motor_group & lift_motors,
            lift_cfg_t & lift_cfg,
            map< T, double > & setpoint_map,
            limit * homing_switch = NULL )  [inline]
```

Construct the Lift object and begin the background task that controls the lift.

Usage example: /code{.cpp} enum Positions {UP, MID, DOWN}; map<Positions, double> setpt_map { {DOWN, 0.0}, {MID, 0.5}, {UP, 1.0} }; Lift<Positions> my_lift(motors, lift_cfg, setpt_map); /endcode

Parameters

lift_motors	A set of motors, all set that positive rotation correlates with the lift going up
lift_cfg	Lift characterization information; PID tunings and movement speeds
setpoint_map	A map of enum type T, in which each enum entry corresponds to a different lift height

5.28.3 Member Function Documentation

5.28.3.1 control_continuous()

```
template<typename T >
void Lift< T >::control_continuous (
            bool up_ctrl,
            bool down_ctrl )  [inline]
```

Control the lift with an "up" button and a "down" button. Use PID to hold the lift when letting go.

Parameters

up_ctrl	Button controlling the "UP" motion
down_ctrl	Button controlling the "DOWN" motion

5.28.3.2 control_manual()

```
template<typename T >
void Lift< T >::control_manual (
            bool up_btn,
            bool down_btn,
            int volt_up,
            int volt_down )  [inline]
```

Control the lift with manual controls (no holding voltage)

Parameters

up_btn	Raise the lift when true
down_btn	Lower the lift when true
volt_up	Motor voltage when raising the lift
volt_down	Motor voltage when lowering the lift

5.28.3.3 control_setpoints()

```
template<typename T >
void Lift< T >::control_setpoints (
            bool up_step,
            bool down_step,
            vector< T > pos_list )  [inline]
```

Control the lift in "steps". When the "up" button is pressed, the lift will go to the next position as defined by pos_list. Order matters!

Parameters

up_step	A button that increments the position of the lift.
down_step	A button that decrements the position of the lift.
pos_list	A list of positions for the lift to go through. The higher the index, the higher the lift should be (generally).

5.28.3.4 get_async()

```
template<typename T >
bool Lift< T >::get_async ( )  [inline]
```

Returns

whether or not the background thread is running the lift

5.28.3.5 get_setpoint()

```
template<typename T >
double Lift< T >::get_setpoint ( )  [inline]
```

Returns

The current setpoint for the lift

5.28.3.6 hold()

```
template<typename T >
void Lift< T >::hold ( )  [inline]
```

Target the class's setpoint. Calculate the PID output and set the lift motors accordingly.

5.28.3.7 home()

```
template<typename T >
void Lift< T >::home ( )  [inline]
```

A blocking function that automatically homes the lift based on a sensor or hard stop, and sets the position to 0. A watchdog times out after 3 seconds, to avoid damage.

5.28.3.8 set_async()

```
template<typename T >
void Lift< T >::set_async (
            bool val )  [inline]
```

Enables or disables the background task. Note that running the control functions, or set_position functions will immediately re-enable the task for autonomous use.

Parameters

val	Whether or not the background thread should run the lift

5.28.3.9 set_position()

```
template<typename T >
bool Lift< T >::set_position (
              T pos )  [inline]
```

Enable the background task, and send the lift to a position, specified by the setpoint map from the constructor.

Parameters

pos	A lift position enum type

Returns

> True if the pid has reached the setpoint

5.28.3.10 set_sensor_function()

```
template<typename T >
void Lift< T >::set_sensor_function (
              double(*)(void) fn_ptr )  [inline]
```

Creates a custom hook for any other type of sensor to be used on the lift. Example: /code{.cpp} my_lift.set_↩
sensor_function([](){return my_sensor.position();}); /endcode

Parameters

fn_ptr	Pointer to custom sensor function

5.28.3.11 set_sensor_reset()

```
template<typename T >
void Lift< T >::set_sensor_reset (
              void(*)(void) fn_ptr )  [inline]
```

Creates a custom hook to reset the sensor used in set_sensor_function(). Example: /code{.cpp} my_lift.set_↩
sensor_reset(my_sensor.resetPosition); /endcode

5.28.3.12 set_setpoint()

```
template<typename T >
bool Lift< T >::set_setpoint (
              double val )  [inline]
```

Manually set a setpoint value for the lift PID to go to.

Parameters

val	Lift setpoint, in motor revolutions or sensor units defined by get_sensor. Cannot be outside the softstops.

Returns

True if the pid has reached the setpoint

The documentation for this class was generated from the following file:

- include/subsystems/lift.h

5.29 Lift< T >::lift_cfg_t Struct Reference

```
#include <lift.h>
```

Public Attributes

- double **up_speed**
- double **down_speed**
- double **softstop_up**
- double **softstop_down**
- PID::pid_config_t **lift_pid_cfg**

5.29.1 Detailed Description

template<**typename T**>
struct Lift< **T** >**::lift_cfg_t**

lift_cfg_t holds the physical parameter specifications of a lify system. includes:

- maximum speeds for the system

- softstops to stop the lift from hitting the hard stops too hard

The documentation for this struct was generated from the following file:

- include/subsystems/lift.h

5.30 Logger Class Reference

Class to simplify writing to files.

```
#include <logger.h>
```

Public Member Functions

- Logger (const std::string &filename)

  Create a logger that will save to a file.
- **Logger** (const Logger &l)=delete

  copying not allowed
- Logger & **operator=** (const Logger &l)=delete

  copying not allowed
- void Log (const std::string &s)

  Write a string to the log.
- void Log (LogLevel level, const std::string &s)

  Write a string to the log with a loglevel.
- void Logln (const std::string &s)

  Write a string and newline to the log.
- void Logln (LogLevel level, const std::string &s)

  Write a string and a newline to the log with a loglevel.
- void Logf (const char ∗fmt,...)

  Write a formatted string to the log.
- void Logf (LogLevel level, const char ∗fmt,...)

  Write a formatted string to the log with a loglevel.

Public Attributes

- const int **MAX_FORMAT_LEN** = 512

  maximum size for a string to be before it's written

5.30.1 Detailed Description

Class to simplify writing to files.

5.30.2 Constructor & Destructor Documentation

5.30.2.1 Logger()

```
Logger::Logger (
            const std::string & filename ) [explicit]
```

Create a logger that will save to a file.

Parameters

filename	the file to save to

5.30.3 Member Function Documentation

5.30.3.1 Log() [1/2]

```
void Logger::Log (
            const std::string & s )
```

Write a string to the log.

Parameters

s	the string to write

5.30.3.2 Log() [2/2]

```
void Logger::Log (
            LogLevel level,
            const std::string & s )
```

Write a string to the log with a loglevel.

Parameters

level	the level to write. DEBUG, NOTICE, WARNING, ERROR, CRITICAL, TIME
s	the string to write

5.30.3.3 Logf() [1/2]

```
void Logger::Logf (
            const char * fmt,
             ... )
```

Write a formatted string to the log.

Parameters

fmt	the format string (like printf)
...	the args

5.30.3.4 Logf() [2/2]

```
void Logger::Logf (
            LogLevel level,
            const char * fmt,
             ... )
```

Write a formatted string to the log with a loglevel.

Parameters

level	the level to write. DEBUG, NOTICE, WARNING, ERROR, CRITICAL, TIME
fmt	the format string (like printf)
...	the args

5.30.3.5 LogIn() **[1/2]**

```
void Logger::LogIn (
            const std::string & s )
```

Write a string and newline to the log.

Parameters

s	the string to write

5.30.3.6 LogIn() **[2/2]**

```
void Logger::LogIn (
            LogLevel level,
            const std::string & s )
```

Write a string and a newline to the log with a loglevel.

Parameters

level	the level to write. DEBUG, NOTICE, WARNING, ERROR, CRITICAL, TIME
s	the string to write

The documentation for this class was generated from the following files:

- include/utils/logger.h
- src/utils/logger.cpp

5.31 MotionController::m_profile_cfg_t Struct Reference

```
#include <motion_controller.h>
```

Public Attributes

- double **max_v**

    the maximum velocity the robot can drive

- double **accel**

    the most acceleration the robot can do

- PID::pid_config_t **pid_cfg**

    configuration parameters for the internal PID controller

- FeedForward::ff_config_t **ff_cfg**

    configuration parameters for the internal

5.31.1 Detailed Description

m_profile_config holds all data the motion controller uses to plan paths When motion pofile is given a target to drive to, max_v and accel are used to make the trapezoid profile instructing the controller how to drive pid_cfg, ff_cfg are used to find the motor outputs necessary to execute this path

The documentation for this struct was generated from the following file:

- include/utils/motion_controller.h

5.32 Mat2 Struct Reference

Public Member Functions

- point_t **operator**∗ (const point_t p) const

Static Public Member Functions

- static Mat2 **FromRotationDegrees** (double degrees)

Public Attributes

- double **X11**
- double **X12**
- double **X21**
- double **X22**

The documentation for this struct was generated from the following file:

- include/utils/geometry.h

5.33 MecanumDrive Class Reference

```
#include <mecanum_drive.h>
```

Classes

- struct mecanumdrive_config_t

Public Member Functions

- MecanumDrive (vex::motor &left_front, vex::motor &right_front, vex::motor &left_rear, vex::motor &right_rear, vex::rotation ∗lateral_wheel=NULL, vex::inertial ∗imu=NULL, mecanumdrive_config_t ∗config=NULL)
- void drive_raw (double direction_deg, double magnitude, double rotation)
- void drive (double left_y, double left_x, double right_x, int power=2)
- bool auto_drive (double inches, double direction, double speed, bool gyro_correction=true)
- bool auto_turn (double degrees, double speed, bool ignore_imu=false)

5.33.1 Detailed Description

A class representing the Mecanum drivetrain. Contains 4 motors, a possible IMU (intertial), and a possible undriven perpendicular wheel.

5.33.2 Constructor & Destructor Documentation

5.33.2.1 MecanumDrive()

```
MecanumDrive::MecanumDrive (
            vex::motor & left_front,
            vex::motor & right_front,
            vex::motor & left_rear,
            vex::motor & right_rear,
            vex::rotation * lateral_wheel = NULL,
            vex::inertial * imu = NULL,
            mecanumdrive_config_t * config = NULL )
```

Create the Mecanum drivetrain object

5.33.3 Member Function Documentation

5.33.3.1 auto_drive()

```
bool MecanumDrive::auto_drive (
            double inches,
            double direction,
            double speed,
            bool gyro_correction = true )
```

Drive the robot in a straight line automatically. If the inertial was declared in the constructor, use it to correct while driving. If the lateral wheel was declared in the constructor, use it for more accurate positioning while strafing.

Parameters

inches	How far the robot should drive, in inches
direction	What direction the robot should travel in, in degrees. 0 is forward, +/-180 is reverse, clockwise is positive.
speed	The maximum speed the robot should travel, in percent: -1.0->+1.0
gyro_correction	=true Whether or not to use the gyro to help correct while driving. Will always be false if no gyro was declared in the constructor.

Drive the robot in a straight line automatically. If the inertial was declared in the constructor, use it to correct while driving. If the lateral wheel was declared in the constructor, use it for more accurate positioning while strafing.

Parameters

inches	How far the robot should drive, in inches
direction	What direction the robot should travel in, in degrees. 0 is forward, +/-180 is reverse, clockwise is positive.

Parameters

speed	The maximum speed the robot should travel, in percent: -1.0->+1.0
gyro_correction	= true Whether or not to use the gyro to help correct while driving. Will always be false if no gyro was declared in the constructor.

Returns

Whether or not the maneuver is complete.

5.33.3.2 auto_turn()

```
bool MecanumDrive::auto_turn (
            double degrees,
            double speed,
            bool ignore_imu = false )
```

Autonomously turn the robot X degrees over it's center point. Uses a closed loop for control.

Parameters

degrees	How many degrees to rotate the robot. Clockwise postive.
speed	What percentage to run the motors at: 0.0 -> 1.0
ignore_imu	=false Whether or not to use the Inertial for determining angle. Will instead use circumference formula + robot's wheelbase + encoders to determine.

Returns

whether or not the robot has finished the maneuver

Autonomously turn the robot X degrees over it's center point. Uses a closed loop for control.

Parameters

degrees	How many degrees to rotate the robot. Clockwise postive.
speed	What percentage to run the motors at: 0.0 -> 1.0
ignore_imu	= false Whether or not to use the Inertial for determining angle. Will instead use circumference formula + robot's wheelbase + encoders to determine.

Returns

whether or not the robot has finished the maneuver

5.33.3.3 drive()

```
void MecanumDrive::drive (
            double left_y,
```

```
        double left_x,
        double right_x,
        int power = 2 )
```

Drive the robot with a mecanum-style / arcade drive. Inputs are in percent (-100.0 -> 100.0) straight from the controller. Controls are mixed, so the robot can drive forward / strafe / rotate all at the same time.

Parameters

left_y	left joystick, Y axis (forward / backwards)
left_x	left joystick, X axis (strafe left / right)
right⤷_x	right joystick, X axis (rotation left / right)
power	=2 how much of a "curve" there should be on drive controls; better for low speed maneuvers. Leave blank for a default curve of 2 (higher means more fidelity)

Drive the robot with a mecanum-style / arcade drive. Inputs are in percent (-100.0 -> 100.0) straight from the controller. Controls are mixed, so the robot can drive forward / strafe / rotate all at the same time.

Parameters

left_y	left joystick, Y axis (forward / backwards)
left_x	left joystick, X axis (strafe left / right)
right⤷_x	right joystick, X axis (rotation left / right)
power	= 2 how much of a "curve" there should be on drive controls; better for low speed maneuvers. Leave blank for a default curve of 2 (higher means more fidelity)

5.33.3.4 drive_raw()

```
void MecanumDrive::drive_raw (
        double direction_deg,
        double magnitude,
        double rotation )
```

Drive the robot using vectors. This handles all the math required for mecanum control.

Parameters

direction_deg	the direction to drive the robot, in degrees. 0 is forward, 180 is back, clockwise is positive, counterclockwise is negative.
magnitude	How fast the robot should drive, in percent: 0.0->1.0
rotation	How fast the robot should rotate, in percent: -1.0->+1.0

The documentation for this class was generated from the following files:

- include/subsystems/mecanum_drive.h
- src/subsystems/mecanum_drive.cpp

5.34 MecanumDrive::mecanumdrive_config_t Struct Reference

```
#include <mecanum_drive.h>
```

Public Attributes

- PID::pid_config_t **drive_pid_conf**
- PID::pid_config_t **drive_gyro_pid_conf**
- PID::pid_config_t **turn_pid_conf**
- double **drive_wheel_diam**
- double **lateral_wheel_diam**
- double **wheelbase_width**

5.34.1 Detailed Description

Configure the Mecanum drive PID tunings and robot configurations

The documentation for this struct was generated from the following file:

- include/subsystems/mecanum_drive.h

5.35 motion_t Struct Reference

```
#include <trapezoid_profile.h>
```

Public Attributes

- double **pos**

  1d position at this point in time
- double **vel**

  1d velocity at this point in time
- double **accel**

  1d acceleration at this point in time

5.35.1 Detailed Description

motion_t is a description of 1 dimensional motion at a point in time.

The documentation for this struct was generated from the following file:

- include/utils/trapezoid_profile.h

5.36 MotionController Class Reference

```
#include <motion_controller.h>
```

Inheritance diagram for MotionController:

```
┌──────────────────────┐
│       Feedback        │
└──────────────────────┘
            ▲
            │
┌──────────────────────┐
│    MotionController    │
└──────────────────────┘
```

Classes

- struct m_profile_cfg_t

Public Member Functions

- MotionController (m_profile_cfg_t &config)

    Construct a new Motion Controller object.
- void init (double start_pt, double end_pt) override

    Initialize the motion profile for a new movement This will also reset the PID and profile timers.
- double update (double sensor_val) override

    Update the motion profile with a new sensor value.
- double get () override
- void set_limits (double lower, double upper) override
- bool is_on_target () override
- motion_t get_motion ()

Public Member Functions inherited from **Feedback**

- virtual Feedback::FeedbackType **get_type** ()

Static Public Member Functions

- static FeedForward::ff_config_t tune_feedforward (TankDrive &drive, OdometryTank &odometry, double pct=0.6, double duration=2)

Additional Inherited Members

Public Types inherited from **Feedback**

- enum **FeedbackType** { **PIDType** , **FeedforwardType** , **OtherType** }

5.36.1 Detailed Description

Motion Controller class

This class defines a top-level motion profile, which can act as an intermediate between a subsystem class and the motors themselves

This takes the constants kS, kV, kA, kP, kI, kD, max_v and acceleration and wraps around a feedforward, PID and trapezoid profile. It does so with the following formula:

out = feedfoward.calculate(motion_profile.get(time_s)) + pid.get(motion_profile.get(time_s))

For PID and Feedforward specific formulae, see pid.h, feedforward.h, and trapezoid_profile.h

Author

Ryan McGee

Date

7/13/2022

5.36.2 Constructor & Destructor Documentation

5.36.2.1 MotionController()

```
MotionController::MotionController (
            m_profile_cfg_t & config )
```

Construct a new Motion Controller object.

Parameters

config	The definition of how the robot is able to move max_v Maximum velocity the movement is capable of accel Acceleration / deceleration of the movement pid_cfg Definitions of kP, kI, and kD ff_cfg Definitions of kS, kV, and kA

5.36.3 Member Function Documentation

5.36.3.1 get()

```
double MotionController::get ( )  [override], [virtual]
```

Returns

the last saved result from the feedback controller

Implements Feedback.

5.36.3.2 get_motion()

`motion_t MotionController::get_motion ( )`

Returns

> The current postion, velocity and acceleration setpoints

5.36.3.3 init()

```
void MotionController::init (
            double start_pt,
            double end_pt ) [override], [virtual]
```

Initialize the motion profile for a new movement This will also reset the PID and profile timers.

Parameters

start↩_pt	Movement starting position
end_pt	Movement ending posiiton

Implements Feedback.

5.36.3.4 is_on_target()

`bool MotionController::is_on_target ( ) [override], [virtual]`

Returns

> Whether or not the movement has finished, and the PID confirms it is on target

Implements Feedback.

5.36.3.5 set_limits()

```
void MotionController::set_limits (
            double lower,
            double upper ) [override], [virtual]
```

Clamp the upper and lower limits of the output. If both are 0, no limits should be applied. if limits are applied, the controller will not target any value below lower or above upper

Parameters

lower	upper limit
upper	lower limiet

Clamp the upper and lower limits of the output. If both are 0, no limits should be applied.

Parameters

lower	Upper limit
upper	Lower limit

Implements Feedback.

5.36.3.6 tune_feedforward()

```
FeedForward::ff_config_t MotionController::tune_feedforward (
            TankDrive & drive,
            OdometryTank & odometry,
            double pct = 0.6,
            double duration = 2 )  [static]
```

This method attempts to characterize the robot's drivetrain and automatically tune the feedforward. It does this by first calculating the kS (voltage to overcome static friction) by slowly increasing the voltage until it moves.

Next is kV (voltage to sustain a certain velocity), where the robot will record it's steady-state velocity at 'pct' speed.

Finally, kA (voltage needed to accelerate by a certain rate), where the robot will record the entire movement's velocity and acceleration, record a plot of [X=(pct-kV$*$V-kS), Y=(Acceleration)] along the movement, and since kA$*$Accel = pct-kV$*$V-kS, the reciprocal of the linear regression is the kA value.

Parameters

drive	The tankdrive to operate on
odometry	The robot's odometry subsystem
pct	Maximum velocity in percent (0-$>$1.0)
duration	Amount of time the robot should be moving for the test

Returns

A tuned feedforward object

5.36.3.7 update()

```
double MotionController::update (
            double sensor_val )  [override], [virtual]
```

Update the motion profile with a new sensor value.

Parameters

sensor_val	Value from the sensor

Returns

the motor input generated from the motion profile

Implements Feedback.

The documentation for this class was generated from the following files:

- include/utils/motion_controller.h
- src/utils/motion_controller.cpp

5.37 MovingAverage Class Reference

```
#include <moving_average.h>
```

Public Member Functions

- MovingAverage (int buffer_size)
- MovingAverage (int buffer_size, double starting_value)
- void add_entry (double n)
- double get_average ()
- int get_size ()

5.37.1 Detailed Description

MovingAverage

A moving average is a way of smoothing out noisy data. For many sensor readings, the noise is roughly symmetric around the actual value. This means that if you collect enough samples those that are too high are cancelled out by the samples that are too low leaving the real value.

The MovingAverage class provides a simple interface to do this smoothing from our noisy sensor values.

WARNING: because we need a lot of samples to get the actual value, the value given by the MovingAverage will 'lag' behind the actual value that the sensor is reading. Using a MovingAverage is thus a tradeoff between accuracy and lag time (more samples) vs. less accuracy and faster updating (less samples).

5.37.2 Constructor & Destructor Documentation

5.37.2.1 MovingAverage() [1/2]

```
MovingAverage::MovingAverage (
            int buffer_size )
```

Create a moving average calculator with 0 as the default value

Parameters

buffer_size	The size of the buffer. The number of samples that constitute a valid reading

5.37.2.2 MovingAverage() [2/2]

```
MovingAverage::MovingAverage (
            int buffer_size,
            double starting_value )
```

Create a moving average calculator with a specified default value

Parameters

buffer_size	The size of the buffer. The number of samples that constitute a valid reading
starting_value	The value that the average will be before any data is added

5.37.3 Member Function Documentation

5.37.3.1 add_entry()

```
void MovingAverage::add_entry (
            double n )
```

Add a reading to the buffer Before: [1 1 2 2 3 3] => 2 ^ After: [2 1 2 2 3 3] => 2.16 ^

Parameters

n	the sample that will be added to the moving average.

5.37.3.2 get_average()

```
double MovingAverage::get_average ( )
```

Returns the average based off of all the samples collected so far

Returns

the calculated average. sum(samples)/numsamples

How many samples the average is made from

Returns

the number of samples used to calculate this average

5.37.3.3 get_size()

```
int MovingAverage::get_size ( )
```

How many samples the average is made from

Returns

the number of samples used to calculate this average

The documentation for this class was generated from the following files:

- include/utils/moving_average.h
- src/utils/moving_average.cpp

5.38 Odometry3Wheel Class Reference

```
#include <odometry_3wheel.h>
```

Inheritance diagram for Odometry3Wheel:

Classes

- struct odometry3wheel_cfg_t

Public Member Functions

- Odometry3Wheel (CustomEncoder &lside_fwd, CustomEncoder &rside_fwd, CustomEncoder &off_axis, odometry3wheel_cfg_t &cfg, bool is_async=true)
- pose_t update () override
- void tune (vex::controller &con, TankDrive &drive)

Public Member Functions inherited from OdometryBase

- OdometryBase (bool is_async)
- pose_t get_position (void)
- virtual void set_position (const pose_t &newpos=zero_pos)
- void end_async ()
- double get_speed ()
- double get_accel ()
- double get_angular_speed_deg ()
- double get_angular_accel_deg ()

Additional Inherited Members

Static Public Member Functions inherited from OdometryBase

- static int background_task (void ∗ptr)
- static double pos_diff (pose_t start_pos, pose_t end_pos)
- static double rot_diff (pose_t pos1, pose_t pos2)
- static double smallest_angle (double start_deg, double end_deg)

Public Attributes inherited from OdometryBase

- bool **end_task** = false

    end_task is true if we instruct the odometry thread to shut down

Static Public Attributes inherited from OdometryBase

- static constexpr pose_t zero_pos = {.x=0.0L, .y=0.0L, .rot=90.0L}

Protected Attributes inherited from OdometryBase

- vex::task ∗ handle
- vex::mutex mut
- pose_t current_pos
- double speed
- double accel
- double ang_speed_deg
- double ang_accel_deg

5.38.1 Detailed Description

Odometry3Wheel

This class handles the code for a standard 3-pod odometry setup, where there are 3 "pods" made up of undriven (dead) wheels connected to encoders in the following configuration:

+Y ------------— ^ | | | | | | | | || O || | | | | | | | === | | ------------— | +---------------—> + X

Where O is the center of rotation. The robot will monitor the changes in rotation of these wheels and calculate the robot's X, Y and rotation on the field.

This is a "set and forget" class, meaning once the object is created, the robot will immediately begin tracking it's movement in the background.

Author

Ryan McGee

Date

Oct 31 2022

5.38.2 Constructor & Destructor Documentation

5.38.2.1 Odometry3Wheel()

```
Odometry3Wheel::Odometry3Wheel (
            CustomEncoder & lside_fwd,
            CustomEncoder & rside_fwd,
            CustomEncoder & off_axis,
            odometry3wheel_cfg_t & cfg,
            bool is_async = true )
```

Construct a new Odometry 3 Wheel object

Parameters

lside_fwd	left-side encoder reference
rside_fwd	right-side encoder reference
off_axis	off-axis (perpendicular) encoder reference
cfg	robot odometry configuration
is_async	true to constantly run in the background

5.38.3 Member Function Documentation

5.38.3.1 tune()

```
void Odometry3Wheel::tune (
            vex::controller & con,
            TankDrive & drive )
```

A guided tuning process to automatically find tuning parameters. This method is blocking, and returns when tuning has finished. Follow the instructions on the controller to complete the tuning process

Parameters

con	Controller reference, for screen and button control
drive	Drivetrain reference for robot control

A guided tuning process to automatically find tuning parameters. This method is blocking, and returns when tuning has finished. Follow the instructions on the controller to complete the tuning process

It is assumed the gear ratio and encoder PPR have been set correctly

5.38.3.2 update()

```
pose_t Odometry3Wheel::update ( )  [override], [virtual]
```

Update the current position of the robot once, using the current state of the encoders and the previous known location

Returns

the robot's updated position

Implements OdometryBase.

The documentation for this class was generated from the following files:

- include/subsystems/odometry/odometry_3wheel.h
- src/subsystems/odometry/odometry_3wheel.cpp

5.39 Odometry3Wheel::odometry3wheel_cfg_t Struct Reference

```
#include <odometry_3wheel.h>
```

Public Attributes

- double wheelbase_dist
- double off_axis_center_dist
- double wheel_diam

5.39.1 Detailed Description

odometry3wheel_cfg_t holds all the specifications for how to calculate position with 3 encoders See the core wiki for what exactly each of these parameters measures

5.39.2 Member Data Documentation

5.39.2.1 off_axis_center_dist

```
double Odometry3Wheel::odometry3wheel_cfg_t::off_axis_center_dist
```

distance from the center of the robot to the center off axis wheel

5.39.2.2 wheel_diam

```
double Odometry3Wheel::odometry3wheel_cfg_t::wheel_diam
```

the diameter of the tracking wheel

5.39.2.3 wheelbase_dist

```
double Odometry3Wheel::odometry3wheel_cfg_t::wheelbase_dist
```

distance from the center of the left wheel to the center of the right wheel

The documentation for this struct was generated from the following file:

- include/subsystems/odometry/odometry_3wheel.h

5.40 OdometryBase Class Reference

`#include <odometry_base.h>`

Inheritance diagram for OdometryBase:

Public Member Functions

- OdometryBase (bool is_async)
- pose_t get_position (void)
- virtual void set_position (const pose_t &newpos=zero_pos)
- virtual pose_t update ()=0
- void end_async ()
- double get_speed ()
- double get_accel ()
- double get_angular_speed_deg ()
- double get_angular_accel_deg ()

Static Public Member Functions

- static int background_task (void ∗ptr)
- static double pos_diff (pose_t start_pos, pose_t end_pos)
- static double rot_diff (pose_t pos1, pose_t pos2)
- static double smallest_angle (double start_deg, double end_deg)

Public Attributes

- bool **end_task** = false

    end_task is true if we instruct the odometry thread to shut down

Static Public Attributes

- static constexpr pose_t zero_pos = {.x=0.0L, .y=0.0L, .rot=90.0L}

Protected Attributes

- vex::task ∗ handle
- vex::mutex mut
- pose_t current_pos
- double speed
- double accel
- double ang_speed_deg
- double ang_accel_deg

5.40.1 Detailed Description

[OdometryBase](#)

This base class contains all the shared code between different implementations of odometry. It handles the asynchronous management, position input/output and basic math functions, and holds positional types specific to field orientation.

All future odometry implementations should extend this file and redefine [update()](#) function.

Author

    Ryan McGee

Date

    Aug 11 2021

5.40.2 Constructor & Destructor Documentation

5.40.2.1 OdometryBase()

```
OdometryBase::OdometryBase (
            bool is_async )
```

Construct a new Odometry Base object

Parameters

is_async	True to run constantly in the background, false to call [update()](#) manually

5.40.3 Member Function Documentation

5.40.3.1 background_task()

```
int OdometryBase::background_task (
            void * ptr ) [static]
```

Function that runs in the background task. This function pointer is passed to the vex::task constructor.

Parameters

ptr	Pointer to [OdometryBase](#) object

Returns

    Required integer return code. Unused.

5.40.3.2 end_async()

```
void OdometryBase::end_async ( )
```

End the background task. Cannot be restarted. If the user wants to end the thread but keep the data up to date, they must run the update() function manually from then on.

5.40.3.3 get_accel()

```
double OdometryBase::get_accel ( )
```

Get the current acceleration

Returns

the acceleration rate of the robot (inch/s^2)

5.40.3.4 get_angular_accel_deg()

```
double OdometryBase::get_angular_accel_deg ( )
```

Get the current angular acceleration in degrees

Returns

the angular acceleration at which we are turning (deg/s^2)

5.40.3.5 get_angular_speed_deg()

```
double OdometryBase::get_angular_speed_deg ( )
```

Get the current angular speed in degrees

Returns

the angular velocity at which we are turning (deg/s)

5.40.3.6 get_position()

```
pose_t OdometryBase::get_position (
            void  )
```

Gets the current position and rotation

Returns

the position that the odometry believes the robot is at

Gets the current position and rotation

5.40.3.7 get_speed()

```
double OdometryBase::get_speed ( )
```

Get the current speed

Returns

the speed at which the robot is moving and grooving (inch/s)

5.40.3.8 pos_diff()

```
double OdometryBase::pos_diff (
            pose_t start_pos,
            pose_t end_pos ) [static]
```

Get the distance between two points

Parameters

start_pos	distance from this point
end_pos	to this point

Returns

the euclidean distance between start_pos and end_pos

5.40.3.9 rot_diff()

```
double OdometryBase::rot_diff (
            pose_t pos1,
            pose_t pos2 ) [static]
```

Get the change in rotation between two points

Parameters

pos1	position with initial rotation
pos2	position with final rotation

Returns

change in rotation between pos1 and pos2

Get the change in rotation between two points

5.40.3.10 set_position()

```
void OdometryBase::set_position (
            const pose_t & newpos = zero_pos ) [virtual]
```

Sets the current position of the robot

Parameters

newpos	the new position that the odometry will believe it is at

Sets the current position of the robot

Reimplemented in OdometryTank.

5.40.3.11 smallest_angle()

```
double OdometryBase::smallest_angle (
            double start_deg,
            double end_deg ) [static]
```

Get the smallest difference in angle between a start heading and end heading. Returns the difference between -180 degrees and +180 degrees, representing the robot turning left or right, respectively.

Parameters

start_deg	intitial angle (degrees)
end_deg	final angle (degrees)

Returns

the smallest angle from the initial to the final angle. This takes into account the wrapping of rotations around 360 degrees

Get the smallest difference in angle between a start heading and end heading. Returns the difference between -180 degrees and +180 degrees, representing the robot turning left or right, respectively.

5.40.3.12 update()

```
virtual pose_t OdometryBase::update ( ) [pure virtual]
```

Update the current position on the field based on the sensors

Returns

the location that the robot is at after the odometry does its calculations

Implemented in Odometry3Wheel, and OdometryTank.

5.40.4 Member Data Documentation

5.40.4.1 accel

```
double OdometryBase::accel [protected]
```

the rate at which we are accelerating (inch/s^2)

5.40.4.2 ang_accel_deg

```
double OdometryBase::ang_accel_deg [protected]
```

the rate at which we are accelerating our turn (deg/s^2)

5.40.4.3 ang_speed_deg

```
double OdometryBase::ang_speed_deg [protected]
```

the speed at which we are turning (deg/s)

5.40.4.4 current_pos

```
pose_t OdometryBase::current_pos [protected]
```

Current position of the robot in terms of x,y,rotation

5.40.4.5 handle

```
vex::task* OdometryBase::handle [protected]
```

handle to the vex task that is running the odometry code

5.40.4.6 mut

```
vex::mutex OdometryBase::mut [protected]
```

Mutex to control multithreading

5.40.4.7 speed

```
double OdometryBase::speed [protected]
```

the speed at which we are travelling (inch/s)

5.40.4.8 zero_pos

```
constexpr pose_t OdometryBase::zero_pos = {.x=0.0L, .y=0.0L, .rot=90.0L}  [inline], [static],
[constexpr]
```

Zeroed position. X=0, Y=0, Rotation= 90 degrees

The documentation for this class was generated from the following files:

- include/subsystems/odometry/odometry_base.h
- src/subsystems/odometry/odometry_base.cpp

5.41 screen::OdometryPage Class Reference

a page that shows odometry position and rotation and a map (if an sd card with the file is on)

```
#include <screen.h>
```

Inheritance diagram for screen::OdometryPage:

Public Member Functions

- **OdometryPage** (OdometryBase &odom, double width, double height, bool do_trail)
- void update (bool was_pressed, int x, int y) override

    collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))

- void draw (vex::brain::lcd &, bool first_draw, unsigned int frame_number) override

    draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

5.41.1 Detailed Description

a page that shows odometry position and rotation and a map (if an sd card with the file is on)

5.41.2 Member Function Documentation

5.41.2.1 draw()

```
void screen::OdometryPage::draw (
            vex::brain::lcd & screen,
            bool first_draw,
            unsigned int frame_number ) [override], [virtual]
```

draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

Parameters

first_draw	true if we just switched to this page
frame_number	frame of drawing we are on (basically an animation tick)

Reimplemented from screen::Page.

5.41.2.2 update()

```
void screen::OdometryPage::update (
            bool was_pressed,
            int x,
            int y )  [override], [virtual]
```

collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))

Parameters

was_pressed	true if the screen has been pressed
x	x position of screen press (if the screen was pressed)
y	y position of screen press (if the screen was pressed)

Reimplemented from screen::Page.

The documentation for this class was generated from the following files:

- include/subsystems/screen.h
- src/subsystems/screen.cpp

5.42 OdometryTank Class Reference

```
#include <odometry_tank.h>
```

Inheritance diagram for OdometryTank:

```
OdometryBase
    ↑
OdometryTank
```

Public Member Functions

- OdometryTank (vex::motor_group &left_side, vex::motor_group &right_side, robot_specs_t &config, vex←-::inertial ∗imu=NULL, bool is_async=true)
- OdometryTank (CustomEncoder &left_custom_enc, CustomEncoder &right_custom_enc, robot_specs_t &config, vex::inertial ∗imu=NULL, bool is_async=true)
- OdometryTank (vex::encoder &left_vex_enc, vex::encoder &right_vex_enc, robot_specs_t &config, vex←-::inertial ∗imu=NULL, bool is_async=true)
- pose_t update () override
- void set_position (const pose_t &newpos=zero_pos) override

Public Member Functions inherited from OdometryBase

- OdometryBase (bool is_async)
- pose_t get_position (void)
- void end_async ()
- double get_speed ()
- double get_accel ()
- double get_angular_speed_deg ()
- double get_angular_accel_deg ()

Additional Inherited Members

Static Public Member Functions inherited from OdometryBase

- static int background_task (void ∗ptr)
- static double pos_diff (pose_t start_pos, pose_t end_pos)
- static double rot_diff (pose_t pos1, pose_t pos2)
- static double smallest_angle (double start_deg, double end_deg)

Public Attributes inherited from OdometryBase

- bool **end_task** = false

    end_task is true if we instruct the odometry thread to shut down

Static Public Attributes inherited from OdometryBase

- static constexpr pose_t zero_pos = {.x=0.0L, .y=0.0L, .rot=90.0L}

Protected Attributes inherited from OdometryBase

- vex::task ∗ handle
- vex::mutex mut
- pose_t current_pos
- double speed
- double accel
- double ang_speed_deg
- double ang_accel_deg

5.42.1 Detailed Description

OdometryTank defines an odometry system for a tank drivetrain This requires encoders in the same orientation as the drive wheels Odometry is a "start and forget" subsystem, which means once it's created and configured, it will constantly run in the background and track the robot's X, Y and rotation coordinates.

5.42.2 Constructor & Destructor Documentation

5.42.2.1 OdometryTank() [1/3]

```
OdometryTank::OdometryTank (
            vex::motor_group & left_side,
            vex::motor_group & right_side,
            robot_specs_t & config,
            vex::inertial * imu = NULL,
            bool is_async = true )
```

Initialize the Odometry module, calculating position from the drive motors.

Parameters

left_side	The left motors
right_side	The right motors
config	the specifications that supply the odometry with descriptions of the robot. See robot_specs_t for what is contained
imu	The robot's inertial sensor. If not included, rotation is calculated from the encoders.
is_async	If true, position will be updated in the background continuously. If false, the programmer will have to manually call update().

5.42.2.2 OdometryTank() [2/3]

```
OdometryTank::OdometryTank (
            CustomEncoder & left_custom_enc,
            CustomEncoder & right_custom_enc,
            robot_specs_t & config,
            vex::inertial * imu = NULL,
            bool is_async = true )
```

Initialize the Odometry module, calculating position from the drive motors.

Parameters

left_custom_enc	The left custom encoder
right_custom_enc	The right custom encoder
config	the specifications that supply the odometry with descriptions of the robot. See robot_specs_t for what is contained
imu	The robot's inertial sensor. If not included, rotation is calculated from the encoders.
is_async	If true, position will be updated in the background continuously. If false, the programmer will have to manually call update().

5.42.2.3 OdometryTank() [3/3]

```
OdometryTank::OdometryTank (
            vex::encoder & left_vex_enc,
            vex::encoder & right_vex_enc,
            robot_specs_t & config,
            vex::inertial * imu = NULL,
            bool is_async = true )
```

Initialize the Odometry module, calculating position from the drive motors.

Parameters

left_vex_enc	The left vex encoder
right_vex_enc	The right vex encoder
config	the specifications that supply the odometry with descriptions of the robot. See robot_specs_t for what is contained
imu	The robot's inertial sensor. If not included, rotation is calculated from the encoders.
is_async	If true, position will be updated in the background continuously. If false, the programmer will have to manually call update().

5.42.3 Member Function Documentation

5.42.3.1 set_position()

```
void OdometryTank::set_position (
            const pose_t & newpos = zero_pos ) [override], [virtual]
```

set_position tells the odometry to place itself at a position

Parameters

newpos	the position the odometry will take

Resets the position and rotational data to the input.

Reimplemented from OdometryBase.

5.42.3.2 update()

```
pose_t OdometryTank::update ( ) [override], [virtual]
```

Update the current position on the field based on the sensors

Returns

the position that odometry has calculated itself to be at

Update, store and return the current position of the robot. Only use if not initializing with a separate thread.

Implements OdometryBase.

The documentation for this class was generated from the following files:

- include/subsystems/odometry/odometry_tank.h
- src/subsystems/odometry/odometry_tank.cpp

5.43 OdomSetPosition Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for OdomSetPosition:

Public Member Functions

- OdomSetPosition (OdometryBase &odom, const pose_t &newpos=OdometryBase::zero_pos)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.43.1 Detailed Description

AutoCommand wrapper class for the set_position function in the Odometry class

5.43.2 Constructor & Destructor Documentation

5.43.2.1 OdomSetPosition()

```
OdomSetPosition::OdomSetPosition (
            OdometryBase & odom,
            const pose_t & newpos = OdometryBase::zero_pos )
```

constructs a new OdomSetPosition command

Parameters

odom	the odometry system we are setting
newpos	the position we are telling the odometry to take. defaults to (0, 0), angle = 90

Construct an Odometry set pos

Parameters

odom	the odometry system we are setting
newpos	the now position to set the odometry to

5.43.3 Member Function Documentation

5.43.3.1 run()

```
bool OdomSetPosition::run ( )  [override], [virtual]
```

Run set_position Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.44 screen::Page Class Reference

Page describes one part of the screen slideshow.

```
#include <screen.h>
```

Inheritance diagram for screen::Page:

Public Member Functions

- virtual void update (bool was_pressed, int x, int y)

  collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))
- virtual void draw (vex::brain::lcd &screen, bool first_draw, unsigned int frame_number)

  draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

5.44.1 Detailed Description

Page describes one part of the screen slideshow.

5.44.2 Member Function Documentation

5.44.2.1 draw()

```
virtual void screen::Page::draw (
          vex::brain::lcd & screen,
          bool first_draw,
          unsigned int frame_number )  [virtual]
```

draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

Parameters

first_draw	true if we just switched to this page
frame_number	frame of drawing we are on (basically an animation tick)

Reimplemented in screen::StatsPage, screen::OdometryPage, and screen::FunctionPage.

5.44.2.2 update()

```
virtual void screen::Page::update (
            bool was_pressed,
            int x,
            int y )  [virtual]
```

collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))

Parameters

was_pressed	true if the screen has been pressed
x	x position of screen press (if the screen was pressed)
y	y position of screen press (if the screen was pressed)

Reimplemented in screen::StatsPage, screen::OdometryPage, and screen::FunctionPage.

The documentation for this class was generated from the following file:

- include/subsystems/screen.h

5.45 Parallel Class Reference

Parallel runs multiple commands in parallel and waits for all to finish before continuing. if none finish before this command's timeout, it will call on_timeout on all children continue.

```
#include <auto_command.h>
```

Inheritance diagram for Parallel:

Public Member Functions

- **Parallel** (std::initializer_list< AutoCommand ∗ > cmds)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.45.1 Detailed Description

Parallel runs multiple commands in parallel and waits for all to finish before continuing. if none finish before this command's timeout, it will call on_timeout on all children continue.

5.45.2 Member Function Documentation

5.45.2.1 on_timeout()

```
void Parallel::on_timeout ( )  [override], [virtual]
```

What to do if we timeout instead of finishing. timeout is specified by the timeout seconds in the constructor

Reimplemented from AutoCommand.

5.45.2.2 run()

```
bool Parallel::run ( )  [override], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/auto_command.h
- src/utils/command_structure/auto_command.cpp

5.46 parallel_runner_info Struct Reference

Public Attributes

- int **index**
- std::vector< vex::task ∗ > ∗ **runners**
- AutoCommand ∗ **cmd**

The documentation for this struct was generated from the following file:

- src/utils/command_structure/auto_command.cpp

5.47 PID Class Reference

```
#include <pid.h>
```

Inheritance diagram for PID:

```
Feedback
   ↑
  PID
```

Classes

- struct pid_config_t

Public Types

- enum ERROR_TYPE { **LINEAR** , **ANGULAR** }

Public Types inherited from Feedback

- enum **FeedbackType** { **PIDType** , **FeedforwardType** , **OtherType** }

Public Member Functions

- PID (pid_config_t &config)
- void init (double start_pt, double set_pt) override
- double update (double sensor_val) override
- double get () override
- void set_limits (double lower, double upper) override
- bool is_on_target () override
- void reset ()
- double get_error ()
- double get_target ()
- void set_target (double target)
- Feedback::FeedbackType get_type () override

Public Attributes

- [pid_config_t](#) & **config**

     configuration struct for this controller. see [pid_config_t](#) for information about what this contains

5.47.1 Detailed Description

[PID](#) Class

Defines a standard feedback loop using the constants kP, kI, kD, deadband, and on_target_time. The formula is:

out = kP∗error + kI∗integral(d Error) + kD∗(dError/dt)

The [PID](#) object will determine it is "on target" when the error is within the deadband, for a duration of on_target_time

Author

   Ryan McGee

Date

   4/3/2020

5.47.2 Member Enumeration Documentation

5.47.2.1 ERROR_TYPE

enum [PID::ERROR_TYPE](#)

An enum to distinguish between a linear and angular caluclation of [PID](#) error.

5.47.3 Constructor & Destructor Documentation

5.47.3.1 PID()

```
PID::PID (
          pid_config_t & config )
```

Create the [PID](#) object

Parameters

config	the configuration data for this controller

Create the [PID](#) object

5.47.4 Member Function Documentation

5.47.4.1 get()

```
double PID::get ( )  [override], [virtual]
```

Gets the current PID out value, from when update() was last run

Returns

the Out value of the controller (voltage, RPM, whatever the PID controller is controlling)

Gets the current PID out value, from when update() was last run

Implements Feedback.

5.47.4.2 get_error()

```
double PID::get_error ( )
```

Get the delta between the current sensor data and the target

Returns

the error calculated. how it is calculated depends on error_method specified in pid_config_t

Get the delta between the current sensor data and the target

5.47.4.3 get_target()

```
double PID::get_target ( )
```

Get the PID's target

Returns

the target the PID controller is trying to achieve

5.47.4.4 get_type()

```
Feedback::FeedbackType PID::get_type ( )  [override], [virtual]
```

Reimplemented from Feedback.

5.47.4.5 init()

```
void PID::init (
            double start_pt,
            double set_pt )  [override], [virtual]
```

Inherited from Feedback for interoperability. Update the setpoint and reset integral accumulation

start_pt can be safely ignored in this feedback controller

Parameters

start←_pt	commpletely ignored for PID. necessary to satisfy Feedback base
set_pt	sets the target of the PID controller

Implements Feedback.

5.47.4.6   is_on_target()

```
bool PID::is_on_target ( )   [override], [virtual]
```

Checks if the PID controller is on target.

Returns

  true if the loop is within [deadband] for [on_target_time] seconds

Returns true if the loop is within [deadband] for [on_target_time] seconds

Implements Feedback.

5.47.4.7   reset()

```
void PID::reset ( )
```

Reset the PID loop by resetting time since 0 and accumulated error.

5.47.4.8   set_limits()

```
void PID::set_limits (
            double lower,
            double upper )   [override], [virtual]
```

Set the limits on the PID out. The PID out will "clip" itself to be between the limits.

Parameters

lower	the lower limit. the PID controller will never command the output go below `lower`
upper	the upper limit. the PID controller will never command the output go higher than `upper`

Set the limits on the PID out. The PID out will "clip" itself to be between the limits.

Implements Feedback.

5.47.4.9 set_target()

```
void PID::set_target (
            double target )
```

Set the target for the [PID](#) loop, where the robot is trying to end up

Parameters

target	the sensor reading we would like to achieve

Set the target for the [PID](#) loop, where the robot is trying to end up

5.47.4.10 update()

```
double PID::update (
            double sensor_val )  [override], [virtual]
```

Update the [PID](#) loop by taking the time difference from last update, and running the [PID](#) formula with the new sensor data

Parameters

sensor_val	the distance, angle, encoder position or whatever it is we are measuring

Returns

the new output. What would be returned by [PID::get()](#)

Implements [Feedback](#).

The documentation for this class was generated from the following files:

- include/utils/pid.h
- src/utils/pid.cpp

5.48 PID::pid_config_t Struct Reference

```
#include <pid.h>
```

Public Attributes

- double **p**

    proportional coeffecient p ∗ error()
- double **i**

    integral coeffecient i ∗ integral(error)
- double **d**

derivitave coeffecient d ∗ derivative(error)

- double **deadband**

  at what threshold are we close enough to be finished

- double **on_target_time**

  the time in seconds that we have to be on target for to say we are officially at the target

- ERROR_TYPE **error_method**

  Linear or angular. wheter to do error as a simple subtraction or to wrap.

5.48.1 Detailed Description

pid_config_t holds the configuration parameters for a pid controller In addtion to the constant of proportional, integral and derivative, these parameters include:

- deadband -

- on_target_time - for how long do we have to be at the target to stop As well, pid_config_t holds an error type which determines whether errors should be calculated as if the sensor position is a measure of distance or an angle

The documentation for this struct was generated from the following file:

- include/utils/pid.h

5.49 PIDFF Class Reference

Inheritance diagram for PIDFF:

```
        ┌──────────┐
        │ Feedback │
        └──────────┘
             ▲
             │
        ┌──────────┐
        │  PIDFF   │
        └──────────┘
```

Public Member Functions

- **PIDFF** (PID::pid_config_t &pid_cfg, FeedForward::ff_config_t &ff_cfg)
- void init (double start_pt, double set_pt) override
- void set_target (double set_pt)
- double update (double val) override
- double update (double val, double vel_setpt, double a_setpt=0)
- double get () override
- void set_limits (double lower, double upper) override
- bool is_on_target () override

Public Member Functions inherited from Feedback

- virtual Feedback::FeedbackType **get_type** ()

Public Attributes

- [PID](#) **pid**

Additional Inherited Members

Public Types inherited from [Feedback](#)

- enum **FeedbackType** { **PIDType** , **FeedforwardType** , **OtherType** }

5.49.1 Member Function Documentation

5.49.1.1 get()

```
double PIDFF::get ( )  [override], [virtual]
```

Returns

the last saved result from the feedback controller

Implements [Feedback](#).

5.49.1.2 init()

```
void PIDFF::init (
            double start_pt,
            double set_pt )  [override], [virtual]
```

Initialize the feedback controller for a movement

Parameters

start↵_pt	the current sensor value
set_pt	where the sensor value should be

Implements [Feedback](#).

5.49.1.3 is_on_target()

```
bool PIDFF::is_on_target ( )  [override], [virtual]
```

Returns

true if the feedback controller has reached it's setpoint

Implements [Feedback](#).

5.49.1.4 set_limits()

```
void PIDFF::set_limits (
            double lower,
            double upper )  [override], [virtual]
```

Clamp the upper and lower limits of the output. If both are 0, no limits should be applied.

Parameters

lower	Upper limit
upper	Lower limit

Implements Feedback.

5.49.1.5 set_target()

```
void PIDFF::set_target (
            double set_pt )
```

Set the target of the PID loop

Parameters

set↩ _pt	Setpoint / target value

5.49.1.6 update() [1/2]

```
double PIDFF::update (
            double val )  [override], [virtual]
```

Iterate the feedback loop once with an updated sensor value. Only kS for feedfoward will be applied.

Parameters

val	value from the sensor

Returns

    feedback loop result

Implements Feedback.

5.49.1.7 update() [2/2]

```
double PIDFF::update (
            double val,
```

```
          double vel_setpt,
          double a_setpt = 0 )
```

Iterate the feedback loop once with an updated sensor value

Parameters

val	value from the sensor
vel_setpt	Velocity for feedforward
a_setpt	Acceleration for feedfoward

Returns

feedback loop result

The documentation for this class was generated from the following files:

- include/utils/pidff.h
- src/utils/pidff.cpp

5.50 point_t Struct Reference

```
#include <geometry.h>
```

Public Member Functions

- double dist (const point_t other) const
- point_t operator+ (const point_t &other)
- point_t operator- (const point_t &other)
- point_t **operator∗** (double s) const
- point_t **operator/** (double s) const
- point_t **operator-** () const
- point_t **operator+** () const
- bool **operator==** (const point_t &rhs)

Public Attributes

- double **x**
    the x position in space
- double **y**
    the y position in space

5.50.1 Detailed Description

Data structure representing an X,Y coordinate

5.50.2 Member Function Documentation

5.50.2.1 dist()

```
double point_t::dist (
          const point_t other ) const  [inline]
```

dist calculates the euclidian distance between this point and another point using the pythagorean theorem

Parameters

other	the point to measure the distance from

Returns

the euclidian distance between this and other

5.50.2.2 operator+()

```
point_t point_t::operator+ (
            const point_t & other ) [inline]
```

Vector2D addition operation on points

Parameters

other	the point to add on to this

Returns

this + other (this.x + other.x, this.y + other.y)

5.50.2.3 operator-()

```
point_t point_t::operator- (
            const point_t & other ) [inline]
```

Vector2D subtraction operation on points

Parameters

other	the point_t to subtract from this

Returns

this - other (this.x - other.x, this.y - other.y)

The documentation for this struct was generated from the following file:

- include/utils/geometry.h

5.51 pose_t Struct Reference

```
#include <geometry.h>
```

Public Member Functions

- point_t **get_point** ()

Public Attributes

- double **x**

    x position in the world
- double **y**

    y position in the world
- double **rot**

    rotation in the world

5.51.1   Detailed Description

Describes a single position and rotation

The documentation for this struct was generated from the following file:

- include/utils/geometry.h

5.52   PurePursuitCommand Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for PurePursuitCommand:

```
┌─────────────────────┐
│    AutoCommand       │
└─────────────────────┘
          ▲
          │
┌─────────────────────┐
│  PurePursuitCommand  │
└─────────────────────┘
```

Public Member Functions

- PurePursuitCommand (TankDrive &drive_sys, Feedback &feedback, std::vector< point_t > path, direction↩
  Type dir, double radius, double max_speed=1)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.52.1 Detailed Description

Autocommand wrapper class for pure pursuit function in the TankDrive class

5.52.2 Constructor & Destructor Documentation

5.52.2.1 PurePursuitCommand()

```
PurePursuitCommand::PurePursuitCommand (
            TankDrive & drive_sys,
            Feedback & feedback,
            std::vector< point_t > path,
            directionType dir,
            double radius,
            double max_speed = 1 )
```

Construct a Pure Pursuit AutoCommand

Parameters

path	The list of coordinates to follow, in order
dir	Run the bot forwards or backwards
radius	How big the corner cutting should be - small values follow the path more closely
feedback	The feedback controller determining speed
max_speed	Limit the speed of the robot (for pid / pidff feedbacks)

5.52.3 Member Function Documentation

5.52.3.1 on_timeout()

```
void PurePursuitCommand::on_timeout ( )  [override], [virtual]
```

Reset the drive system when it times out

Reimplemented from AutoCommand.

5.52.3.2 run()

```
bool PurePursuitCommand::run ( ) [override], [virtual]
```

Direct call to TankDrive::pure_pursuit

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.53 robot_specs_t Struct Reference

```
#include <robot_specs.h>
```

Public Attributes

- double **robot_radius**

  if you were to draw a circle with this radius, the robot would be entirely contained within it

- double **odom_wheel_diam**

  the diameter of the wheels used for

- double **odom_gear_ratio**

  the ratio of the odometry wheel to the encoder reading odometry data

- double **dist_between_wheels**

  the distance between centers of the central drive wheels

- double **drive_correction_cutoff**

  the distance at which to stop trying to turn towards the target. If we are less than this value, we can continue driving forward to minimize our distance but will not try to spin around to point directly at the target

- Feedback ∗ **drive_feedback**

  the default feedback for autonomous driving

- Feedback ∗ **turn_feedback**

  the defuault feedback for autonomous turning

- PID::pid_config_t **correction_pid**

  the pid controller to keep the robot driving in as straight a line as possible

5.53.1 Detailed Description

Main robot characterization struct. This will be passed to all the major subsystems that require info about the robot. All distance measurements are in inches.

The documentation for this struct was generated from the following file:

- include/robot_specs.h

5.54 screen::ScreenData Struct Reference

The ScreenData class holds the data that will be passed to the screen thread you probably shouldnt have to use it.

Public Member Functions

- **ScreenData** (const std::vector< Page * > &m_pages, int m_page, vex::brain::lcd &m_screen)

Public Attributes

- std::vector< Page * > **pages**
- int **page** = 0
- vex::brain::lcd **screen**

5.54.1 Detailed Description

The ScreenData class holds the data that will be passed to the screen thread you probably shouldnt have to use it.

The documentation for this struct was generated from the following file:

- src/subsystems/screen.cpp

5.55 Serializer Class Reference

Serializes Arbitrary data to a file on the SD Card.

```
#include <serializer.h>
```

Public Member Functions

- ∼**Serializer** ()

    Save and close upon destruction (bc of vex, this doesnt always get called when the program ends. To be sure, call save_to_disk)
- Serializer (const std::string &filename, bool flush_always=true)

    create a Serializer
- void save_to_disk () const

    saves current Serializer state to disk
- void set_int (const std::string &name, int i)

    Setters - not saved until save_to_disk is called.
- void set_bool (const std::string &name, bool b)

    sets a bool by the name of name to b. If flush_always == true, this will save to the sd card
- void set_double (const std::string &name, double d)

    sets a double by the name of name to d. If flush_always == true, this will save to the sd card
- void set_string (const std::string &name, std::string str)

    sets a string by the name of name to s. If flush_always == true, this will save to the sd card
- int int_or (const std::string &name, int otherwise)

    gets a value stored in the serializer. If not found, sets the value to otherwise
- bool bool_or (const std::string &name, bool otherwise)

    gets a value stored in the serializer. If not, sets the value to otherwise
- double double_or (const std::string &name, double otherwise)

    gets a value stored in the serializer. If not, sets the value to otherwise
- std::string string_or (const std::string &name, std::string otherwise)

    gets a value stored in the serializer. If not, sets the value to otherwise

5.55.1   Detailed Description

Serializes Arbitrary data to a file on the SD Card.

5.55.2   Constructor & Destructor Documentation

5.55.2.1   Serializer()

```
Serializer::Serializer (
            const std::string & filename,
            bool flush_always = true )  [inline], [explicit]
```

create a [Serializer]

Parameters

filename	the file to read from. If filename does not exist we will create that file
flush_always	If true, after every write flush to a file. If false, you are responsible for calling save_to_disk

5.55.3   Member Function Documentation

5.55.3.1   bool_or()

```
bool Serializer::bool_or (
            const std::string & name,
            bool otherwise )
```

gets a value stored in the serializer. If not, sets the value to otherwise

Parameters

name	name of value
otherwise	value if the name is not specified

Returns

the value if found or otherwise

5.55.3.2   double_or()

```
double Serializer::double_or (
            const std::string & name,
            double otherwise )
```

gets a value stored in the serializer. If not, sets the value to otherwise

Parameters

name	name of value
otherwise	value if the name is not specified

Returns

the value if found or otherwise

5.55.3.3 int_or()

```
int Serializer::int_or (
            const std::string & name,
            int otherwise )
```

gets a value stored in the serializer. If not found, sets the value to otherwise

Getters Return value if it exists in the serializer

Parameters

name	name of value
otherwise	value if the name is not specified

Returns

the value if found or otherwise

5.55.3.4 save_to_disk()

```
void Serializer::save_to_disk ( ) const
```

saves current Serializer state to disk

forms data bytes then saves to filename this was openned with

5.55.3.5 set_bool()

```
void Serializer::set_bool (
            const std::string & name,
            bool b )
```

sets a bool by the name of name to b. If flush_always == true, this will save to the sd card

Parameters

name	name of bool
b	value of bool

5.55.3.6 set_double()

```
void Serializer::set_double (
            const std::string & name,
            double d )
```

sets a double by the name of name to d. If flush_always == true, this will save to the sd card

Parameters

name	name of double
d	value of double

5.55.3.7 set_int()

```
void Serializer::set_int (
            const std::string & name,
            int i )
```

Setters - not saved until save_to_disk is called.

sets an integer by the name of name to i. If flush_always == true, this will save to the sd card

Parameters

name	name of integer
i	value of integer

5.55.3.8 set_string()

```
void Serializer::set_string (
            const std::string & name,
            std::string str )
```

sets a string by the name of name to s. If flush_always == true, this will save to the sd card

Parameters

name	name of string
i	value of string

5.55.3.9 string_or()

```
std::string Serializer::string_or (
            const std::string & name,
            std::string otherwise )
```

gets a value stored in the serializer. If not, sets the value to otherwise

Parameters

name	name of value
otherwise	value if the name is not specified

Returns

the value if found or otherwise

The documentation for this class was generated from the following files:

- include/utils/serializer.h
- src/utils/serializer.cpp

5.56 SpinRPMCommand Class Reference

```
#include <flywheel_commands.h>
```

Inheritance diagram for SpinRPMCommand:

```
AutoCommand
    ↑
SpinRPMCommand
```

Public Member Functions

- SpinRPMCommand (Flywheel &flywheel, int rpm)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.56.1 Detailed Description

File: flywheel_commands.h Desc: [insert meaningful desc] AutoCommand wrapper class for the spinRPM function in the Flywheel class

5.56.2 Constructor & Destructor Documentation

5.56.2.1 SpinRPMCommand()

```
SpinRPMCommand::SpinRPMCommand (
            Flywheel & flywheel,
            int rpm )
```

Construct a SpinRPM Command

Parameters

flywheel	the flywheel sys to command
rpm	the rpm that we should spin at

File: flywheel_commands.cpp Desc: [insert meaningful desc]

5.56.3 Member Function Documentation

5.56.3.1 run()

```
bool SpinRPMCommand::run ( )  [override], [virtual]
```

Run spin_manual Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/flywheel_commands.h
- src/utils/command_structure/flywheel_commands.cpp

5.57 PurePursuit::spline Struct Reference

```
#include <pure_pursuit.h>
```

Public Member Functions

- double **getY** (double x)

Public Attributes

- double **a**
- double **b**
- double **c**
- double **d**
- double **x_start**
- double **x_end**

5.57.1 Detailed Description

Represents a piece of a cubic spline with s(x) = a(x-xi)^3 + b(x-xi)^2 + c(x-xi) + d The x_start and x_end shows where the equation is valid.

The documentation for this struct was generated from the following file:

- include/utils/pure_pursuit.h

5.58 screen::StatsPage Class Reference

Inheritance diagram for screen::StatsPage:

Public Member Functions

- **StatsPage** (std::map< std::string, vex::motor & > motors)
- void update (bool was_pressed, int x, int y) override

    collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))
- void draw (vex::brain::lcd &, bool first_draw, unsigned int frame_number) override

    draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

5.58.1 Member Function Documentation

5.58.1.1 draw()

```
void screen::StatsPage::draw (
            vex::brain::lcd & screen,
            bool first_draw,
            unsigned int frame_number ) [override], [virtual]
```

draw stored data to the screen (runs at 10 hz and only runs if this page is in front)

Parameters

first_draw	true if we just switched to this page
frame_number	frame of drawing we are on (basically an animation tick)

Reimplemented from screen::Page.

5.58.1.2 update()

```
void screen::StatsPage::update (
            bool was_pressed,
            int x,
            int y )  [override], [virtual]
```

collect data, respond to screen input, do fast things (runs at 50hz even if you're not focused on this Page (only drawn page gets touch updates))

Parameters

was_pressed	true if the screen has been pressed
x	x position of screen press (if the screen was pressed)
y	y position of screen press (if the screen was pressed)

Reimplemented from screen::Page.

The documentation for this class was generated from the following files:

- include/subsystems/screen.h
- src/subsystems/screen.cpp

5.59 TankDrive Class Reference

```
#include <tank_drive.h>
```

Public Member Functions

- TankDrive (motor_group &left_motors, motor_group &right_motors, robot_specs_t &config, OdometryBase ∗odom=NULL)
- AutoCommand ∗ **DriveToPointCmd** (point_t pt, vex::directionType dir=vex::forward, double max_speed=1.0)
- AutoCommand ∗ **DriveToPointCmd** (Feedback &fb, point_t pt, vex::directionType dir=vex::forward, double max_speed=1.0)
- AutoCommand ∗ **DriveForwardCmd** (double dist, vex::directionType dir=vex::forward, double max_↩ speed=1.0)
- AutoCommand ∗ **DriveForwardCmd** (Feedback &fb, double dist, vex::directionType dir=vex::forward, double max_speed=1.0)
- AutoCommand ∗ **TurnToHeadingCmd** (double heading, double max_speed=1.0)
- AutoCommand ∗ **TurnToHeadingCmd** (Feedback &fb, double heading, double max_speed=1.0)
- AutoCommand ∗ **TurnDegreesCmd** (double degrees, double max_speed=1.0)

- AutoCommand ∗ **TurnDegreesCmd** (Feedback &fb, double degrees, double max_speed=1.0)
- AutoCommand ∗ **PurePursuitCmd** (std::vector< point_t > path, directionType dir, double radius, double max_speed=1)
- AutoCommand ∗ **PurePursuitCmd** (Feedback &feedback, std::vector< point_t > path, directionType dir, double radius, double max_speed=1)
- void stop ()
- void drive_tank (double left, double right, int power=1)
- void drive_arcade (double forward_back, double left_right, int power=1)
- bool drive_forward (double inches, directionType dir, Feedback &feedback, double max_speed=1)
- bool drive_forward (double inches, directionType dir, double max_speed=1)
- bool turn_degrees (double degrees, Feedback &feedback, double max_speed=1)
- bool turn_degrees (double degrees, double max_speed=1)
- bool drive_to_point (double x, double y, vex::directionType dir, Feedback &feedback, double max_speed=1)
- bool drive_to_point (double x, double y, vex::directionType dir, double max_speed=1)
- bool turn_to_heading (double heading_deg, Feedback &feedback, double max_speed=1)
- bool turn_to_heading (double heading_deg, double max_speed=1)
- void reset_auto ()
- bool pure_pursuit (std::vector< point_t > path, directionType dir, double radius, Feedback &feedback, double max_speed=1)
- bool pure_pursuit (std::vector< point_t > path, directionType dir, double radius, double max_speed=1)

Static Public Member Functions

- static double modify_inputs (double input, int power=2)

5.59.1 Detailed Description

TankDrive is a class to run a tank drive system. A tank drive system, sometimes called differential drive, has a motor (or group of synchronized motors) on the left and right side

5.59.2 Constructor & Destructor Documentation

5.59.2.1 TankDrive()

```
TankDrive::TankDrive (
            motor_group & left_motors,
            motor_group & right_motors,
            robot_specs_t & config,
            OdometryBase * odom = NULL )
```

Create the TankDrive object

Parameters

left_motors	left side drive motors
right_motors	right side drive motors
config	the configuration specification defining physical dimensions about the robot. See robot_specs_t for more info
odom	an odometry system to track position and rotation. this is necessary to execute autonomous paths

5.59.3 Member Function Documentation

5.59.3.1 drive_arcade()

```
void TankDrive::drive_arcade (
            double forward_back,
            double left_right,
            int power = 1 )
```

Drive the robot using arcade style controls. forward_back controls the linear motion, left_right controls the turning.

forward_back and left_right are in "percent": -1.0 -> 1.0

Parameters

forward_back	the percent to move forward or backward
left_right	the percent to turn left or right
power	modifies the input velocities left$^\wedge$power, right$^\wedge$power

Drive the robot using arcade style controls. forward_back controls the linear motion, left_right controls the turning.

left_motors and right_motors are in "percent": -1.0 -> 1.0

5.59.3.2 drive_forward() [1/2]

```
bool TankDrive::drive_forward (
            double inches,
            directionType dir,
            double max_speed = 1 )
```

Autonomously drive the robot forward a certain distance

Parameters

inches	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
dir	the direction we want to travel forward and backward
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Autonomously drive the robot forward a certain distance

Parameters

inches	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
dir	the direction we want to travel forward and backward
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

> true if we have finished driving to our point

5.59.3.3 drive_forward() [2/2]

```
bool TankDrive::drive_forward (
            double inches,
            directionType dir,
            Feedback & feedback,
            double max_speed = 1 )
```

Use odometry to drive forward a certain distance using a custom feedback controller

Returns whether or not the robot has reached it's destination.

Parameters

inches	the distance to drive forward
dir	the direction we want to travel forward and backward
feedback	the custom feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

> true when we have reached our target distance

Use odometry to drive forward a certain distance using a custom feedback controller

Returns whether or not the robot has reached it's destination.

Parameters

inches	the distance to drive forward
dir	the direction we want to travel forward and backward
feedback	the custom feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

5.59.3.4 drive_tank()

```
void TankDrive::drive_tank (
            double left,
            double right,
            int power = 1 )
```

Drive the robot using differential style controls. left_motors controls the left motors, right_motors controls the right motors.

left_motors and right_motors are in "percent": -1.0 -> 1.0

Parameters

left	the percent to run the left motors
right	the percent to run the right motors
power	modifies the input velocities left^power, right^power
isdriver	default false. if true uses motor percentage. if false uses plain percentage of maximum voltage

Drive the robot using differential style controls. left_motors controls the left motors, right_motors controls the right motors.

left_motors and right_motors are in "percent": -1.0 -> 1.0

5.59.3.5 drive_to_point() [1/2]

```
bool TankDrive::drive_to_point (
            double x,
            double y,
            vex::directionType dir,
            double max_speed = 1 )
```

Use odometry to automatically drive the robot to a point on the field. X and Y is the final point we want the robot. Here we use the default feedback controller from the drive_sys

Returns whether or not the robot has reached it's destination.

Parameters

x	the x position of the target
y	the y position of the target
dir	the direction we want to travel forward and backward
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Use odometry to automatically drive the robot to a point on the field. X and Y is the final point we want the robot. Here we use the default feedback controller from the drive_sys

Returns whether or not the robot has reached it's destination.

Parameters

x	the x position of the target
y	the y position of the target
dir	the direction we want to travel forward and backward
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

> true if we have reached our target point

5.59.3.6 drive_to_point() [2/2]

```
bool TankDrive::drive_to_point (
            double x,
            double y,
            vex::directionType dir,
            Feedback & feedback,
            double max_speed = 1 )
```

Use odometry to automatically drive the robot to a point on the field. X and Y is the final point we want the robot.

Returns whether or not the robot has reached it's destination.

Parameters

x	the x position of the target
y	the y position of the target
dir	the direction we want to travel forward and backward
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Use odometry to automatically drive the robot to a point on the field. X and Y is the final point we want the robot.

Returns whether or not the robot has reached it's destination.

Parameters

x	the x position of the target
y	the y position of the target
dir	the direction we want to travel forward and backward
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

true if we have reached our target point

5.59.3.7 modify_inputs()

```
double TankDrive::modify_inputs (
            double input,
            int power = 2 )  [static]
```

Create a curve for the inputs, so that drivers have more control at lower speeds. Curves are exponential, with the default being squaring the inputs.

Parameters

input	the input before modification
power	the power to raise input to

Returns

input $^\wedge$ power (accounts for negative inputs and odd numbered powers)

Modify the inputs from the controller by squaring / cubing, etc Allows for better control of the robot at slower speeds

Parameters

input	the input signal -1 -> 1
power	the power to raise the signal to

Returns

input^power accounting for any sign issues that would arise with this naive solution

5.59.3.8 pure_pursuit() [1/2]

```
bool TankDrive::pure_pursuit (
            std::vector< point_t > path,
            directionType dir,
            double radius,
            double max_speed = 1 )
```

Drive the robot autonomously using a pure-pursuit algorithm - Input path with a set of waypoints - the robot will attempt to follow the points while cutting corners (radius) to save time (compared to stop / turn / start)

Use the default drive feedback

Parameters

path	The list of coordinates to follow, in order
dir	Run the bot forwards or backwards
radius	How big the corner cutting should be - small values follow the path more closely
max_speed	Limit the speed of the robot (for pid / pidff feedbacks)

Returns

True when the path is complete

5.59.3.9 pure_pursuit() [2/2]

```
bool TankDrive::pure_pursuit (
            std::vector< point_t > path,
            directionType dir,
            double radius,
            Feedback & feedback,
            double max_speed = 1 )
```

Drive the robot autonomously using a pure-pursuit algorithm - Input path with a set of waypoints - the robot will attempt to follow the points while cutting corners (radius) to save time (compared to stop / turn / start)

Parameters

path	The list of coordinates to follow, in order
dir	Run the bot forwards or backwards
radius	How big the corner cutting should be - small values follow the path more closely
feedback	The feedback controller determining speed
max_speed	Limit the speed of the robot (for pid / pidff feedbacks)

Returns

True when the path is complete

5.59.3.10 reset_auto()

```
void TankDrive::reset_auto ( )
```

Reset the initialization for autonomous drive functions

5.59.3.11 stop()

```
void TankDrive::stop ( )
```

Stops rotation of all the motors using their "brake mode"

5.59.3.12 turn_degrees() [1/2]

```
bool TankDrive::turn_degrees (
        double degrees,
        double max_speed = 1 )
```

Autonomously turn the robot X degrees to counterclockwise (negative for clockwise), with a maximum motor speed of percent_speed (-1.0 -> 1.0)

Uses the defualt turning feedback of the drive system.

Parameters

degrees	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Autonomously turn the robot X degrees to counterclockwise (negative for clockwise), with a maximum motor speed of percent_speed (-1.0 -> 1.0)

Uses the defualt turning feedback of the drive system.

Parameters

degrees	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

true if we turned te target number of degrees

5.59.3.13 turn_degrees() [2/2]

```
bool TankDrive::turn_degrees (
```

```
        double degrees,
        Feedback & feedback,
        double max_speed = 1 )
```

Autonomously turn the robot X degrees counterclockwise (negative for clockwise), with a maximum motor speed of percent_speed (-1.0 -> 1.0)

Uses PID + Feedforward for it's control.

Parameters

degrees	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Autonomously turn the robot X degrees to counterclockwise (negative for clockwise), with a maximum motor speed of percent_speed (-1.0 -> 1.0)

Uses the specified feedback for it's control.

Parameters

degrees	degrees by which we will turn relative to the robot (+) turns ccw, (-) turns cw
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

true if we have turned our target number of degrees

5.59.3.14 turn_to_heading() [1/2]

```
bool TankDrive::turn_to_heading (
        double heading_deg,
        double max_speed = 1 )
```

Turn the robot in place to an exact heading relative to the field. 0 is forward. Uses the defualt turn feedback of the drive system

Parameters

heading_deg	the heading to which we will turn
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Turn the robot in place to an exact heading relative to the field. 0 is forward. Uses the defualt turn feedback of the drive system

Parameters

heading_deg	the heading to which we will turn
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

> true if we have reached our target heading

5.59.3.15 turn_to_heading() [2/2]

```
bool TankDrive::turn_to_heading (
            double heading_deg,
            Feedback & feedback,
            double max_speed = 1 )
```

Turn the robot in place to an exact heading relative to the field. 0 is forward.

Parameters

heading_deg	the heading to which we will turn
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Turn the robot in place to an exact heading relative to the field. 0 is forward.

Parameters

heading_deg	the heading to which we will turn
feedback	the feedback controller we will use to travel. controls the rate at which we accelerate and drive.
max_speed	the maximum percentage of robot speed at which the robot will travel. 1 = full power

Returns

> true if we have reached our target heading

The documentation for this class was generated from the following files:

- include/subsystems/tank_drive.h
- src/subsystems/tank_drive.cpp

5.60 TrapezoidProfile Class Reference

```
#include <trapezoid_profile.h>
```

Public Member Functions

- TrapezoidProfile (double max_v, double accel)

    Construct a new Trapezoid Profile object.
- motion_t calculate (double time_s)

    Run the trapezoidal profile based on the time that's ellapsed.
- void set_endpts (double start, double end)
- void set_accel (double accel)
- void set_max_v (double max_v)
- double get_movement_time ()

5.60.1 Detailed Description

Trapezoid Profile

This is a motion profile defined by an acceleration, maximum velocity, start point and end point. Using this information, a parametric function is generated, with a period of acceleration, constant velocity, and deceleration. The velocity graph looks like a trapezoid, giving it it's name.

If the maximum velocity is set high enough, this will become a S-curve profile, with only acceleration and deceleration.

This class is designed for use in properly modelling the motion of the robots to create a feedfoward and target for PID. Acceleration and Maximum velocity should be measured on the robot and tuned down slightly to account for battery drop.

Here are the equations graphed for ease of understanding: https://www.desmos.com/calculator/rkm3ivu1yk

Author

> Ryan McGee

Date

> 7/12/2022

5.60.2 Constructor & Destructor Documentation

5.60.2.1 TrapezoidProfile()

```
TrapezoidProfile::TrapezoidProfile (
          double max_v,
          double accel )
```

Construct a new Trapezoid Profile object.

Parameters

max← _v	Maximum velocity the robot can run at
accel	Maximum acceleration of the robot

5.60.3 Member Function Documentation

5.60.3.1 calculate()

```
motion_t TrapezoidProfile::calculate (
          double time_s )
```

Run the trapezoidal profile based on the time that's ellapsed.

Parameters

time← *_s*	Time since start of movement

Returns

[motion_t](#) Position, velocity and acceleration

5.60.3.2 get_movement_time()

```
double TrapezoidProfile::get_movement_time ( )
```

uses the kinematic equations to and specified accel and max_v to figure out how long moving along the profile would take

Returns

the time the path will take to travel

5.60.3.3 set_accel()

```
void TrapezoidProfile::set_accel (
            double accel )
```

set_accel sets the acceleration this profile will use (the left and right legs of the trapezoid)

Parameters

accel	the acceleration amount to use

5.60.3.4 set_endpts()

```
void TrapezoidProfile::set_endpts (
            double start,
            double end )
```

set_endpts defines a start and end position

Parameters

start	the starting position of the path
end	the ending position of the path

5.60.3.5 set_max_v()

```
void TrapezoidProfile::set_max_v (
            double max_v )
```

sets the maximum velocity for the profile (the height of the top of the trapezoid)

Parameters

| *max⤶* | the maximum velocity the robot can travel at |
| *_v* | |

The documentation for this class was generated from the following files:

- include/utils/trapezoid_profile.h
- src/utils/trapezoid_profile.cpp

5.61 TurnDegreesCommand Class Reference

```
#include <drive_commands.h>
```

Inheritance diagram for TurnDegreesCommand:

```
┌─────────────────────────┐
│      AutoCommand         │
└─────────────────────────┘
            ▲
┌─────────────────────────┐
│   TurnDegreesCommand     │
└─────────────────────────┘
```

Public Member Functions

- TurnDegreesCommand (TankDrive &drive_sys, Feedback &feedback, double degrees, double max_speed=1)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from AutoCommand

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.61.1 Detailed Description

AutoCommand wrapper class for the turn_degrees function in the TankDrive class

5.61.2 Constructor & Destructor Documentation

5.61.2.1 TurnDegreesCommand()

```
TurnDegreesCommand::TurnDegreesCommand (
            TankDrive & drive_sys,
            Feedback & feedback,
            double degrees,
            double max_speed = 1 )
```

Construct a TurnDegreesCommand Command

Parameters

drive_sys	the drive system we are commanding
feedback	the feedback controller we are using to execute the turn
degrees	how many degrees to rotate
max_speed	0 -> 1 percentage of the drive systems speed to drive at

5.61.3 Member Function Documentation

5.61.3.1 on_timeout()

```
void TurnDegreesCommand::on_timeout ( )  [override], [virtual]
```

Cleans up drive system if we time out before finishing

reset the drive system if we timeout

Reimplemented from AutoCommand.

5.61.3.2 run()

```
bool TurnDegreesCommand::run ( )  [override], [virtual]
```

Run turn_degrees Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.62 TurnToHeadingCommand Class Reference

`#include <drive_commands.h>`

Inheritance diagram for TurnToHeadingCommand:

Public Member Functions

- TurnToHeadingCommand (TankDrive &drive_sys, Feedback &feedback, double heading_deg, double speed=1)
- bool run () override
- void on_timeout () override

Public Member Functions inherited from **AutoCommand**

- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from **AutoCommand**

- double timeout_seconds = default_timeout

Static Public Attributes inherited from **AutoCommand**

- static constexpr double **default_timeout** = 10.0

5.62.1 Detailed Description

AutoCommand wrapper class for the turn_to_heading() function in the TankDrive class

5.62.2 Constructor & Destructor Documentation

5.62.2.1 TurnToHeadingCommand()

```
TurnToHeadingCommand::TurnToHeadingCommand (
        TankDrive & drive_sys,
        Feedback & feedback,
        double heading_deg,
        double max_speed = 1 )
```

Construct a TurnToHeadingCommand Command

Parameters

drive_sys	the drive system we are commanding
feedback	the feedback controller we are using to execute the drive
heading_deg	the heading to turn to in degrees
max_speed	0 -> 1 percentage of the drive systems speed to drive at

5.62.3 Member Function Documentation

5.62.3.1 on_timeout()

```
void TurnToHeadingCommand::on_timeout ( )  [override], [virtual]
```

Cleans up drive system if we time out before finishing

reset the drive system if we don't hit our target

Reimplemented from AutoCommand.

5.62.3.2 run()

```
bool TurnToHeadingCommand::run ( )  [override], [virtual]
```

Run turn_to_heading Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/drive_commands.h
- src/utils/command_structure/drive_commands.cpp

5.63 Vector2D Class Reference

```
#include <vector2d.h>
```

Public Member Functions

- Vector2D (double dir, double mag)
- Vector2D (point_t p)
- double get_dir () const
- double get_mag () const
- double get_x () const
- double get_y () const
- Vector2D normalize ()
- point_t point ()
- Vector2D operator∗ (const double &x)
- Vector2D operator+ (const Vector2D &other)
- Vector2D operator- (const Vector2D &other)

5.63.1 Detailed Description

Vector2D is an x,y pair Used to represent 2D locations on the field. It can also be treated as a direction and magnitude

5.63.2 Constructor & Destructor Documentation

5.63.2.1 Vector2D() [1/2]

```
Vector2D::Vector2D (
            double dir,
            double mag )
```

Construct a vector object.

Parameters

dir	Direction, in radians. 'foward' is 0, clockwise positive when viewed from the top.
mag	Magnitude.

5.63.2.2 Vector2D() [2/2]

```
Vector2D::Vector2D (
            point_t p )
```

Construct a vector object from a cartesian point.

Parameters

p	point_t.x , point_t.y

5.63.3 Member Function Documentation

5.63.3.1 get_dir()

```
double Vector2D::get_dir ( ) const
```

Get the direction of the vector, in radians. '0' is forward, clockwise positive when viewed from the top.

Use r2d() to convert.

Returns

the direction of the vetctor in radians

Get the direction of the vector, in radians. '0' is forward, clockwise positive when viewed from the top.

Use r2d() to convert.

5.63.3.2 get_mag()

```
double Vector2D::get_mag ( ) const
```

Returns

the magnitude of the vector

Get the magnitude of the vector

5.63.3.3 get_x()

```
double Vector2D::get_x ( ) const
```

Returns

the X component of the vector; positive to the right.

Get the X component of the vector; positive to the right.

5.63.3.4 get_y()

```
double Vector2D::get_y ( ) const
```

Returns

the Y component of the vector, positive forward.

Get the Y component of the vector, positive forward.

5.63.3.5 normalize()

`Vector2D Vector2D::normalize ( )`

Changes the magnitude of the vector to 1

Returns

> the normalized vector

Changes the magnetude of the vector to 1

5.63.3.6 operator∗()

```
Vector2D Vector2D::operator* (
            const double & x )
```

Scales a Vector2D by a scalar with the ∗ operator

Parameters

x	the value to scale the vector by

Returns

> the this Vector2D scaled by x

5.63.3.7 operator+()

```
Vector2D Vector2D::operator+ (
            const Vector2D & other )
```

Add the components of two vectors together Vector2D + Vector2D = (this.x + other.x, this.y + other.y)

Parameters

other	the vector to add to this

Returns

> the sum of the vectors

5.63.3.8 operator-()

```
Vector2D Vector2D::operator- (
            const Vector2D & other )
```

Subtract the components of two vectors together Vector2D - Vector2D = (this.x - other.x, this.y - other.y)

Parameters

other	the vector to subtract from this

Returns

the difference of the vectors

5.63.3.9 point()

point_t Vector2D::point ( )

Returns a point from the vector

Returns

the point represented by the vector

Convert a direction and magnitude representation to an x, y representation

Returns

the x, y representation of the vector

The documentation for this class was generated from the following files:

- include/utils/vector2d.h
- src/utils/vector2d.cpp

5.64 WaitUntilCondition Class Reference

Waits until the condition is true.

```
#include <auto_command.h>
```

Inheritance diagram for WaitUntilCondition:

```
┌─────────────────┐
│  AutoCommand    │
└─────────────────┘
        ▲
        │
┌─────────────────┐
│ WaitUntilCondition │
└─────────────────┘
```

Public Member Functions

- **WaitUntilCondition** (Condition ∗cond)
- bool run () override

Public Member Functions inherited from [AutoCommand](#)

- virtual void [on_timeout](#) ()
- [AutoCommand](#) ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from [AutoCommand](#)

- double [timeout_seconds](#) = default_timeout

Static Public Attributes inherited from [AutoCommand](#)

- static constexpr double **default_timeout** = 10.0

5.64.1 Detailed Description

Waits until the condition is true.

5.64.2 Member Function Documentation

5.64.2.1 run()

```
bool WaitUntilCondition::run ( )  [inline], [override], [virtual]
```

Executes the command Overridden by child classes

Returns

true when the command is finished, false otherwise

Reimplemented from [AutoCommand](#).

The documentation for this class was generated from the following file:

- include/utils/command_structure/auto_command.h

5.65 WaitUntilUpToSpeedCommand Class Reference

```
#include <flywheel_commands.h>
```

Inheritance diagram for WaitUntilUpToSpeedCommand:
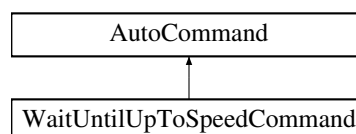
Public Member Functions

- WaitUntilUpToSpeedCommand (Flywheel &flywheel, int threshold_rpm)
- bool run () override

Public Member Functions inherited from AutoCommand

- virtual void on_timeout ()
- AutoCommand ∗ **withTimeout** (double t_seconds)

Additional Inherited Members

Public Attributes inherited from AutoCommand

- double timeout_seconds = default_timeout

Static Public Attributes inherited from AutoCommand

- static constexpr double **default_timeout** = 10.0

5.65.1 Detailed Description

AutoCommand that listens to the Flywheel and waits until it is at its target speed +/- the specified threshold

5.65.2 Constructor & Destructor Documentation

5.65.2.1 WaitUntilUpToSpeedCommand()

```
WaitUntilUpToSpeedCommand::WaitUntilUpToSpeedCommand (
            Flywheel & flywheel,
            int threshold_rpm )
```

Creat a WaitUntilUpToSpeedCommand

Parameters

flywheel	the flywheel system we are commanding
threshold_rpm	the threshold over and under the flywheel target RPM that we define to be acceptable

5.65.3 Member Function Documentation

5.65.3.1 run()

```
bool WaitUntilUpToSpeedCommand::run ( )  [override], [virtual]
```

Run spin_manual Overrides run from AutoCommand

Returns

true when execution is complete, false otherwise

Reimplemented from AutoCommand.

The documentation for this class was generated from the following files:

- include/utils/command_structure/flywheel_commands.h
- src/utils/command_structure/flywheel_commands.cpp

Chapter 6

File Documentation

6.1 robot_specs.h

```
00001 #pragma once
00002 #include "../core/include/utils/pid.h"
00003 #include "../core/include/utils/feedback_base.h"
00004
00011 typedef struct
00012 {
00013   double robot_radius;
00014
00015   double odom_wheel_diam;
00016   double odom_gear_ratio;
00017   double dist_between_wheels;
00018
00019   double drive_correction_cutoff;
00020
00021   Feedback *drive_feedback;
00022   Feedback *turn_feedback;
00023   PID::pid_config_t correction_pid;
00024
00025 } robot_specs_t;
```

6.2 custom_encoder.h

```
00001 #pragma once
00002 #include "vex.h"
00003
00008 class CustomEncoder : public vex::encoder
00009 {
00010   typedef vex::encoder super;
00011
00012   public:
00018   CustomEncoder(vex::triport::port &port, double ticks_per_rev);
00019
00025   void setRotation(double val, vex::rotationUnits units);
00026
00032   void setPosition(double val, vex::rotationUnits units);
00033
00039   double rotation(vex::rotationUnits units);
00040
00046   double position(vex::rotationUnits units);
00047
00053   double velocity(vex::velocityUnits units);
00054
00055
00056   private:
00057   double tick_scalar;
00058 };
```

6.3 flywheel.h

```
00001 #pragma once
00002 /**********************************************************
00003 *
00004 *       File:     Flywheel.h
00005 *       Purpose:  Generalized flywheel class for Core.
00006 *       Author:   Chris Nokes
00007 *
00008 **********************************************************
00009 * EDIT HISTORY
00010 **********************************************************
00011 * 09/23/2022  <CRN> Reorganized, added documentation.
00012 * 09/23/2022  <CRN> Added functions elaborated on in .cpp.
00013 **********************************************************/
00014 #include "../core/include/utils/feedforward.h"
00015 #include "vex.h"
00016 #include "../core/include/robot_specs.h"
00017 #include "../core/include/utils/pid.h"
00018 #include "../core/include/utils/command_structure/auto_command.h"
00019 #include <atomic>
00020
00021 using namespace vex;
00022
00030 class Flywheel
00031 {
00032   enum FlywheelControlStyle
00033   {
00034     PID_Feedforward,
00035     Feedforward,
00036     Take_Back_Half,
00037     Bang_Bang,
00038   };
00039
00040 public:
00041   // CONSTRUCTORS, GETTERS, AND SETTERS
00049   Flywheel(motor_group &motors, PID::pid_config_t &pid_config, FeedForward::ff_config_t &ff_config,
      const double ratio);
00050
00057   Flywheel(motor_group &motors, FeedForward::ff_config_t &ff_config, const double ratio);
00058
00065   Flywheel(motor_group &motors, double tbh_gain, const double ratio);
00066
00072   Flywheel(motor_group &motors, const double ratio);
00073
00078   double getDesiredRPM();
00079
00084   bool isTaskRunning();
00085
00089   motor_group *getMotors();
00090
00094   double measureRPM();
00095
00099   double getRPM();
00103   PID *getPID();
00104
00108   double getPIDValue();
00109
00113   double getFeedforwardValue();
00114
00118   double getTBHGain();
00119
00124   void setPIDTarget(double value);
00125
00130   void updatePID(double value);
00131
00132   // SPINNERS AND STOPPERS
00133
00140   void spin_raw(double speed, directionType dir = fwd);
00141
00148   void spin_manual(double speed, directionType dir = fwd);
00149
00155   void spinRPM(int rpm);
00156
00160   void stop();
00161
00165   void stopMotors();
00166
00170   void stopNonTasks();
00171
00172   AutoCommand *SpinRpmCmd(int rpm)
00173   {
00174
00175     return new FunctionCommand([this]()
00176                               {spinRPM(1000); return true; });
00177   }
00178
```

```
00179    AutoCommand *WaitUntilUpToSpeedCmd()
00180    {
00181      return new WaitUntilCondition(
00182        new FunctionCondition([this]()
00183                            { return RPM == smoothedRPM; }));
00184    }
00185
00186 private:
00187    motor_group &motors;               // motors that make up the flywheel
00188    bool taskRunning = false;          // is the task (thread but not) currently running?
00189    PID pid;                           // PID on the flywheel
00190    FeedForward ff;                    // FF constants for the flywheel
00191    double TBH_gain;                   // TBH gain parameter for the flywheel
00192    double ratio;                      // multiplies the velocity by this value
00193    std::atomic<double> RPM;           // Desired RPM of the flywheel.
00194    task rpmTask;                      // task (thread but not) that handles spinning the wheel at a
       given RPM
00195    FlywheelControlStyle control_style; // how the flywheel should be controlled
00196    double smoothedRPM;
00197    MovingAverage RPM_avger;
00198 };
```

6.4 lift.h

```
00001 #pragma once
00002
00003 #include "vex.h"
00004 #include "../core/include/utils/pid.h"
00005 #include <iostream>
00006 #include <map>
00007 #include <atomic>
00008 #include <vector>
00009
00010 using namespace vex;
00011 using namespace std;
00012
00020 template <typename T>
00021 class Lift
00022 {
00023    public:
00024
00031    struct lift_cfg_t
00032    {
00033      double up_speed, down_speed;
00034      double softstop_up, softstop_down;
00035
00036      PID::pid_config_t lift_pid_cfg;
00037    };
00038
00060    Lift(motor_group &lift_motors, lift_cfg_t &lift_cfg, map<T, double> &setpoint_map, limit
       *homing_switch=NULL)
00061      : lift_motors(lift_motors), cfg(lift_cfg), lift_pid(cfg.lift_pid_cfg), setpoint_map(setpoint_map),
       homing_switch(homing_switch)
00062    {
00063
00064      is_async = true;
00065      setpoint = 0;
00066
00067      // Create a background task that is constantly updating the lift PID, if requested.
00068      // Set once, and forget.
00069      task t([](void* ptr){
00070        Lift &lift = *((Lift*) ptr);
00071
00072        while(true)
00073        {
00074          if(lift.get_async())
00075            lift.hold();
00076
00077          vexDelay(50);
00078        }
00079
00080        return 0;
00081      }, this);
00082
00083    }
00084
00093    void control_continuous(bool up_ctrl, bool down_ctrl)
00094    {
00095      static timer tmr;
00096
00097      double cur_pos = 0;
00098
00099      // Check if there's a hook for a custom sensor. If not, use the motors.
```

```
00100      if(get_sensor == NULL)
00101        cur_pos = lift_motors.position(rev);
00102      else
00103        cur_pos = get_sensor();
00104
00105      if(up_ctrl && cur_pos < cfg.softstop_up)
00106      {
00107        lift_motors.spin(directionType::fwd, cfg.up_speed, volt);
00108        setpoint = cur_pos + .3;
00109
00110        // std::cout << "DEBUG OUT: UP " << setpoint << ", " << tmr.time(sec) << ", " << cfg.down_speed <<
    "\n";
00111
00112        // Disable the PID while going UP.
00113        is_async = false;
00114      } else if(down_ctrl && cur_pos > cfg.softstop_down)
00115      {
00116        // Lower the lift slowly, at a rate defined by down_speed
00117        if(setpoint > cfg.softstop_down)
00118          setpoint = setpoint - (tmr.time(sec) * cfg.down_speed);
00119        // std::cout << "DEBUG OUT: DOWN " << setpoint << ", " << tmr.time(sec) << ", " << cfg.down_speed <<
    "\n";
00120        is_async = true;
00121      } else
00122      {
00123        // Hold the lift at the last setpoint
00124        is_async = true;
00125      }
00126
00127      tmr.reset();
00128    }
00129
00138    void control_manual(bool up_btn, bool down_btn, int volt_up, int volt_down)
00139    {
00140      static bool down_hold = false;
00141      static bool init = true;
00142
00143      // Allow for setting position while still calling this function
00144      if(init || up_btn || down_btn)
00145      {
00146        init = false;
00147        is_async = false;
00148      }
00149
00150      double rev = lift_motors.position(rotationUnits::rev);
00151
00152      if(rev < cfg.softstop_down && down_btn)
00153        down_hold = true;
00154      else if( !down_btn )
00155        down_hold = false;
00156
00157      if(up_btn && rev < cfg.softstop_up)
00158        lift_motors.spin(directionType::fwd, volt_up, voltageUnits::volt);
00159      else if(down_btn && rev > cfg.softstop_down && !down_hold)
00160        lift_motors.spin(directionType::rev, volt_down, voltageUnits::volt);
00161      else
00162        lift_motors.spin(directionType::fwd, 0, voltageUnits::volt);
00163
00164    }
00165
00177    void control_setpoints(bool up_step, bool down_step, vector<T> pos_list)
00178    {
00179      // Make sure inputs are only processed on the rising edge of the button
00180      static bool up_last = up_step, down_last = down_step;
00181
00182      bool up_rising = up_step && !up_last;
00183      bool down_rising = down_step && !down_last;
00184
00185      up_last = up_step;
00186      down_last = down_step;
00187
00188      static int cur_index = 0;
00189
00190      // Avoid an index overflow. Shouldn't happen unless the user changes pos_list between calls.
00191      if(cur_index >= pos_list.size())
00192        cur_index = pos_list.size() - 1;
00193
00194      // Increment or decrement the index of the list, bringing it up or down.
00195      if(up_rising && cur_index < (pos_list.size() - 1))
00196        cur_index++;
00197      else if(down_rising && cur_index > 0)
00198        cur_index--;
00199
00200      // Set the lift to hold the position in the background with the PID loop
00201      set_position(pos_list[cur_index]);
00202      is_async = true;
00203
```

```
00204    }
00205
00214    bool set_position(T pos)
00215    {
00216      this->setpoint = setpoint_map[pos];
00217      is_async = true;
00218
00219      return (lift_pid.get_target() == this->setpoint) && lift_pid.is_on_target();
00220    }
00221
00228    bool set_setpoint(double val)
00229    {
00230      this->setpoint = val;
00231      return (lift_pid.get_target() == this->setpoint) && lift_pid.is_on_target();
00232    }
00233
00237    double get_setpoint()
00238    {
00239      return this->setpoint;
00240    }
00241
00246    void hold()
00247    {
00248      lift_pid.set_target(setpoint);
00249      // std::cout « "DEBUG OUT: SETPOINT " « setpoint « "\n";
00250
00251      if(get_sensor != NULL)
00252        lift_pid.update(get_sensor());
00253      else
00254        lift_pid.update(lift_motors.position(rev));
00255
00256      // std::cout « "DEBUG OUT: ROTATION " « lift_motors.rotation(rev) « "\n\n";
00257
00258      lift_motors.spin(fwd, lift_pid.get(), volt);
00259    }
00260
00265    void home()
00266    {
00267      static timer tmr;
00268      tmr.reset();
00269
00270      while(tmr.time(sec) < 3)
00271      {
00272        lift_motors.spin(directionType::rev, 6, volt);
00273
00274        if (homing_switch == NULL && lift_motors.current(currentUnits::amp) > 1.5)
00275          break;
00276        else if (homing_switch != NULL && homing_switch->pressing())
00277          break;
00278      }
00279
00280      if(reset_sensor != NULL)
00281        reset_sensor();
00282
00283      lift_motors.resetPosition();
00284      lift_motors.stop();
00285
00286    }
00287
00291    bool get_async()
00292    {
00293      return is_async;
00294    }
00295
00301    void set_async(bool val)
00302    {
00303      this->is_async = val;
00304    }
00305
00315    void set_sensor_function(double (*fn_ptr) (void))
00316    {
00317      this->get_sensor = fn_ptr;
00318    }
00319
00326    void set_sensor_reset(void (*fn_ptr) (void))
00327    {
00328      this->reset_sensor = fn_ptr;
00329    }
00330
00331    private:
00332
00333    motor_group &lift_motors;
00334    lift_cfg_t &cfg;
00335    PID lift_pid;
00336    map<T, double> &setpoint_map;
00337    limit *homing_switch;
00338
```

```
00339   atomic<double> setpoint;
00340   atomic<bool> is_async;
00341
00342   double (*get_sensor)(void) = NULL;
00343   void (*reset_sensor)(void) = NULL;
00344
00345
00346 };
```

6.5 mecanum_drive.h

```
00001 #pragma once
00002
00003 #include "vex.h"
00004 #include "../core/include/utils/pid.h"
00005
00006 #ifndef PI
00007 #define PI 3.141592654
00008 #endif
00009
00014 class MecanumDrive
00015 {
00016
00017   public:
00018
00022   struct mecanumdrive_config_t
00023   {
00024     // PID configurations for autonomous driving
00025     PID::pid_config_t drive_pid_conf;
00026     PID::pid_config_t drive_gyro_pid_conf;
00027     PID::pid_config_t turn_pid_conf;
00028
00029     // Diameter of the mecanum wheels
00030     double drive_wheel_diam;
00031
00032     // Diameter of the perpendicular undriven encoder wheel
00033     double lateral_wheel_diam;
00034
00035     // Width between the center of the left and right wheels
00036     double wheelbase_width;
00037
00038   };
00039
00043   MecanumDrive(vex::motor &left_front, vex::motor &right_front, vex::motor &left_rear, vex::motor
      &right_rear,
00044               vex::rotation *lateral_wheel=NULL, vex::inertial *imu=NULL, mecanumdrive_config_t
      *config=NULL);
00045
00054   void drive_raw(double direction_deg, double magnitude, double rotation);
00055
00066   void drive(double left_y, double left_x, double right_x, int power=2);
00067
00080   bool auto_drive(double inches, double direction, double speed, bool gyro_correction=true);
00081
00092   bool auto_turn(double degrees, double speed, bool ignore_imu=false);
00093
00094   private:
00095
00096   vex::motor &left_front, &right_front, &left_rear, &right_rear;
00097
00098   mecanumdrive_config_t *config;
00099   vex::rotation *lateral_wheel;
00100   vex::inertial *imu;
00101
00102   PID *drive_pid = NULL;
00103   PID *drive_gyro_pid = NULL;
00104   PID *turn_pid = NULL;
00105
00106   bool init = true;
00107
00108 };
```

6.6 odometry_3wheel.h

```
00001 #pragma once
00002 #include "../core/include/subsystems/odometry/odometry_base.h"
00003 #include "../core/include/subsystems/tank_drive.h"
00004 #include "../core/include/subsystems/custom_encoder.h"
00005
```

```
00032 class Odometry3Wheel : public OdometryBase
00033 {
00034     public:
00035
00040     typedef struct
00041     {
00042         double wheelbase_dist;
00043         double off_axis_center_dist;
00044         double wheel_diam;
00046     } odometry3wheel_cfg_t;
00047
00057     Odometry3Wheel(CustomEncoder &lside_fwd, CustomEncoder &rside_fwd, CustomEncoder &off_axis,
      odometry3wheel_cfg_t &cfg, bool is_async=true);
00058
00065     pose_t update() override;
00066
00075     void tune(vex::controller &con, TankDrive &drive);
00076
00077     private:
00078
00091     static pose_t calculate_new_pos(double lside_delta_deg, double rside_delta_deg, double
      offax_delta_deg, pose_t old_pos, odometry3wheel_cfg_t cfg);
00092
00093     CustomEncoder &lside_fwd, &rside_fwd, &off_axis;
00094     odometry3wheel_cfg_t &cfg;
00095
00096
00097 };
```

6.7 odometry_base.h

```
00001 #pragma once
00002
00003 #include "vex.h"
00004 #include "../core/include/utils/geometry.h"
00005 #include "../core/include/robot_specs.h"
00006
00007 #ifndef PI
00008 #define PI 3.141592654
00009 #endif
00010
00011
00012
00025 class OdometryBase
00026 {
00027 public:
00028
00034     OdometryBase(bool is_async);
00035
00040     pose_t get_position(void);
00041
00046     virtual void set_position(const pose_t& newpos=zero_pos);
00047
00052     virtual pose_t update() = 0;
00053
00061     static int background_task(void* ptr);
00062
00068     void end_async();
00069
00076     static double pos_diff(pose_t start_pos, pose_t end_pos);
00077
00084     static double rot_diff(pose_t pos1, pose_t pos2);
00085
00094     static double smallest_angle(double start_deg, double end_deg);
00095
00097     bool end_task = false;
00098
00103     double get_speed();
00104
00109     double get_accel();
00110
00115     double get_angular_speed_deg();
00116
00121     double get_angular_accel_deg();
00122
00126     inline static constexpr pose_t zero_pos = {.x=0.0L, .y=0.0L, .rot=90.0L};
00127
00128 protected:
00132     vex::task *handle;
00133
00137     vex::mutex mut;
00138
00142     pose_t current_pos;
```

```
00143
00144     double speed;
00145     double accel;
00146     double ang_speed_deg;
00147     double ang_accel_deg;
00148 };
```

6.8 odometry_tank.h

```
00001 #pragma once
00002
00003 #include "../core/include/subsystems/odometry/odometry_base.h"
00004 #include "../core/include/subsystems/custom_encoder.h"
00005 #include "../core/include/utils/geometry.h"
00006 #include "../core/include/utils/vector2d.h"
00007 #include "../core/include/robot_specs.h"
00008
00009 static int background_task(void* odom_obj);
00010
00011
00018 class OdometryTank : public OdometryBase
00019 {
00020 public:
00029     OdometryTank(vex::motor_group &left_side, vex::motor_group &right_side, robot_specs_t &config,
      vex::inertial *imu=NULL, bool is_async=true);
00030
00040     OdometryTank(CustomEncoder &left_custom_enc, CustomEncoder &right_custom_enc, robot_specs_t
      &config, vex::inertial *imu=NULL, bool is_async=true);
00041
00051     OdometryTank(vex::encoder &left_vex_enc, vex::encoder &right_vex_enc, robot_specs_t &config,
      vex::inertial *imu=NULL, bool is_async=true);
00052
00057     pose_t update() override;
00058
00063     void set_position(const pose_t &newpos=zero_pos) override;
00064
00065
00066
00067 private:
00071     static pose_t calculate_new_pos(robot_specs_t &config, pose_t &stored_info, double lside_diff,
      double rside_diff, double angle_deg);
00072
00073     vex::motor_group *left_side, *right_side;
00074     CustomEncoder *left_custom_enc, *right_custom_enc;
00075     vex::encoder *left_vex_enc, *right_vex_enc;
00076     vex::inertial *imu;
00077     robot_specs_t &config;
00078
00079     double rotation_offset = 0;
00080
00081 };
```

6.9 screen.h

```
00001 #pragma once
00002 #include "vex.h"
00003 #include <vector>
00004 #include <functional>
00005 #include <map>
00006 #include "../core/include/subsystems/odometry/odometry_base.h"
00007
00008 namespace screen
00009 {
00011     class Page
00012     {
00013     public:
00022         virtual void update(bool was_pressed, int x, int y);
00030         virtual void draw(vex::brain::lcd &screen, bool first_draw,
00031                           unsigned int frame_number);
00032     };
00033
00040     void start_screen(vex::brain::lcd &screen, std::vector<Page *> pages, int first_page = 0);
00041
00042     void stop_screen();
00043
00045     using update_func_t = std::function<void(bool, int, int)>;
00046
00048     using draw_func_t = std::function<void(vex::brain::lcd &screen, bool, unsigned int)>;
00049
```

```
00050     class StatsPage : public Page
00051     {
00052     public:
00053         StatsPage(std::map<std::string, vex::motor &> motors);
00054         void update(bool was_pressed, int x, int y) override;
00055         void draw(vex::brain::lcd &, bool first_draw, unsigned int frame_number) override;
00056
00057     private:
00058         void draw_motor_stats(const std::string &name, vex::motor &mot, unsigned int frame, int x, int
     y, vex::brain::lcd &scr);
00059
00060         std::map<std::string, vex::motor &> motors;
00061         static const int y_start = 0;
00062         static const int per_column = 4;
00063         static const int row_height = 20;
00064         static const int row_width = 200;
00065     };
00066
00070     class OdometryPage : public Page
00071     {
00072     public:
00073         OdometryPage(OdometryBase &odom, double width, double height, bool do_trail);
00074         void update(bool was_pressed, int x, int y) override;
00075         void draw(vex::brain::lcd &, bool first_draw, unsigned int frame_number) override;
00076
00077     private:
00078         static const int path_len = 40;
00079         static constexpr char const *field_filename = "vex_field_240p.png";
00080
00081         OdometryBase &odom;
00082         double width;
00083         double height;
00084         uint8_t *buf = nullptr;
00085         int buf_size = 0;
00086         pose_t path[path_len];
00087         int path_index = 0;
00088         bool do_trail;
00089     };
00090
00092     class FunctionPage : public Page
00093     {
00094     public:
00095         FunctionPage(update_func_t update_f, draw_func_t draw_t);
00096
00097         void update(bool was_pressed, int x, int y) override;
00098         void draw(vex::brain::lcd &, bool first_draw, unsigned int frame_number) override;
00099
00100     private:
00101         update_func_t update_f;
00102         draw_func_t draw_f;
00103     };
00104
00105 }
```

6.10 tank_drive.h

```
00001 #pragma once
00002
00003 #ifndef PI
00004 #define PI 3.141592654
00005 #endif
00006
00007 #include "vex.h"
00008 #include "../core/include/subsystems/odometry/odometry_tank.h"
00009 #include "../core/include/utils/pid.h"
00010 #include "../core/include/utils/feedback_base.h"
00011 #include "../core/include/robot_specs.h"
00012 #include "../core/include/utils/pure_pursuit.h"
00013 #include "../core/include/utils/command_structure/auto_command.h"
00014 #include <vector>
00015
00016 using namespace vex;
00017
00022 class TankDrive
00023 {
00024 public:
00032     TankDrive(motor_group &left_motors, motor_group &right_motors, robot_specs_t &config, OdometryBase
     *odom = NULL);
00033
00034     AutoCommand *DriveToPointCmd(point_t pt, vex::directionType dir = vex::forward, double max_speed =
     1.0);
00035     AutoCommand *DriveToPointCmd(Feedback &fb, point_t pt, vex::directionType dir = vex::forward, double
     max_speed = 1.0);
```

```
00036
00037   AutoCommand *DriveForwardCmd(double dist, vex::directionType dir = vex::forward, double max_speed =
     1.0);
00038   AutoCommand *DriveForwardCmd(Feedback &fb, double dist, vex::directionType dir = vex::forward,
     double max_speed = 1.0);
00039
00040   AutoCommand *TurnToHeadingCmd(double heading, double max_speed = 1.0);
00041   AutoCommand *TurnToHeadingCmd(Feedback &fb, double heading, double max_speed = 1.0);
00042
00043   AutoCommand *TurnDegreesCmd(double degrees, double max_speed = 1.0);
00044   AutoCommand *TurnDegreesCmd(Feedback &fb, double degrees, double max_speed = 1.0);
00045
00046   AutoCommand *PurePursuitCmd(std::vector<point_t> path, directionType dir, double radius, double
     max_speed=1);
00047   AutoCommand *PurePursuitCmd(Feedback &feedback, std::vector<point_t> path, directionType dir, double
     radius, double max_speed=1);
00048
00052   void stop();
00053
00064   void drive_tank(double left, double right, int power=1);
00065
00076   void drive_arcade(double forward_back, double left_right, int power = 1);
00077
00088   bool drive_forward(double inches, directionType dir, Feedback &feedback, double max_speed = 1);
00089
00098   bool drive_forward(double inches, directionType dir, double max_speed = 1);
00099
00110   bool turn_degrees(double degrees, Feedback &feedback, double max_speed = 1);
00111
00121   bool turn_degrees(double degrees, double max_speed = 1);
00122
00134   bool drive_to_point(double x, double y, vex::directionType dir, Feedback &feedback, double max_speed
     = 1);
00135
00147   bool drive_to_point(double x, double y, vex::directionType dir, double max_speed = 1);
00148
00157   bool turn_to_heading(double heading_deg, Feedback &feedback, double max_speed = 1);
00165   bool turn_to_heading(double heading_deg, double max_speed = 1);
00166
00170   void reset_auto();
00171
00180   static double modify_inputs(double input, int power = 2);
00181
00194   bool pure_pursuit(std::vector<point_t> path, directionType dir, double radius, Feedback &feedback,
     double max_speed=1);
00195
00209   bool pure_pursuit(std::vector<point_t> path, directionType dir, double radius, double max_speed=1);
00210
00211 private:
00212   motor_group &left_motors;
00213   motor_group &right_motors;
00214
00215   PID correction_pid;
00216   Feedback *drive_default_feedback = NULL;
00217   Feedback *turn_default_feedback = NULL;
00218
00219   OdometryBase *odometry;
00220
00221   robot_specs_t &config;
00222
00223   bool func_initialized = false;
00224   bool is_pure_pursuit = false;
00225 };
```

6.11 auto_chooser.h

```
00001 #pragma once
00002 #include "vex.h"
00003 #include <string>
00004 #include <vector>
00005
00006
00015 class AutoChooser
00016 {
00017   public:
00023   AutoChooser(vex::brain &brain);
00024
00029   void add(std::string name);
00030
00035   std::string get_choice();
00036
00037   protected:
00038
```

```
00042   struct entry_t
00043   {
00044     int x;
00045     int y;
00046     int width;
00047     int height;
00048     std::string name;
00049   };
00050
00051   void render(entry_t *selected);
00052
00053   std::string choice;
00054   std::vector<entry_t> list ;
00055   vex::brain &brain;
00058 };
```

6.12   auto_command.h

```
00001
00007 #pragma once
00008
00009 #include "vex.h"
00010 #include <functional>
00011 #include <vector>
00012 #include <queue>
00013 #include <atomic>
00014
00015 class AutoCommand
00016 {
00017 public:
00018   static constexpr double default_timeout = 10.0;
00024   virtual bool run() { return true; }
00028   virtual void on_timeout() {}
00029   AutoCommand *withTimeout(double t_seconds)
00030   {
00031     if (this->timeout_seconds < 0)
00032     {
00033       // should never be timed out
00034       return this;
00035     }
00036     this->timeout_seconds = t_seconds;
00037     return this;
00038   }
00048   double timeout_seconds = default_timeout;
00049 };
00050
00055 class FunctionCommand : public AutoCommand
00056 {
00057 public:
00058   FunctionCommand(std::function<bool(void)> f) : f(f) {}
00059   bool run()
00060   {
00061     return f();
00062   }
00063
00064 private:
00065   std::function<bool(void)> f;
00066 };
00067
00077 class Condition
00078 {
00079 public:
00080   virtual bool test() = 0;
00081 };
00082
00084 class FunctionCondition : public Condition
00085 {
00086 public:
00087   FunctionCondition(
00088       std::function<bool()> cond, std::function<void(void)> timeout = []() {}) : cond(cond),
      timeout(timeout)
00089   {
00090   }
00091   bool test() override;
00092
00093 private:
00094   std::function<bool()> cond;
00095   std::function<void(void)> timeout;
00096 };
00097
00099 class IfTimePassed : public Condition
00100 {
00101 public:
```

```
00102    IfTimePassed(double time_s);
00103    bool test() override;
00104
00105 private:
00106    double time_s;
00107    vex::timer tmr;
00108 };
00109
00111 class WaitUntilCondition : public AutoCommand
00112 {
00113 public:
00114    WaitUntilCondition(Condition *cond) : cond(cond) {}
00115    bool run() override
00116    {
00117      return cond->test();
00118    }
00119
00120 private:
00121    Condition *cond;
00122 };
00123
00126 class InOrder : public AutoCommand
00127 {
00128 public:
00129    InOrder(std::queue<AutoCommand *> cmds);
00130    InOrder(std::initializer_list<AutoCommand *> cmds);
00131    bool run() override;
00132    void on_timeout() override;
00133
00134 private:
00135    AutoCommand *current_command = nullptr;
00136    std::queue<AutoCommand *> cmds;
00137    vex::timer tmr;
00138 };
00139
00142 class Parallel : public AutoCommand
00143 {
00144 public:
00145    Parallel(std::initializer_list<AutoCommand *> cmds);
00146    bool run() override;
00147    void on_timeout() override;
00148
00149 private:
00150    std::vector<AutoCommand *> cmds;
00151    std::vector<vex::task *> runners;
00152 };
00153
00157 class Branch : public AutoCommand
00158 {
00159 public:
00160    Branch(Condition *cond, AutoCommand *false_choice, AutoCommand *true_choice);
00161    ~Branch();
00162    bool run() override;
00163    void on_timeout() override;
00164
00165 private:
00166    AutoCommand *false_choice;
00167    AutoCommand *true_choice;
00168    Condition *cond;
00169    bool choice = false;
00170    bool chosen = false;
00171    vex::timer tmr;
00172 };
00173
00177 class Async : public AutoCommand
00178 {
00179 public:
00180    Async(AutoCommand *cmd) : cmd(cmd) {}
00181    bool run() override;
00182
00183 private:
00184    AutoCommand *cmd = nullptr;
00185 };
```

6.13 command_controller.h

```
00001
00010 #pragma once
00011 #include <vector>
00012 #include <queue>
00013 #include "../core/include/utils/command_structure/auto_command.h"
00014
00015 class CommandController
```

```
00016 {
00017 public:
00019   [[deprecated("Use list constructor instead.")]] CommandController() : command_queue({}) {}
00020
00023   CommandController(std::initializer_list<AutoCommand *> cmds) : command_queue(cmds) {}
00029   [[deprecated("Use list constructor instead. If you need to make a decision before adding new
      commands, use Branch (https://github.com/RIT-VEX-U/Core/wiki/3-%7C-Utilites#commandcontroller)")]]
      void add(std::vector<AutoCommand *> cmds);
00030   void add(AutoCommand *cmd, double timeout_seconds = 10.0);
00031
00042   [[deprecated("Use list constructor instead. If you need to make a decision before adding new
      commands, use Branch (https://github.com/RIT-VEX-U/Core/wiki/3-%7C-Utilites#commandcontroller)")]]
      void
00043   add(std::vector<AutoCommand *> cmds, double timeout_sec);
00050   void add_delay(int ms);
00051
00054   void add_cancel_func(std::function<bool(void)> true_if_cancel);
00055
00060   void run();
00061
00067   bool last_command_timed_out();
00068
00069 private:
00070   std::queue<AutoCommand *> command_queue;
00071   bool command_timed_out = false;
00072   std::function<bool()> should_cancel = []()
00073   { return false; };
00074 };
```

6.14   delay_command.h

```
00001
00008 #pragma once
00009
00010 #include "../core/include/utils/command_structure/auto_command.h"
00011
00012 class DelayCommand: public AutoCommand {
00013   public:
00018     DelayCommand(int ms): ms(ms) {}
00019
00025     bool run() override {
00026       vexDelay(ms);
00027       return true;
00028     }
00029
00030   private:
00031     // amount of milliseconds to wait
00032     int ms;
00033 };
```

6.15   drive_commands.h

```
00001
00019 #pragma once
00020
00021 #include "vex.h"
00022 #include "../core/include/utils/geometry.h"
00023 #include "../core/include/utils/command_structure/auto_command.h"
00024 #include "../core/include/subsystems/tank_drive.h"
00025
00026 using namespace vex;
00027
00028
00029 // ==== DRIVING ====
00030
00036 class DriveForwardCommand: public AutoCommand
00037 {
00038   public:
00039     DriveForwardCommand(TankDrive &drive_sys, Feedback &feedback, double inches, directionType dir,
      double max_speed=1);
00040
00046     bool run() override;
00050     void on_timeout() override;
00051
00052   private:
00053     // drive system to run the function on
00054     TankDrive &drive_sys;
00055
00056     // feedback controller to use
```

```
00057      Feedback &feedback;
00058
00059      // parameters for drive_forward
00060      double inches;
00061      directionType dir;
00062      double max_speed;
00063 };
00064
00069 class TurnDegreesCommand: public AutoCommand
00070 {
00071   public:
00072     TurnDegreesCommand(TankDrive &drive_sys, Feedback &feedback, double degrees, double max_speed =
      1);
00073
00079     bool run() override;
00083     void on_timeout() override;
00084
00085
00086   private:
00087     // drive system to run the function on
00088     TankDrive &drive_sys;
00089
00090     // feedback controller to use
00091     Feedback &feedback;
00092
00093     // parameters for turn_degrees
00094     double degrees;
00095     double max_speed;
00096 };
00097
00102 class DriveToPointCommand: public AutoCommand
00103 {
00104   public:
00105     DriveToPointCommand(TankDrive &drive_sys, Feedback &feedback, double x, double y, directionType
      dir, double max_speed = 1);
00106     DriveToPointCommand(TankDrive &drive_sys, Feedback &feedback, point_t point, directionType dir,
      double max_speed=1);
00107
00113     bool run() override;
00114
00115   private:
00116     // drive system to run the function on
00117     TankDrive &drive_sys;
00118
00122     void on_timeout() override;
00123
00124
00125     // feedback controller to use
00126     Feedback &feedback;
00127
00128     // parameters for drive_to_point
00129     double x;
00130     double y;
00131     directionType dir;
00132     double max_speed;
00133
00134 };
00135
00141 class TurnToHeadingCommand: public AutoCommand
00142 {
00143   public:
00144     TurnToHeadingCommand(TankDrive &drive_sys, Feedback &feedback, double heading_deg, double speed =
      1);
00145
00151     bool run() override;
00155     void on_timeout() override;
00156
00157
00158   private:
00159     // drive system to run the function on
00160     TankDrive &drive_sys;
00161
00162     // feedback controller to use
00163     Feedback &feedback;
00164
00165     // parameters for turn_to_heading
00166     double heading_deg;
00167     double max_speed;
00168 };
00169
00173 class PurePursuitCommand: public AutoCommand
00174 {
00175   public:
00185   PurePursuitCommand(TankDrive &drive_sys, Feedback &feedback, std::vector<point_t> path,
      directionType dir, double radius, double max_speed=1);
00186
00190   bool run() override;
```

```
00191
00195   void on_timeout() override;
00196
00197   private:
00198   TankDrive &drive_sys;
00199   std::vector<point_t> path;
00200   directionType dir;
00201   double radius;
00202   Feedback &feedback;
00203   double max_speed;
00204
00205 };
00206
00211 class DriveStopCommand: public AutoCommand
00212 {
00213   public:
00214     DriveStopCommand(TankDrive &drive_sys);
00215
00221     bool run() override;
00222     void on_timeout() override;
00223
00224   private:
00225     // drive system to run the function on
00226     TankDrive &drive_sys;
00227 };
00228
00229
00230 // ==== ODOMETRY ====
00231
00236 class OdomSetPosition: public AutoCommand
00237 {
00238   public:
00244     OdomSetPosition(OdometryBase &odom, const pose_t &newpos=OdometryBase::zero_pos);
00245
00251     bool run() override;
00252
00253   private:
00254     // drive system with an odometry config
00255     OdometryBase &odom;
00256     pose_t newpos;
00257 };
```

6.16 flywheel_commands.h

```
00001
00007 #pragma once
00008
00009 #include "../core/include/subsystems/flywheel.h"
00010 #include "../core/include/utils/command_structure/auto_command.h"
00011
00017 class SpinRPMCommand: public AutoCommand {
00018   public:
00024     SpinRPMCommand(Flywheel &flywheel, int rpm);
00025
00031     bool run() override;
00032
00033   private:
00034     // Flywheel instance to run the function on
00035     Flywheel &flywheel;
00036
00037     // parameters for spinRPM
00038     int rpm;
00039 };
00040
00045 class WaitUntilUpToSpeedCommand: public AutoCommand {
00046   public:
00052     WaitUntilUpToSpeedCommand(Flywheel &flywheel, int threshold_rpm);
00053
00059     bool run() override;
00060
00061   private:
00062     // Flywheel instance to run the function on
00063     Flywheel &flywheel;
00064
00065     // if the actual speed is equal to the desired speed +/- this value, we are ready to fire
00066     int threshold_rpm;
00067 };
00068
00074 class FlywheelStopCommand: public AutoCommand {
00075   public:
00080     FlywheelStopCommand(Flywheel &flywheel);
00081
00087     bool run() override;
```

```
00088
00089   private:
00090     // Flywheel instance to run the function on
00091     Flywheel &flywheel;
00092 };
00093
00099 class FlywheelStopMotorsCommand: public AutoCommand {
00100   public:
00105   FlywheelStopMotorsCommand(Flywheel &flywheel);
00106
00112     bool run() override;
00113
00114   private:
00115     // Flywheel instance to run the function on
00116     Flywheel &flywheel;
00117 };
00118
00124 class FlywheelStopNonTasksCommand: public AutoCommand {
00125   FlywheelStopNonTasksCommand(Flywheel &flywheel);
00126
00132     bool run() override;
00133
00134   private:
00135     // Flywheel instance to run the function on
00136     Flywheel &flywheel;
00137 };
```

6.17 feedback_base.h

```
00001 #pragma once
00002
00010 class Feedback
00011 {
00012 public:
00013     enum FeedbackType
00014     {
00015         PIDType,
00016         FeedforwardType,
00017         OtherType,
00018     };
00019
00026     virtual void init(double start_pt, double set_pt) = 0;
00027
00034     virtual double update(double val) = 0;
00035
00039     virtual double get() = 0;
00040
00047     virtual void set_limits(double lower, double upper) = 0;
00048
00052     virtual bool is_on_target() = 0;
00053
00054     virtual Feedback::FeedbackType get_type()
00055     {
00056         return FeedbackType::OtherType;
00057     }
00058 };
```

6.18 feedforward.h

```
00001 #pragma once
00002
00003 #include <math.h>
00004 #include <vector>
00005 #include "../core/include/utils/math_util.h"
00006 #include "../core/include/utils/moving_average.h"
00007 #include "vex.h"
00008
00029 class FeedForward
00030 {
00031     public:
00032
00041     typedef struct
00042     {
00043         double kS;
00044         double kV;
00045         double kA;
00046         double kG;
00047     } ff_config_t;
00048
```

```
00049
00054     FeedForward(ff_config_t &cfg) : cfg(cfg) {}
00055
00066     double calculate(double v, double a, double pid_ref=0.0)
00067     {
00068         double ks_sign = 0;
00069         if(v != 0)
00070             ks_sign = sign(v);
00071         else if(pid_ref != 0)
00072             ks_sign = sign(pid_ref);
00073
00074         return (cfg.kS * ks_sign) + (cfg.kV * v) + (cfg.kA * a) + cfg.kG;
00075     }
00076
00077     private:
00078
00079     ff_config_t &cfg;
00080
00081 };
00082
00083
00091 FeedForward::ff_config_t tune_feedforward(vex::motor_group &motor, double pct, double duration);
```

6.19 generic_auto.h

```
00001 #pragma once
00002
00003 #include <queue>
00004 #include <map>
00005 #include "vex.h"
00006 #include <functional>
00007
00008 typedef std::function<bool(void)> state_ptr;
00009
00014 class GenericAuto
00015 {
00016   public:
00017
00031   [[deprecated("Use CommandController instead.")]]
00032   bool run(bool blocking);
00033
00038   [[deprecated("Use CommandController instead.")]]
00039   void add(state_ptr new_state);
00040
00045   [[deprecated("Use CommandController instead.")]]
00046   void add_async(state_ptr async_state);
00047
00052   [[deprecated("Use CommandController instead.")]]
00053   void add_delay(int ms);
00054
00055   private:
00056
00057   std::queue<state_ptr> state_list;
00058
00059 };
```

6.20 geometry.h

```
00001 #pragma once
00002 #include <cmath>
00003
00007 struct point_t
00008 {
00009     double x;
00010     double y;
00011
00017     double dist(const point_t other) const
00018     {
00019         return std::sqrt(std::pow(this->x - other.x, 2) + pow(this->y - other.y, 2));
00020     }
00021
00027     point_t operator+(const point_t &other)
00028     {
00029         point_t p{
00030             .x = this->x + other.x,
00031             .y = this->y + other.y};
00032         return p;
00033     }
00034
```

```
00040     point_t operator-(const point_t &other)
00041     {
00042         point_t p{
00043             .x = this->x - other.x,
00044             .y = this->y - other.y};
00045         return p;
00046     }
00047
00048     point_t operator*(double s) const
00049     {
00050         return {x * s, y * s};
00051     }
00052     point_t operator/(double s) const
00053     {
00054         return {x / s, y / s};
00055     }
00056
00057     point_t operator-() const
00058     {
00059         return {-x, -y};
00060     }
00061     point_t operator+() const
00062     {
00063         return {x, y};
00064     }
00065
00066     bool operator==(const point_t &rhs)
00067     {
00068         return x == rhs.x && y == rhs.y;
00069     }
00070 };
00071
00075 typedef struct
00076 {
00077     double x;
00078     double y;
00079     double rot;
00080
00081     point_t get_point()
00082     {
00083         return point_t{.x = x, .y = y};
00084     }
00085
00086 } pose_t;
00087
00088 struct Mat2
00089 {
00090     double X11, X12;
00091     double X21, X22;
00092     point_t operator*(const point_t p) const
00093     {
00094         double outx = p.x * X11 + p.y * X12;
00095         double outy = p.x * X21 + p.y * X22;
00096         return {outx, outy};
00097     }
00098
00099     static Mat2 FromRotationDegrees(double degrees)
00100     {
00101         double rad = degrees * (M_PI / 180.0);
00102         double c = cos(rad);
00103         double s = sin(rad);
00104         return {c, -s, s, c};
00105     }
00106 };
```

6.21 graph_drawer.h

```
00001 #pragma once
00002
00003 #include <string>
00004 #include <stdio.h>
00005 #include <vector>
00006 #include <cmath>
00007 #include "vex.h"
00008 #include "../core/include/utils/geometry.h"
00009 #include "../core/include/utils/vector2d.h"
00010
00011 class GraphDrawer
00012 {
00013 public:
00025   GraphDrawer(vex::brain::lcd &screen, int num_samples, std::string x_label, std::string y_label,
00026   vex::color col, bool draw_border, double lower_bound, double upper_bound);
00030   void add_sample(point_t sample);
```

```
00038   void draw(int x, int y, int width, int height);
00039
00040 private:
00041   vex::brain::lcd &Screen;
00042   std::vector<point_t> samples;
00043   int sample_index = 0;
00044   std::string xlabel;
00045   std::string ylabel;
00046   vex::color col = vex::red;
00047   vex::color bgcol = vex::transparent;
00048   bool border;
00049   double upper;
00050   double lower;
00051 };
```

6.22 logger.h

```
00001 #pragma once
00002
00003 #include <cstdarg>
00004 #include <cstdio>
00005 #include <string>
00006 #include "vex.h"
00007
00009 enum LogLevel
00010 {
00011     DEBUG,
00012     NOTICE,
00013     WARNING,
00014     ERROR,
00015     CRITICAL,
00016     TIME
00017 };
00018
00020 class Logger
00021 {
00022 private:
00023     const std::string filename;
00024     vex::brain::sdcard sd;
00025     void write_level(LogLevel l);
00026
00027 public:
00029     const int MAX_FORMAT_LEN = 512;
00032     explicit Logger(const std::string &filename);
00033
00035     Logger(const Logger &l) = delete;
00037     Logger &operator=(const Logger &l) = delete;
00038
00039
00042     void Log(const std::string &s);
00043
00047     void Log(LogLevel level, const std::string &s);
00048
00051     void Logln(const std::string &s);
00052
00056     void Logln(LogLevel level, const std::string &s);
00057
00061     void Logf(const char *fmt, ...);
00062
00067     void Logf(LogLevel level, const char *fmt, ...);
00068 };
```

6.23 math_util.h

```
00001 #pragma once
00002 #include <vector>
00003 #include "math.h"
00004 #include "vex.h"
00005 #include "../core/include/utils/geometry.h"
00006
00007
00015 double clamp(double value, double low, double high);
00016
00023 double sign(double x);
00024
00025 double wrap_angle_deg(double input);
00026 double wrap_angle_rad(double input);
00027
00028 /*
```

```
00029 Calculates the variance of  a set of numbers (needed for linear regression)
00030 https://en.wikipedia.org/wiki/Variance
00031 @param values   the values for which the variance is taken
00032 @param mean     the average of values
00033 */
00034 double variance(std::vector<double> const &values, double mean);
00035
00036
00037 /*
00038 Calculates the average of a vector of doubles
00039 @param values   the list of values for which the average is taken
00040 */
00041 double mean(std::vector<double> const &values);
00042
00043 /*
00044 Calculates the covariance of a set of points (needed for linear regression)
00045 https://en.wikipedia.org/wiki/Covariance
00046
00047 @param points   the points for which the covariance is taken
00048 @param meanx    the mean value of all x coordinates in points
00049 @param meany    the mean value of all y coordinates in points
00050 */
00051 double covariance(std::vector<std::pair<double, double» const &points, double meanx, double meany);
00052
00053 /*
00054 Calculates the slope and y intercept of the line of best fit for the data
00055 @param points the points for the data
00056 */
00057 std::pair<double, double> calculate_linear_regression(std::vector<std::pair<double, double» const
      &points);
00058
00059 double estimate_path_length(const std::vector<point_t> &points);
```

6.24 **motion_controller.h**

```
00001 #pragma once
00002 #include "../core/include/utils/pid.h"
00003 #include "../core/include/utils/feedforward.h"
00004 #include "../core/include/utils/trapezoid_profile.h"
00005 #include "../core/include/utils/feedback_base.h"
00006 #include "../core/include/subsystems/tank_drive.h"
00007 #include "vex.h"
00008
00025 class MotionController : public Feedback
00026 {
00027     public:
00028
00034     typedef struct
00035     {
00036         double max_v;
00037         double accel;
00038         PID::pid_config_t pid_cfg;
00039         FeedForward::ff_config_t ff_cfg;
00040     } m_profile_cfg_t;
00041
00051     MotionController(m_profile_cfg_t &config);
00052
00057     void init(double start_pt, double end_pt) override;
00058
00065     double update(double sensor_val) override;
00066
00070     double get() override;
00071
00079     void set_limits(double lower, double upper) override;
00080
00085     bool is_on_target() override;
00086
00090     motion_t get_motion();
00091
00110     static FeedForward::ff_config_t tune_feedforward(TankDrive &drive, OdometryTank &odometry, double
      pct=0.6, double duration=2);
00111
00112     private:
00113
00114     m_profile_cfg_t config;
00115
00116     PID pid;
00117     FeedForward ff;
00118     TrapezoidProfile profile;
00119
00120     double lower_limit = 0, upper_limit = 0;
00121     double out = 0;
00122     motion_t cur_motion;
```

```
00123
00124     vex::timer tmr;
00125
00126 };
```

6.25 moving_average.h

```
00001 #pragma once
00002 #include <vector>
00003
00016 class MovingAverage {
00017   public:
00018   /*
00019    * Create a moving average calculator with 0 as the default value
00020    *
00021    * @param buffer_size   The size of the buffer. The number of samples that constitute a valid
       reading
00022    */
00023   MovingAverage(int buffer_size);
00024   /*
00025    * Create a moving average calculator with a specified default value
00026    * @param buffer_size   The size of the buffer. The number of samples that constitute a valid
       reading
00027    * @param starting_value The value that the average will be before any data is added
00028    */
00029   MovingAverage(int buffer_size, double starting_value);
00030
00031   /*
00032   * Add a reading to the buffer
00033   * Before:
00034   * [ 1 1 2 2 3 3] => 2
00035   *   ^
00036   * After:
00037   * [ 2 1 2 2 3 3] => 2.16
00038   *     ^
00039   * @param n  the sample that will be added to the moving average.
00040   */
00041   void add_entry(double n);
00042
00047   double get_average();
00048
00053   int get_size();
00054
00055
00056   private:
00057     int buffer_index;              //index of the next value to be overridden
00058     std::vector<double> buffer;    //all current data readings we've taken
00059     double current_avg;            //the current value of the data
00060
00061 };
```

6.26 pid.h

```
00001 #pragma once
00002
00003 #include <cmath>
00004 #include "vex.h"
00005 #include "../core/include/utils/feedback_base.h"
00006
00007 using namespace vex;
00008
00023 class PID : public Feedback
00024 {
00025 public:
00029   enum ERROR_TYPE{
00030     LINEAR,
00031     ANGULAR // assumes degrees
00032   };
00040   struct pid_config_t
00041   {
00042     double p;
00043     double i;
00044     double d;
00045     double deadband;
00046     double on_target_time;
00047     ERROR_TYPE error_method;
00048   };
00049
00050
```

```
00051
00056    PID(pid_config_t &config);
00057
00058
00067    void init(double start_pt, double set_pt) override;
00068
00075    double update(double sensor_val) override;
00076
00081    double get() override;
00082
00089    void set_limits(double lower, double upper) override;
00090
00095    bool is_on_target() override;
00096
00100    void reset();
00101
00106    double get_error();
00107
00112    double get_target();
00113
00118    void set_target(double target);
00119
00120    Feedback::FeedbackType get_type() override;
00121
00122    pid_config_t &config;
00123
00124  private:
00125
00126
00127    double last_error = 0;
00128    double accum_error = 0;
00129
00130    double last_time = 0;
00131    double on_target_last_time = 0;
00132
00133    double lower_limit = 0;
00134    double upper_limit = 0;
00135
00136    double target = 0;
00137    double sensor_val = 0;
00138    double out = 0;
00139
00140    bool is_checking_on_target = false;
00141
00142    timer pid_timer;
00143  };
```

6.27 pidff.h

```
00001  #pragma once
00002  #include "../core/include/utils/feedback_base.h"
00003  #include "../core/include/utils/pid.h"
00004  #include "../core/include/utils/feedforward.h"
00005
00006  class PIDFF : public Feedback
00007  {
00008      public:
00009
00010      PIDFF(PID::pid_config_t &pid_cfg, FeedForward::ff_config_t &ff_cfg);
00011
00018      void init(double start_pt, double set_pt) override;
00019
00024      void set_target(double set_pt);
00025
00033      double update(double val) override;
00034
00043      double update(double val, double vel_setpt, double a_setpt=0);
00044
00048      double get() override;
00049
00056      void set_limits(double lower, double upper) override;
00057
00061      bool is_on_target() override;
00062
00063      PID pid;
00064
00065
00066      private:
00067
00068      FeedForward::ff_config_t &ff_cfg;
00069
00070      FeedForward ff;
00071
```

```
00072     double out;
00073     double lower_lim, upper_lim;
00074
00075 };
```

6.28 pure_pursuit.h

```
00001 #pragma once
00002
00003 #include <vector>
00004 #include "../core/include/utils/geometry.h"
00005 #include "../core/include/utils/vector2d.h"
00006 #include "vex.h"
00007
00008 using namespace vex;
00009
00010 namespace PurePursuit {
00015   struct spline
00016   {
00017     double a, b, c, d, x_start, x_end;
00018
00019     double getY(double x) {
00020       return a * pow((x - x_start), 3) + b * pow((x - x_start), 2) + c * (x - x_start) + d;
00021     }
00022   };
00027   struct hermite_point
00028   {
00029     double x;
00030     double y;
00031     double dir;
00032     double mag;
00033
00034     point_t getPoint() const {
00035       return {x, y};
00036     }
00037
00038     Vector2D getTangent() const {
00039       return Vector2D(dir, mag);
00040     }
00041   };
00042
00047   extern std::vector<point_t> line_circle_intersections(point_t center, double r, point_t point1,
      point_t point2);
00051   extern point_t get_lookahead(const std::vector<point_t> &path, pose_t robot_loc, double radius);
00052
00056   extern std::vector<point_t> inject_path(const std::vector<point_t> &path, double spacing);
00057
00069   extern std::vector<point_t> smooth_path(const std::vector<point_t> &path, double weight_data, double
      weight_smooth, double tolerance);
00070
00071   extern std::vector<point_t> smooth_path_cubic(const std::vector<point_t> &path, double res);
00072
00081   extern std::vector<point_t> smooth_path_hermite(const std::vector<hermite_point> &path, double
      step);
00082
00093   extern double estimate_remaining_dist(const std::vector<point_t> &path, pose_t robot_pose, double
      radius);
00094
00095 }
```

6.29 serializer.h

```
00001 #pragma once
00002 #include <algorithm>
00003 #include <map>
00004 #include <string>
00005 #include <vector>
00006 #include <stdio.h>
00007
00009 const char serialization_separator = '$';
00011 const std::size_t MAX_FILE_SIZE = 4096;
00012
00014 class Serializer
00015 {
00016 private:
00017     bool flush_always;
00018     std::string filename;
00019     std::map<std::string, int> ints;
00020     std::map<std::string, bool> bools;
```

```
00021    std::map<std::string, double> doubles;
00022    std::map<std::string, std::string> strings;
00023
00025    bool read_from_disk();
00026
00027 public:
00029    ~Serializer()
00030    {
00031        save_to_disk();
00032        printf("Saving %s\n", filename.c_str());
00033        fflush(stdout);
00034    }
00035
00039    explicit Serializer(const std::string &filename, bool flush_always = true) :
     flush_always(flush_always), filename(filename), ints({}), bools({}), doubles({}), strings({}) {
     read_from_disk(); }
00040
00042    void save_to_disk() const;
00043
00045
00049    void set_int(const std::string &name, int i);
00050
00054    void set_bool(const std::string &name, bool b);
00055
00059    void set_double(const std::string &name, double d);
00060
00064    void set_string(const std::string &name, std::string str);
00065
00068
00073    int int_or(const std::string &name, int otherwise);
00074
00079    bool bool_or(const std::string &name, bool otherwise);
00080
00085    double double_or(const std::string &name, double otherwise);
00086
00091    std::string string_or(const std::string &name, std::string otherwise);
00092 };
```

6.30 trapezoid_profile.h

```
00001 #pragma once
00002
00006 typedef struct
00007 {
00008    double pos;
00009    double vel;
00010    double accel;
00011
00012 } motion_t;
00013
00034 class TrapezoidProfile
00035 {
00036    public:
00037
00044    TrapezoidProfile(double max_v, double accel);
00045
00052    motion_t calculate(double time_s);
00053
00059    void set_endpts(double start, double end);
00060
00065    void set_accel(double accel);
00066
00072    void set_max_v(double max_v);
00073
00078    double get_movement_time();
00079
00080    private:
00081    double start, end;
00082    double max_v;
00083    double accel;
00084    double time;
00085
00086
00087 };
```

6.31 vector2d.h

```
00001 #pragma once
00002
```

```
00003
00004 #include <cmath>
00005 #include "../core/include/utils/geometry.h"
00006
00007 #ifndef PI
00008 #define PI 3.141592654
00009 #endif
00015 class Vector2D
00016 {
00017 public:
00024     Vector2D(double dir, double mag);
00025
00031     Vector2D(point_t p);
00032
00040     double get_dir() const;
00041
00045     double get_mag() const;
00046
00050     double get_x() const;
00051
00055     double get_y() const;
00056
00061     Vector2D normalize();
00062
00067     point_t point();
00068
00074     Vector2D operator*(const double &x);
00081     Vector2D operator+(const Vector2D &other);
00088     Vector2D operator-(const Vector2D &other);
00089
00090 private:
00091
00092     double dir, mag;
00093
00094 };
00095
00101 double deg2rad(double deg);
00102
00109 double rad2deg(double r);
```

Index