



Subsonic Mk3

Passive under-desk
Subwoofer

Spec Sheet



Description:


The Subsonic Mk3 is a compact passive subwoofer designed to pair with the Supersonic desktop speakers. It uses a 6.5-inch Peerless SLS driver in a ported 3D-printed enclosure, with a down-firing layout and speaker-level binding posts for an external subwoofer amplifier.

Type:	Passive under-desk subwoofer
Enclosure Type:	Down-firing bass reflex
Nominal Impedance:	4 Ω
Driver:	Peerless SLS 6.5-inch (P830946)
Sensitivity:	Approx. 84 dB, 1 W / 1 m
Low-frequency extension:	41 Hz (-3 dB), 32 Hz (-10 dB)
Max SPL:	Approx. 111 dB @ 1 m equivalent*
Input:	Speaker-level binding posts
Enclosure:	3D printed, DIY-assembled
Dimensions (H $\times$ W $\times$ D):	300 $\times$ 249 $\times$ 219 mm (incl. feet)
Weight (assembled):	5 kg

*CTA-2010B: approx. 101.5 dB measured at 3 m, scaled to 1 m.




Frequency Response 2v (1 Watt)

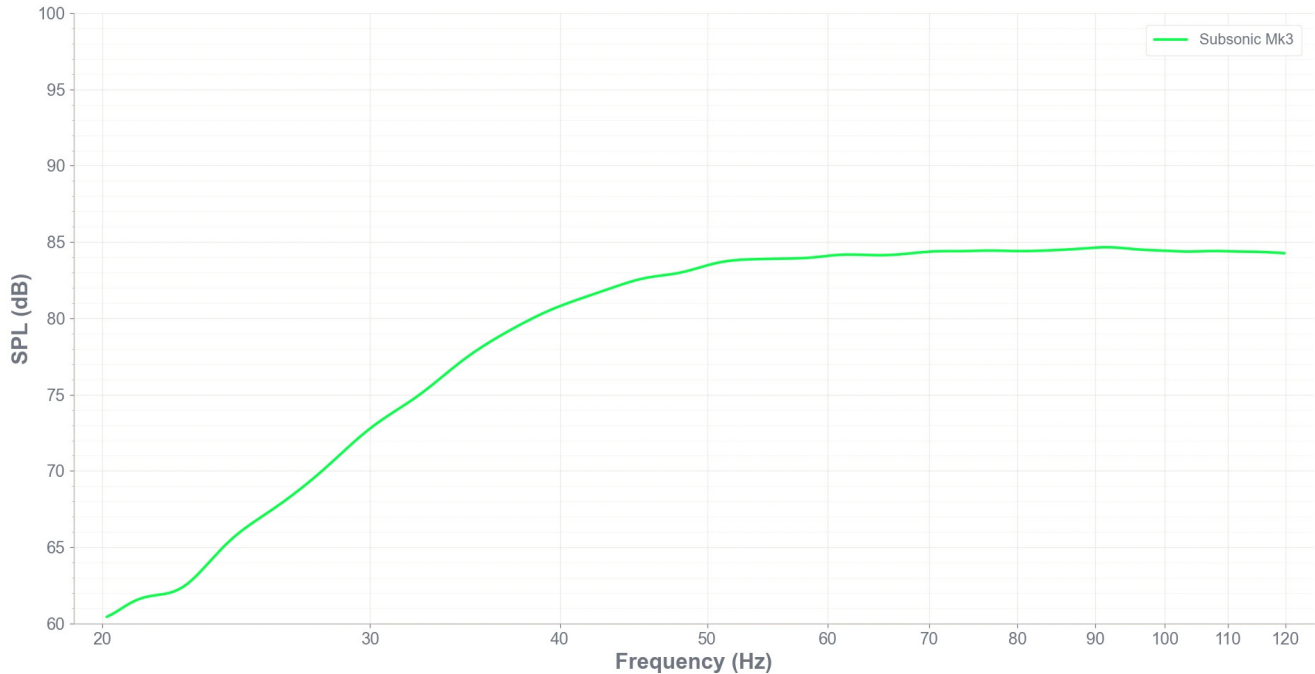


*Ground-plane measurement at 1 m, 2 V (1 W into 4 Ω), no EQ.
Approx. 84 dB sensitivity; 41 Hz (-3 dB), 32 Hz (-10 dB).

CTA 2010b @ 3m

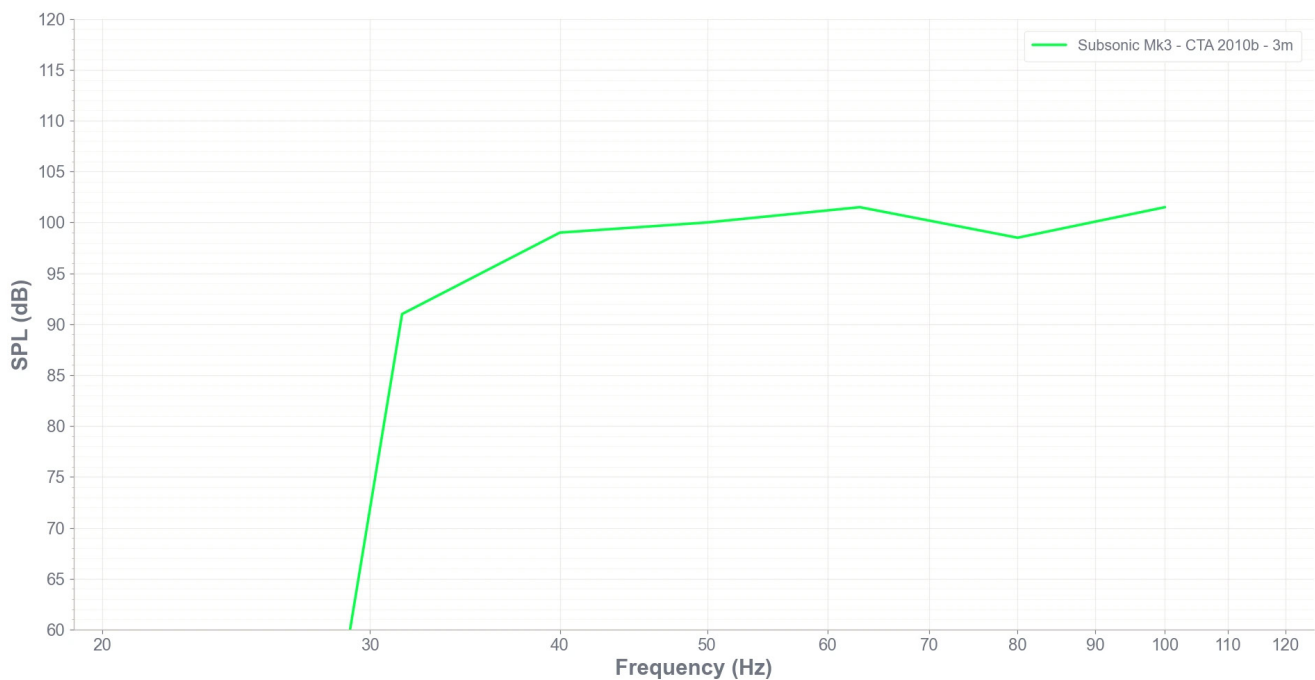


*CTA-2010B measured at 3 m; maximum approx. 101.5 dB.
1 m equivalent: approx. 111 dB (3 m measurement + 9.54 dB).

Subsonic Mk3 Impedance

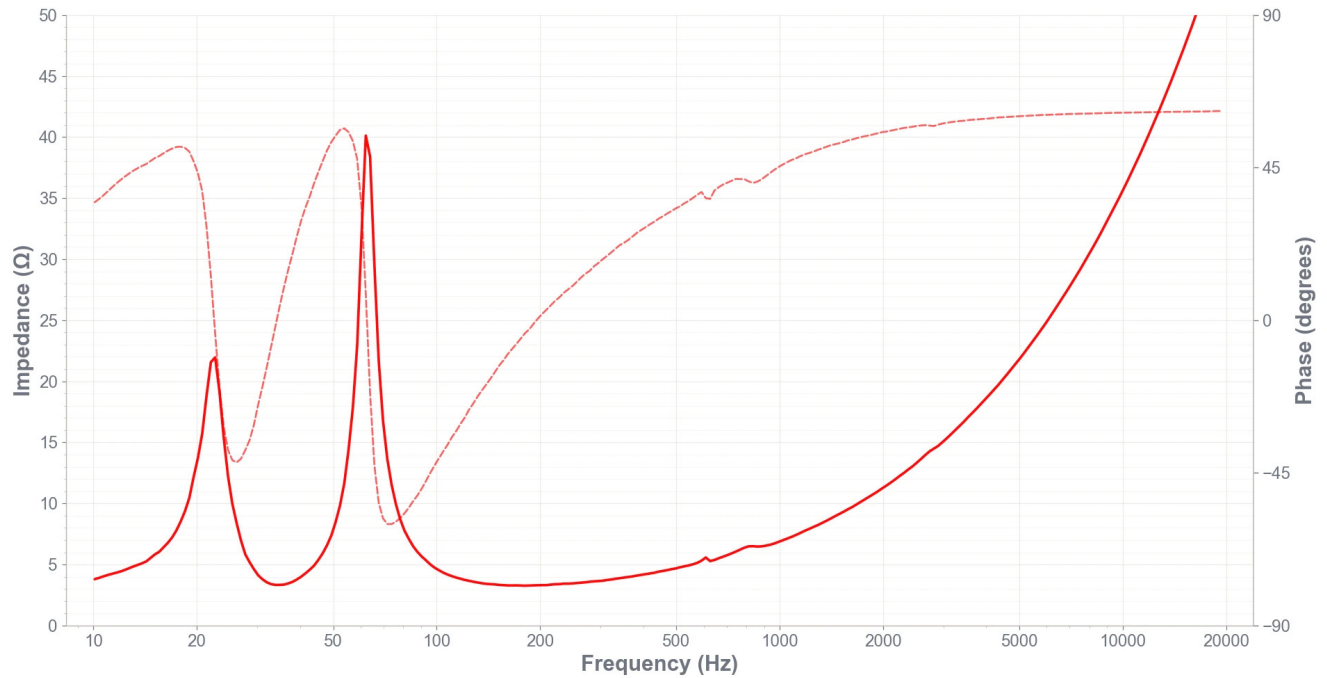


Frequency Response 2v (1 Watt)

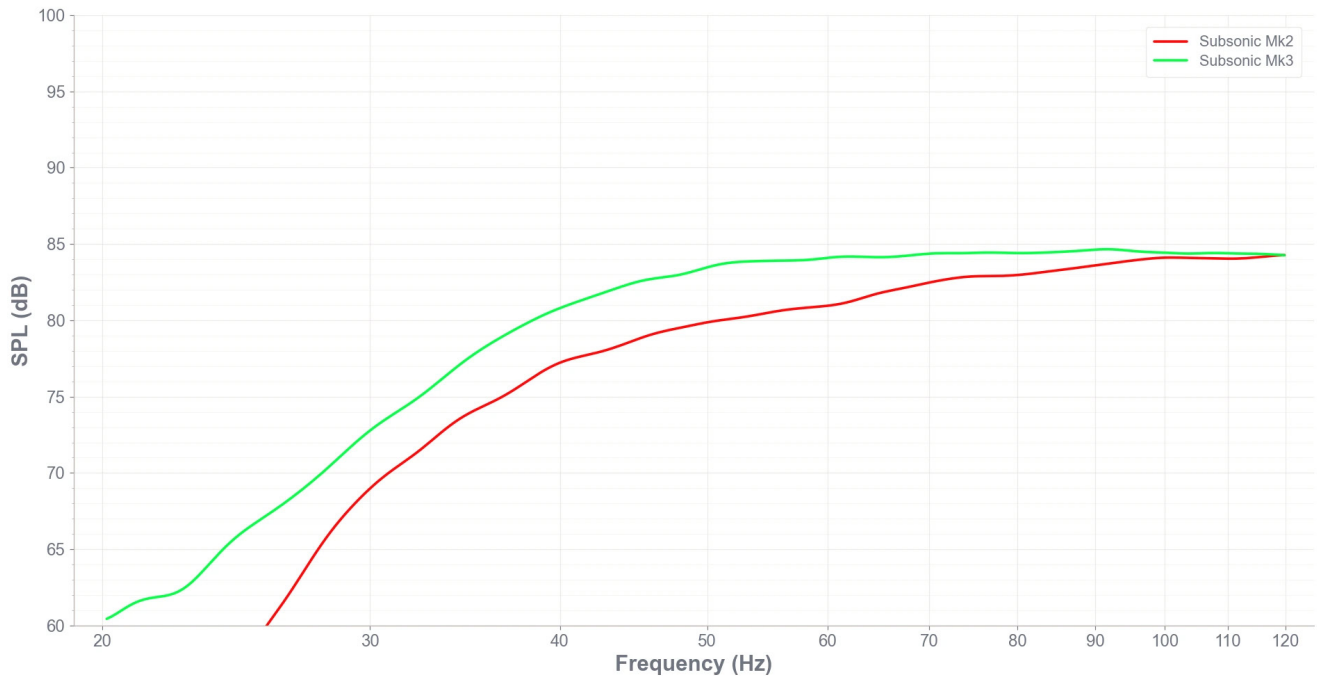

*Frequency response comparison at 2 V (1 W into 4 Ω).

CTA 2010b @ 3m

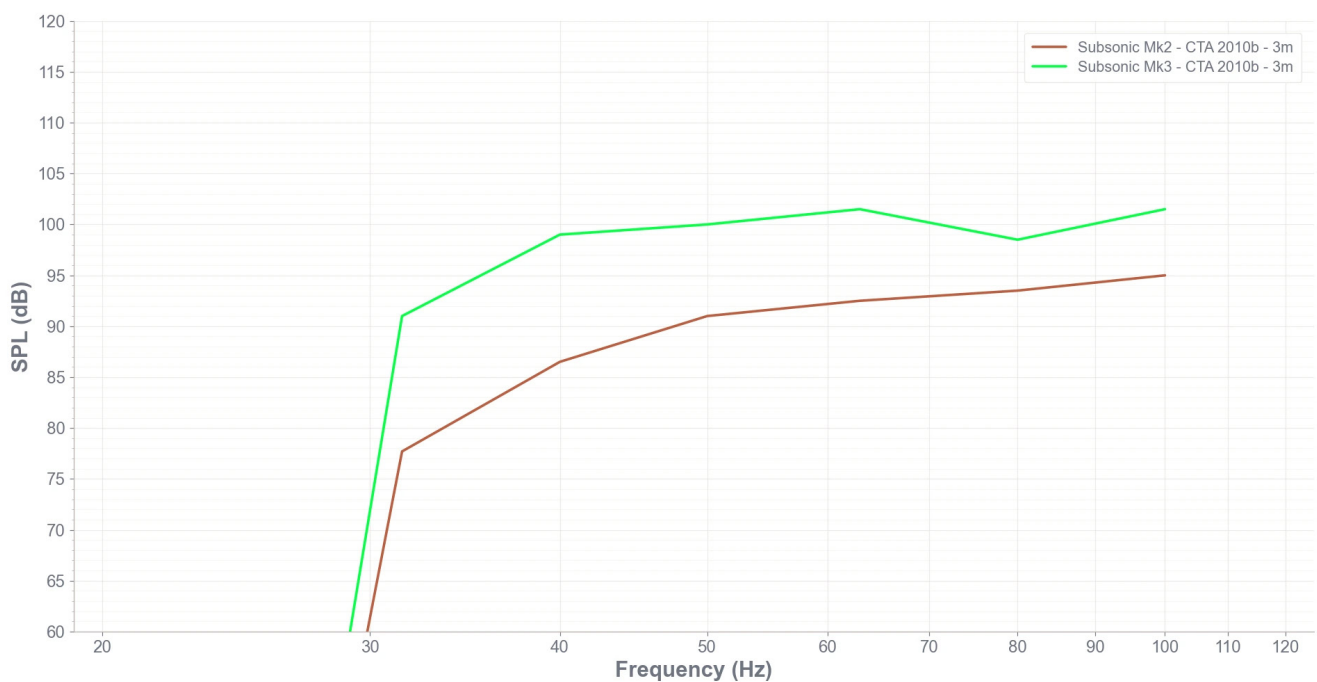

*CTA-2010B maximum output comparison, measured at 3 m.