Master Dark Maker

Introduction

MasterDarkMaker is a program to assist in image calibration for astrophotography. It is a single-purpose program, taking a collection of dark frames and combining them into a single "master dark frame" for use in calibration. It can be used via a graphic user interface or via a command-line interface. Precompiled binaries are available for Mac and Windows platforms. It is written in Python 3.8 and should run anywhere that Python can run.

The program reads and produces only FITS files, not Jpegs or other image formats.

Foundation Concepts

Purpose of Dark Frames

Dark Frames are an important part of the post-processing of astrophotography images.

A dark frame is an exposure of pure darkness (camera shutter closed, or telescope covered), with the same exposure length and at the same temperature as the images you plan to calibrate. With the shutter closed or the telescope covered, you would expect such a picture should be completely black, but it won't be. Instead it is a record of the noise inherent in your CCD chip at that exposure time and temperature. The noise will normally increase with both time and temperature.
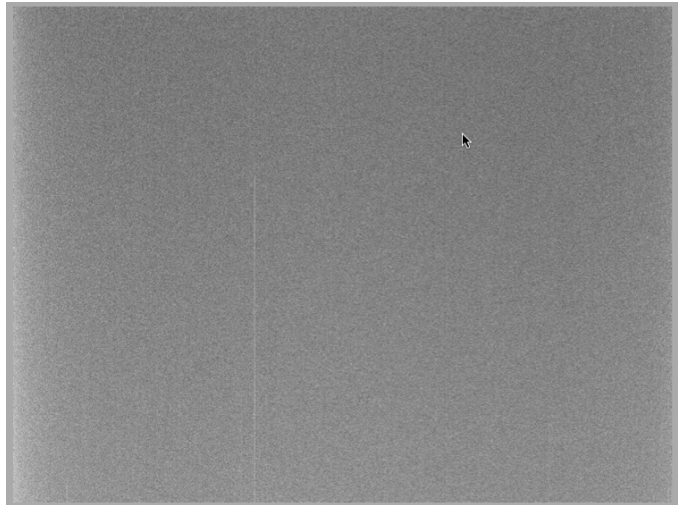
Image calibration software can use a dark frame to subtract such artifacts from your finished image.

If you have a CCD with a regulated cooling system, where the CCD is maintained at a constant and known temperature, you can collect dark frames at another time and save them for later use – you don't need to waste good dark-sky imaging time taking them. You can make up several collections at different exposure times and temperatures, and then use whichever set matches the exposure and temperature used on a given imaging night.

Typically, you will take a large number of dark frames then combine them into a single "master" calibration frame. That combination of multiple dark frames into a single master dark is what MasterDarkMaker is for.

Precalibrating Input Darks

Some imaging software can also *scale* dark frames, which means using a dark frame with a different exposure time or temperature and scaling the data it contains to match your exposure time and temperature. Scalable dark frames require a simple precalibration step so that only the important part of the dark signal, not the inherent fixed noise, is scaled.

You can precalibrate the dark frames before combining them into a master by subtracting a *bias frame* from each dark. A bias frame is a dark frame with an exposure length of zero, so it is a representation of the noise inherent in the camera before any exposure time is added.

You don't always need to do this. Not using bias frames leaves that inherent noise in your dark frames, which is normally what you would want – the total noise will then be subtracted from your images during calibration. However, if you are asking your image calibration software to scale your dark frames, then you should first subtract the bias from the dark frames. The noise represented by bias frames is constant and independent of exposure time and should not be scaled.

If you don't have a suitable bias frame, you can subtract a constant value, called a *pedestal* from every pixel in your dark images. Consider this a last resort only if you don't have bias frames. A pedestal value of around 100 is typically used.

So, if you are doing dark-frame scaling, you would normally a bias frame to calibrate the dark frames, and then subtract both the bias frames and the scaled dark frames from your main images. If you are not doing dark-frame scaling, don't precalibrate the darks, and don't use a bias with your main images (since the bias correction is still included in the darks).

Combining Dark frames into a Master Dark

You should take a large number of dark frames, so you get an average-smoothed picture of what your dark noise looks like. However, most image calibration software wants a *single* dark frame to use for calibration, so you must combine your collected darks into a single "master dark". (If your image calibration software allows you to provide a collection of dark frames, then it is just combining them into a master internally. You can save time by doing the combination once, rather than having your imaging software repeat the process every time.)

There are several algorithms for doing this combination.

Imagine that you have taken a number of dark frames – the more the better – all of the same dimension and binning as the images you will be calibrating. Think of the multiple frames as layers stacked on top of one another: for any given pixel in your master image, there is a stack of input pixel values at that position - one for each of the layered frames. Let's call this set of values for a given pixel a "column" of values.

For example, suppose you are capturing images that are 11 pixels wide and 12 pixels high. There are 11 x 12 = 132 pixels in each image. Suppose we have taken 5 dark frames for calibration. Each of them is also 11 x 12 pixels in dimension. So, you could think of the collection of dark frames as a collection of 11 x 12 = 132 columns, each with 5 values in it (the values from 5 dark frames).

Images are 11 x 12 pixels

5 Image Files

"Column" of values for 1 pixel
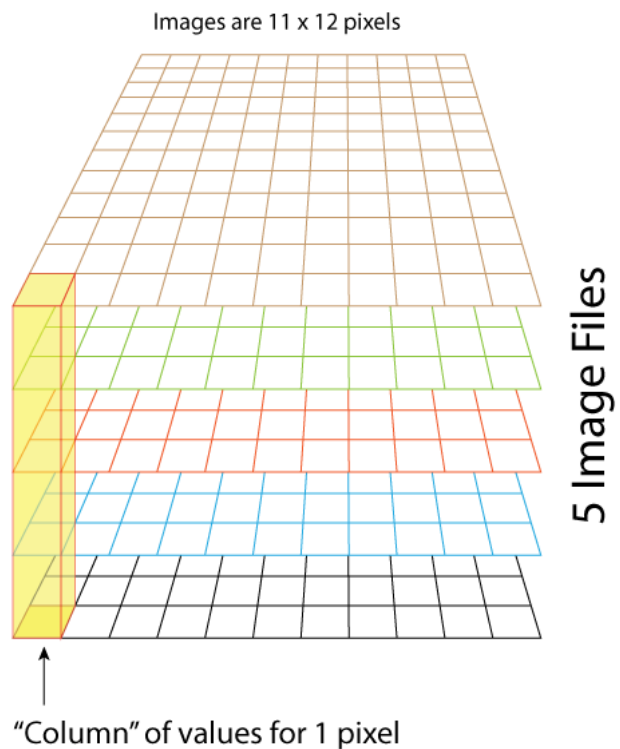
Several algorithms are available to combine the frames into a single master, each with advantages and disadvantages. Choosing the best algorithm depends on circumstances such as the number of frames to be combined and the amount and type of noise in the frames.

The two most basic combination methods are:

Mean	"Mean" combination combines all the frames using a simple average. Each pixel in the resulting image is the average of the pixels in that column.
	This method gives the best signal-to-noise ratio (SNR). However, outlier pixels (pixels that are considerably brighter or darker than the others in their column) in any of the input frames will affect the result so things like stray cosmic ray hits will show through.

Median	This combines the frames by taking the *median* value from each column. The median is the middle value if the values are sorted into ascending order (or the average of the two middle values if there is an even number of values).
	This tends to reject outlier noise such as cosmic ray hits since they are usually much brighter than the naturally occurring pixels in that region and won't end up being the middle values. However, it produces a lower SNR than mean combination.
	So, this method is a better choice for frames that have sporadic noise but that, overall, are not very noisy.

Two more advanced algorithms get close to the SNR of Mean while reducing the impact of random noise, close to the performance of Median. They are:

Min-Max Clipped Mean	This method drops the minimum and maximum values (i.e. all the instances of the minimum value and all the instances of the maximum value) from each column and then calculates the Mean of the remaining values. The dropping function can be repeated more than once: for example, you could drop the minimum and maximum values, and the next-to-minimum and next-to-maximum values, and so on.
	This works well with noise that is either very bright (cosmic ray hits) or very dark. However, since you are actually throwing away some data, it requires that you have a large number of input frames to work well. At least 10 frames, and preferably many more.
	It also can have a problem when a given column only contains one or two values. Throwing away the minimum and maximum throws out all the values, and then the algorithm has to back up and try throwing away less. This can be quite slow.
Sigma-Clipped Mean	This method also throws away outlier values and then takes the average of the rest, but it uses statistical techniques to determine what to throw away. It works as follows:
	For each column we calculate the *mean* and the *standard deviation* of the values in that column. (*Standard deviation* is a common statistical measure that gives an indication of the amount of variability in a set of data.)

Then we calculate the *z-score* of each value in the column. The *z-score* is the distance of the value from the mean in multiples of standard deviation. So, a z-score of 2 means that the value in question is 2 standard deviations away from the mean.

Finally, we discard any values with a z-score above a given threshold and calculate the mean of the remaining values. For example, a threshold of 2 means "drop any values in a column that are more than 2 Standard Deviations from the mean of that column".

This method works very well with a large number of input frames, and is the recommended method if you have more than about 10 frames.

In normally distributed data, setting the z-score threshold to 2.0 will reject about 5% of the data and keep about 95%. A lower z-score will reject more data (z=1.0 rejects about 32% and keeps about 68%), while a higher z-score will reject less data (z=3.0 keeps about 97%). Using this method requires a bit of experimentation. Start with a z threshold of 2.0 then reduce it with very noisy data or increase it with very clean data.

The z threshold is a floating-point number and should rarely be outside the range 1.0 to 3.0. A threshold of 2.0 will work well most of the time.

Two Modes of Application Operation

MasterDarkMaker can be used with an interactive graphic user interface (GUI), or from the command line with flags and filenames like a traditional UNIX command.

The command line option is intended to support scripting use of the program and combining it with other processes in your workflow. However, I recommend you start with the GUI to become familiar with the behavior of the program. The command line is less intuitive and does less error checking. The GUI is also the only way to modify the default settings in the program preferences.

Using the GUI

When you start the program as a Windows or Mac application, it will open in GUI mode, with the window shown here.
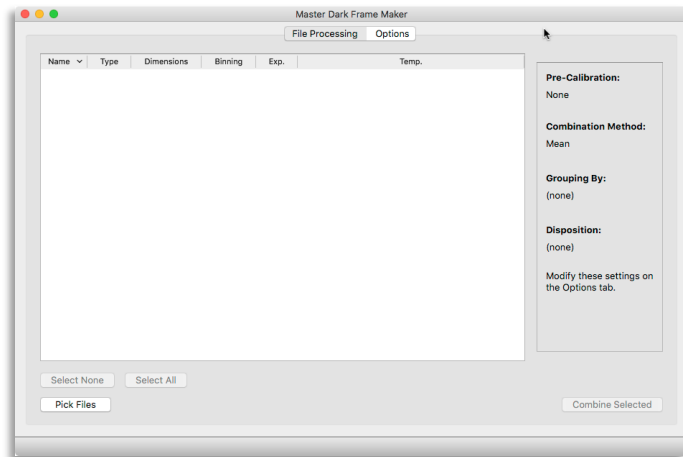
Preferences

Before we explore the main window, on your first use you should visit the Preferences window by selecting Preferences from the MasterDarkMaker (Mac) or File (Windows) menus.

The preferences window sets default values that are used when a new GUI session is started, and when the command line is used with a given setting not specified with a command line option.
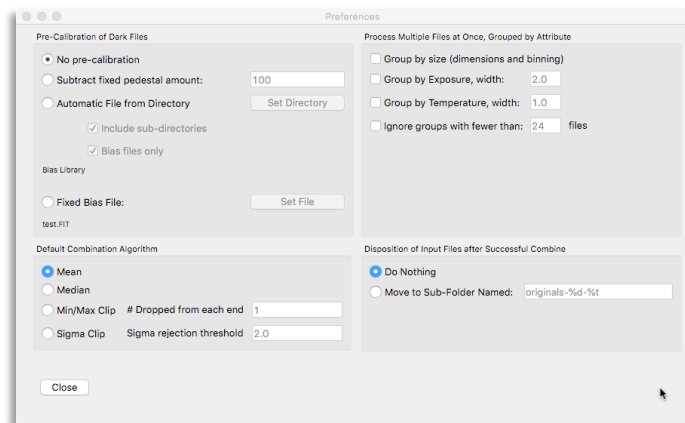
The Preferences window is divided into four sections:

Pre-Calibration of Dark Files

In this section you specify if and how the dark files should be precalibrated, as discussed above. The last two options, "Automatic File from Directory" and "Fixed Bias File" both use a bias frame. The difference is that "Automatic" will automatically pick the best bias file from a directory you specify, while "fixed file" has you specify the exact file to use.

Default Combination Algorithm

In this section you select the combination algorithm (Mean, Median, Min/Max Clip, or Sigma Clip) as described above. For the Min/Max and Sigma options you also specify the relevant numeric parameter, as described above.

Process Multiple Files at Once, Grouped by Attribute

These settings allow the program to process a large number of dark frames into multiple outputs, grouped by size or other attributes. See the section "Processing Files in Groups", below, for an explanation of these settings.

Disposition of Input Files

Optionally, MasterDarkMaker can move your input dark frames to a subfolder after they are processed. This can help keep files organized in certain workflows.

Main Window

The main window has a table, initially empty, that will list your Dark Frame files. There are a number of options that control the combination process. To save window space, these options are manipulated in the *Options* tab and summarized to the right of the file table on the *File Processing* tab.

Start by clicking "Pick Files" or by selecting Open from the File menu. In the dialog that opens, select all the dark frame files you will want processed. You will have a chance to further refine the list, so feel free to pick all the files in a folder if that is more convenient.
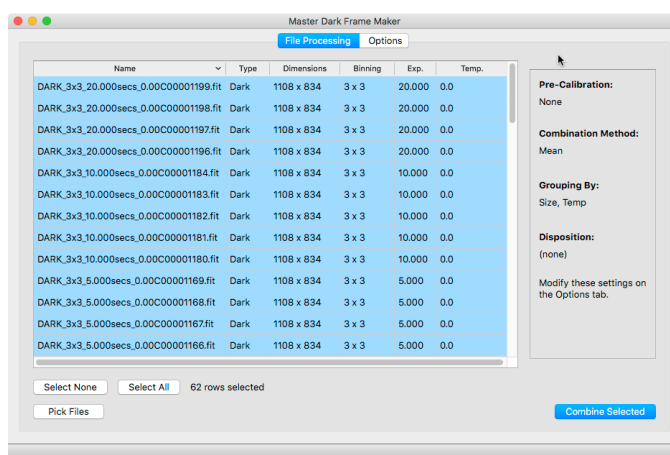
The selected files will be listed, along with some of their internal FITS metadata, in the file table. Click on column headings to sort the table by the various attributes.

Visit the Options tab to select your combination algorithm and other options, then go back to the File Processing tab and select one or more of your listed files to actually combine. Command-A or Control-A to quickly select all the files.

By default, the program will only allow you to select files whose FITS metadata says they are Dark files. (This is so you can just Command/Control-A to select all the files in a folder, then Command/Control-A to select all the files in this window, and you will end up with just the Dark frames, not any other stray files that happened to be in the folder.) However, some acquisition programs don't set that metadata correctly, so if you are certain the files you have picked are Dark files but MasterDarkMaker thinks they are not, you can click the "Ignore FITS file type" checkbox to bypass this check.

The "Combine Selected" button will be enabled once you have files selected and valid parameters chosen. If it is not enabled, something is not valid in your setup. The problem could be:

- No files selected (highlighted)
- Not enough files selected for the Min/Max method (there must be at least 2n + 1 files for min/max parameter n).
- Selected files are not all dark frames and the "ignore" button is not checked.
- Selected files are not all the same size, unless you are processing by groups (see below).

Once you have a valid plan, click the Combine button and you will be prompted for the name of your output file, which will then be created. Combining a large number of files from a high-pixel camera might take several seconds. (On my main computer, combining 32 8-megapixel files with the Sigma Clip method takes about 30 seconds.)

When using the GUI version, a console window will open during the combination operation, displaying progress results. This window also contains a Cancel button which will stop the combination task, in case you realize you forgot some important setting.
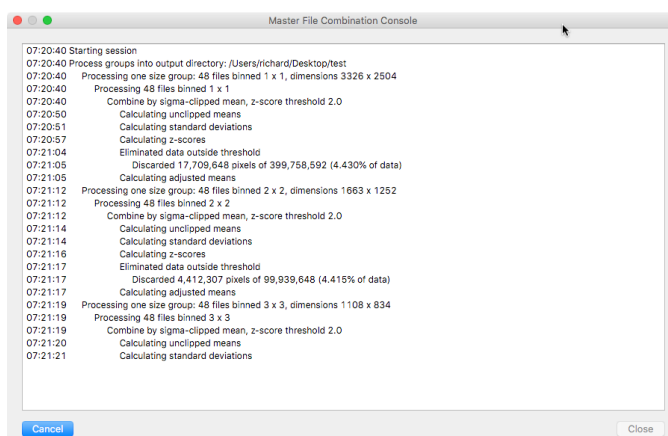
Processing Files in Groups

You may have a large set of Dark files in one directory but not want, or be able, to combine them all into a single master file. For example, they may be different binning levels, or different exposure times.

On the Options tab, you can select "Group by size", "Group by exposure", and "Group by temperature". These are not mutually exclusive; you can select any combination of these settings. If selected, the program will process your files in groups and produce a separate master file for each group. Instead of prompting you for a single
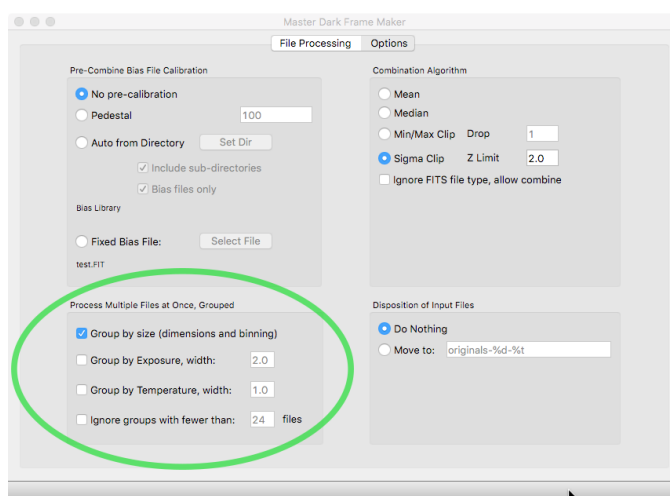
output file to produce, the program will prompt you for a *directory* to receive all the created master files.

Temperature and exposure grouping are different from size grouping because, while image sizes are fixed values, it is quite possible for temperatures to vary by small amounts between frames. For example, suppose you have files with temperatures of:

0.1°
-9.9°
-15.07°
-0.1°
-10°
-15°
0°
-10.2°
-15.2°

You probably want that to be considered 3 temperature groups, not 9. Like this:

0.1°
-9.9°
-15.07°
-0.1°
-10°
-15°
0°
-10.2°
-15.2°

So, if you select temperature grouping, you must specify a width that the program will use to cluster the files into groups. A width of 1.0 (the default) will group files into groups where the temperature varies up to about 1 degree on either side of the group center. The width parameter can be between 0.1 and 50. The clustering uses statistical techniques, and the width parameter is not a "hard" limit — files outside the specified width may be included if the overall grouping result is better. The same "width" feature applies to grouping by exposure.

Automatic Selection of Precalibration Bias Files

If you are precalibrating your dark frames with a bias frame (see above for when this is appropriate), you might have a folder with several master bias frames, taken with different binning levels and at different temperatures. The program can automatically select the best bias frame from this library of bias frames.

On the Options pane, select "Auto from Directory" as your precalibration method and click "Set Dir" to specify the directory containing all your bias files. The program will then automatically select the best bias file (the file with the correct binning and closest to the temperature of your darks). If the folder contains files other than Bias files, you can click "Bias files only" to have the search consider only the bias files.
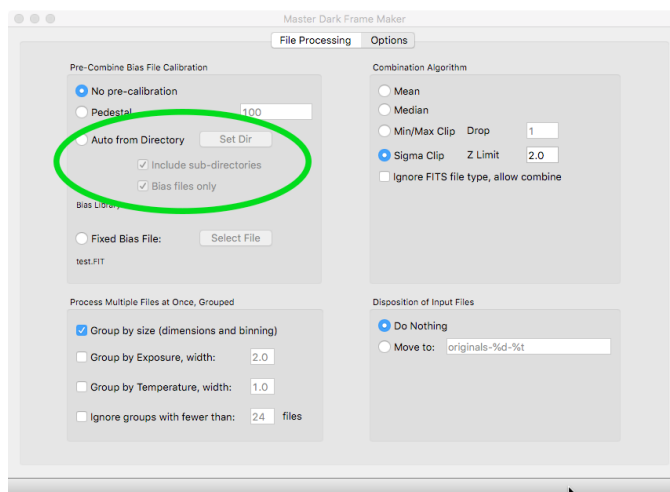
Using the Command Line

To use command line mode, just run the program from your system's terminal or shell window and specify options and input files as command line arguments.

Run the program with the "-h" flag to get a brief summary of the available options. Every setting discussed in the GUI section above is available as a command-line option. If an important option is not specified on the command line, the value set in the Preferences will be used.