




Make sure the CVM connector symbol follows the mirrored pin orientation in design guide chapter 9.0.


CVM CONNECTOR 1/3

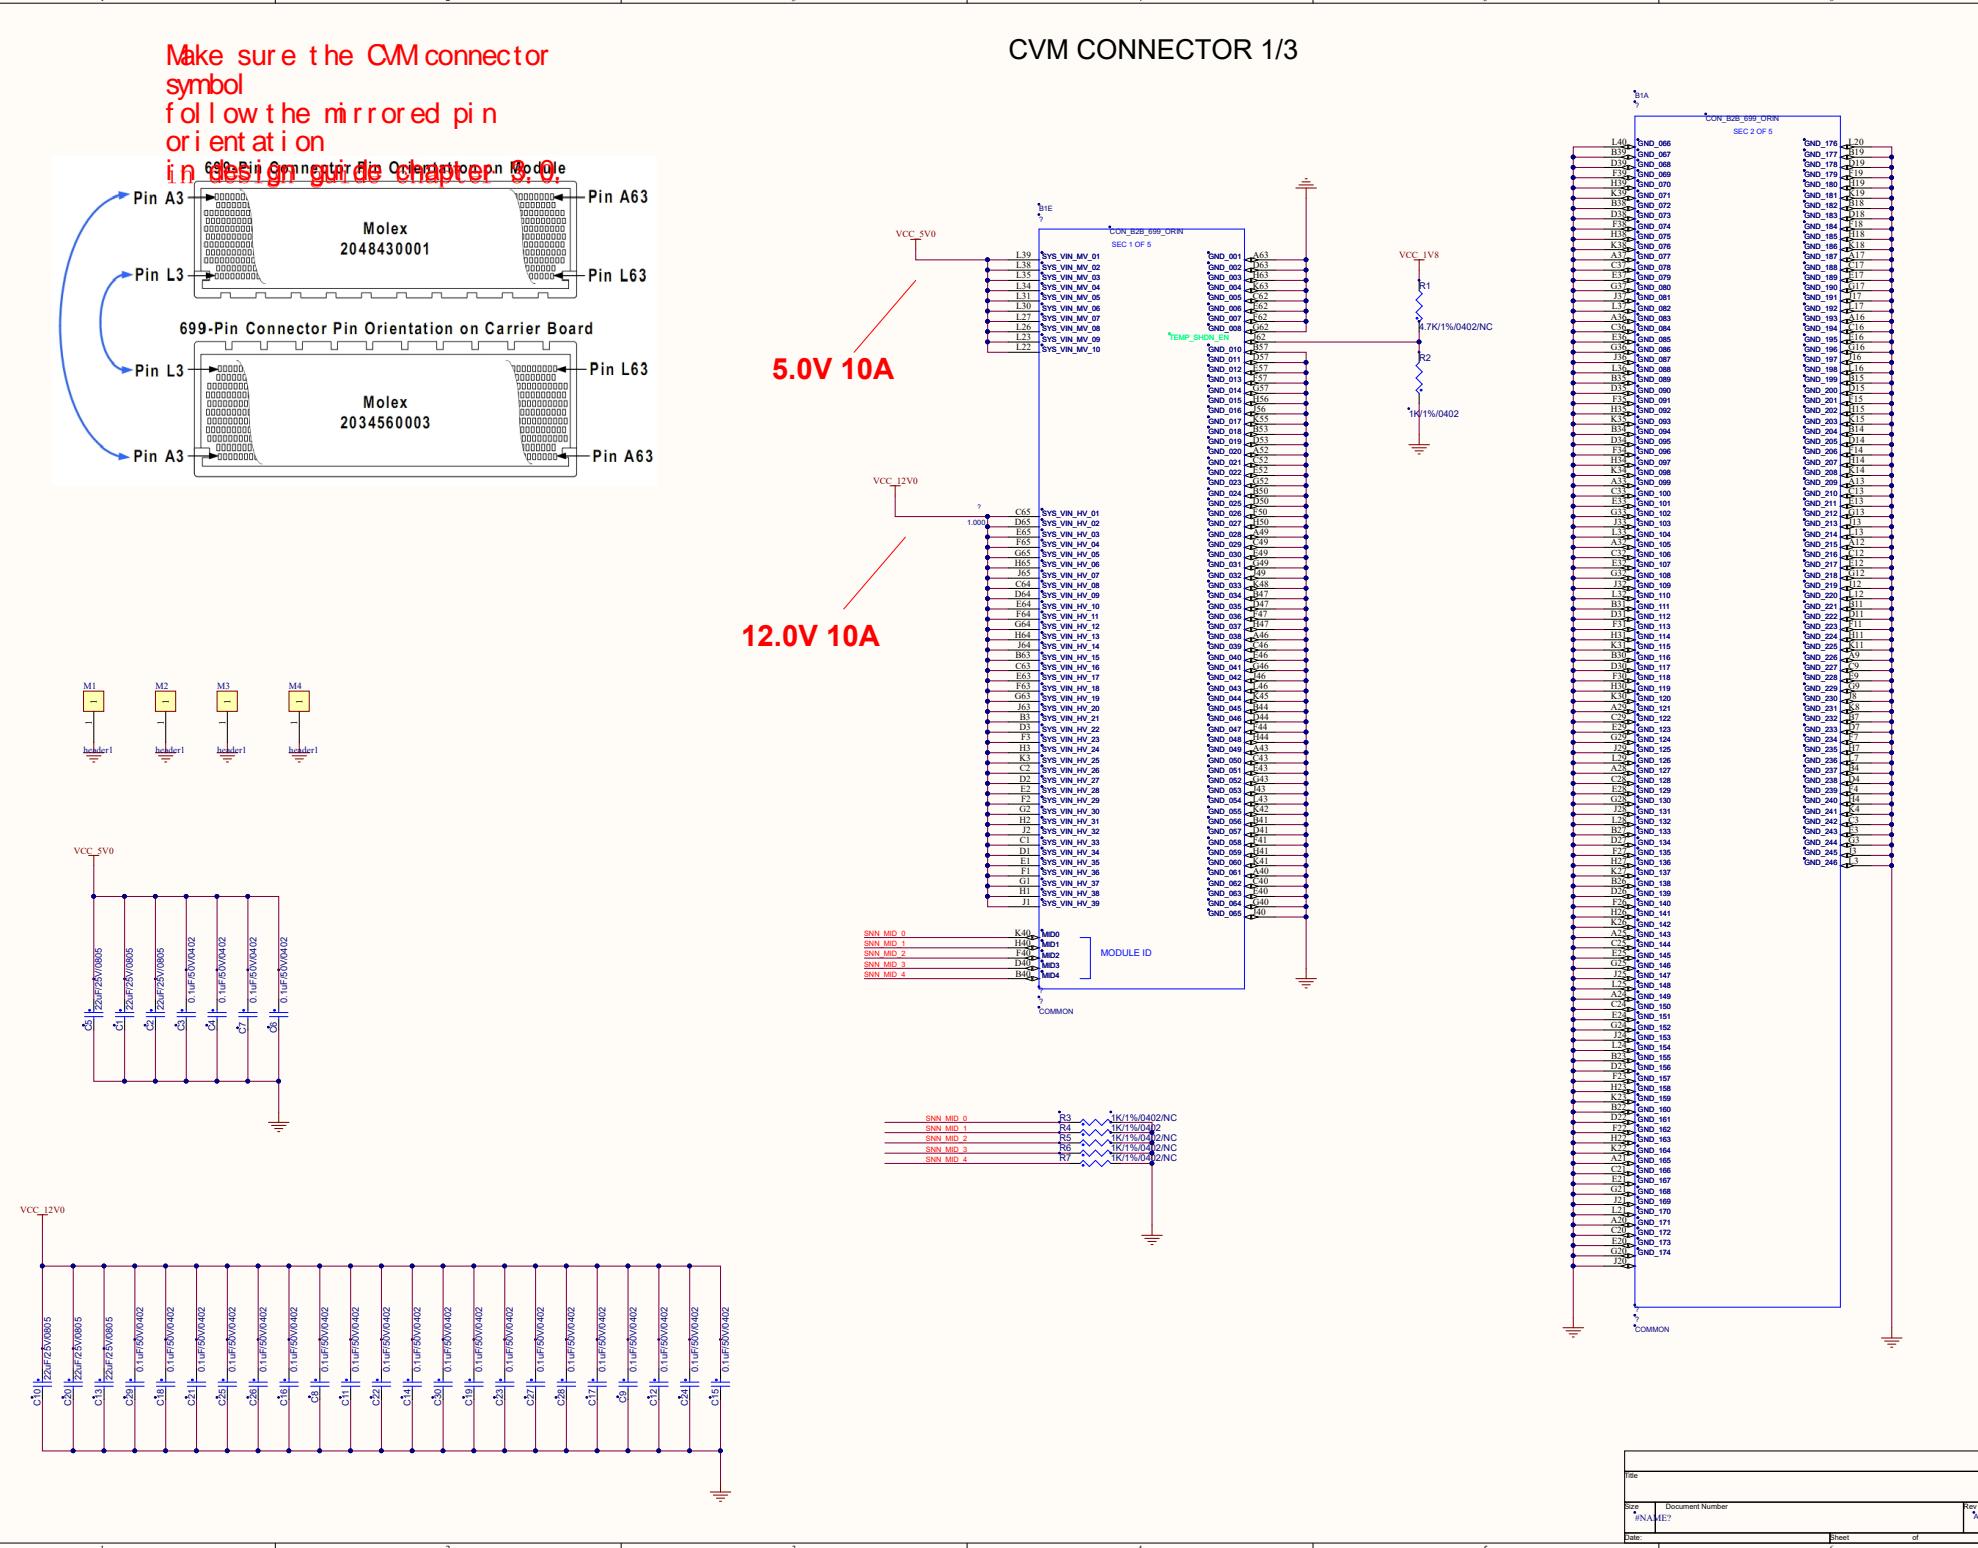


File	Document Number	Rev
Date	NAME?	A

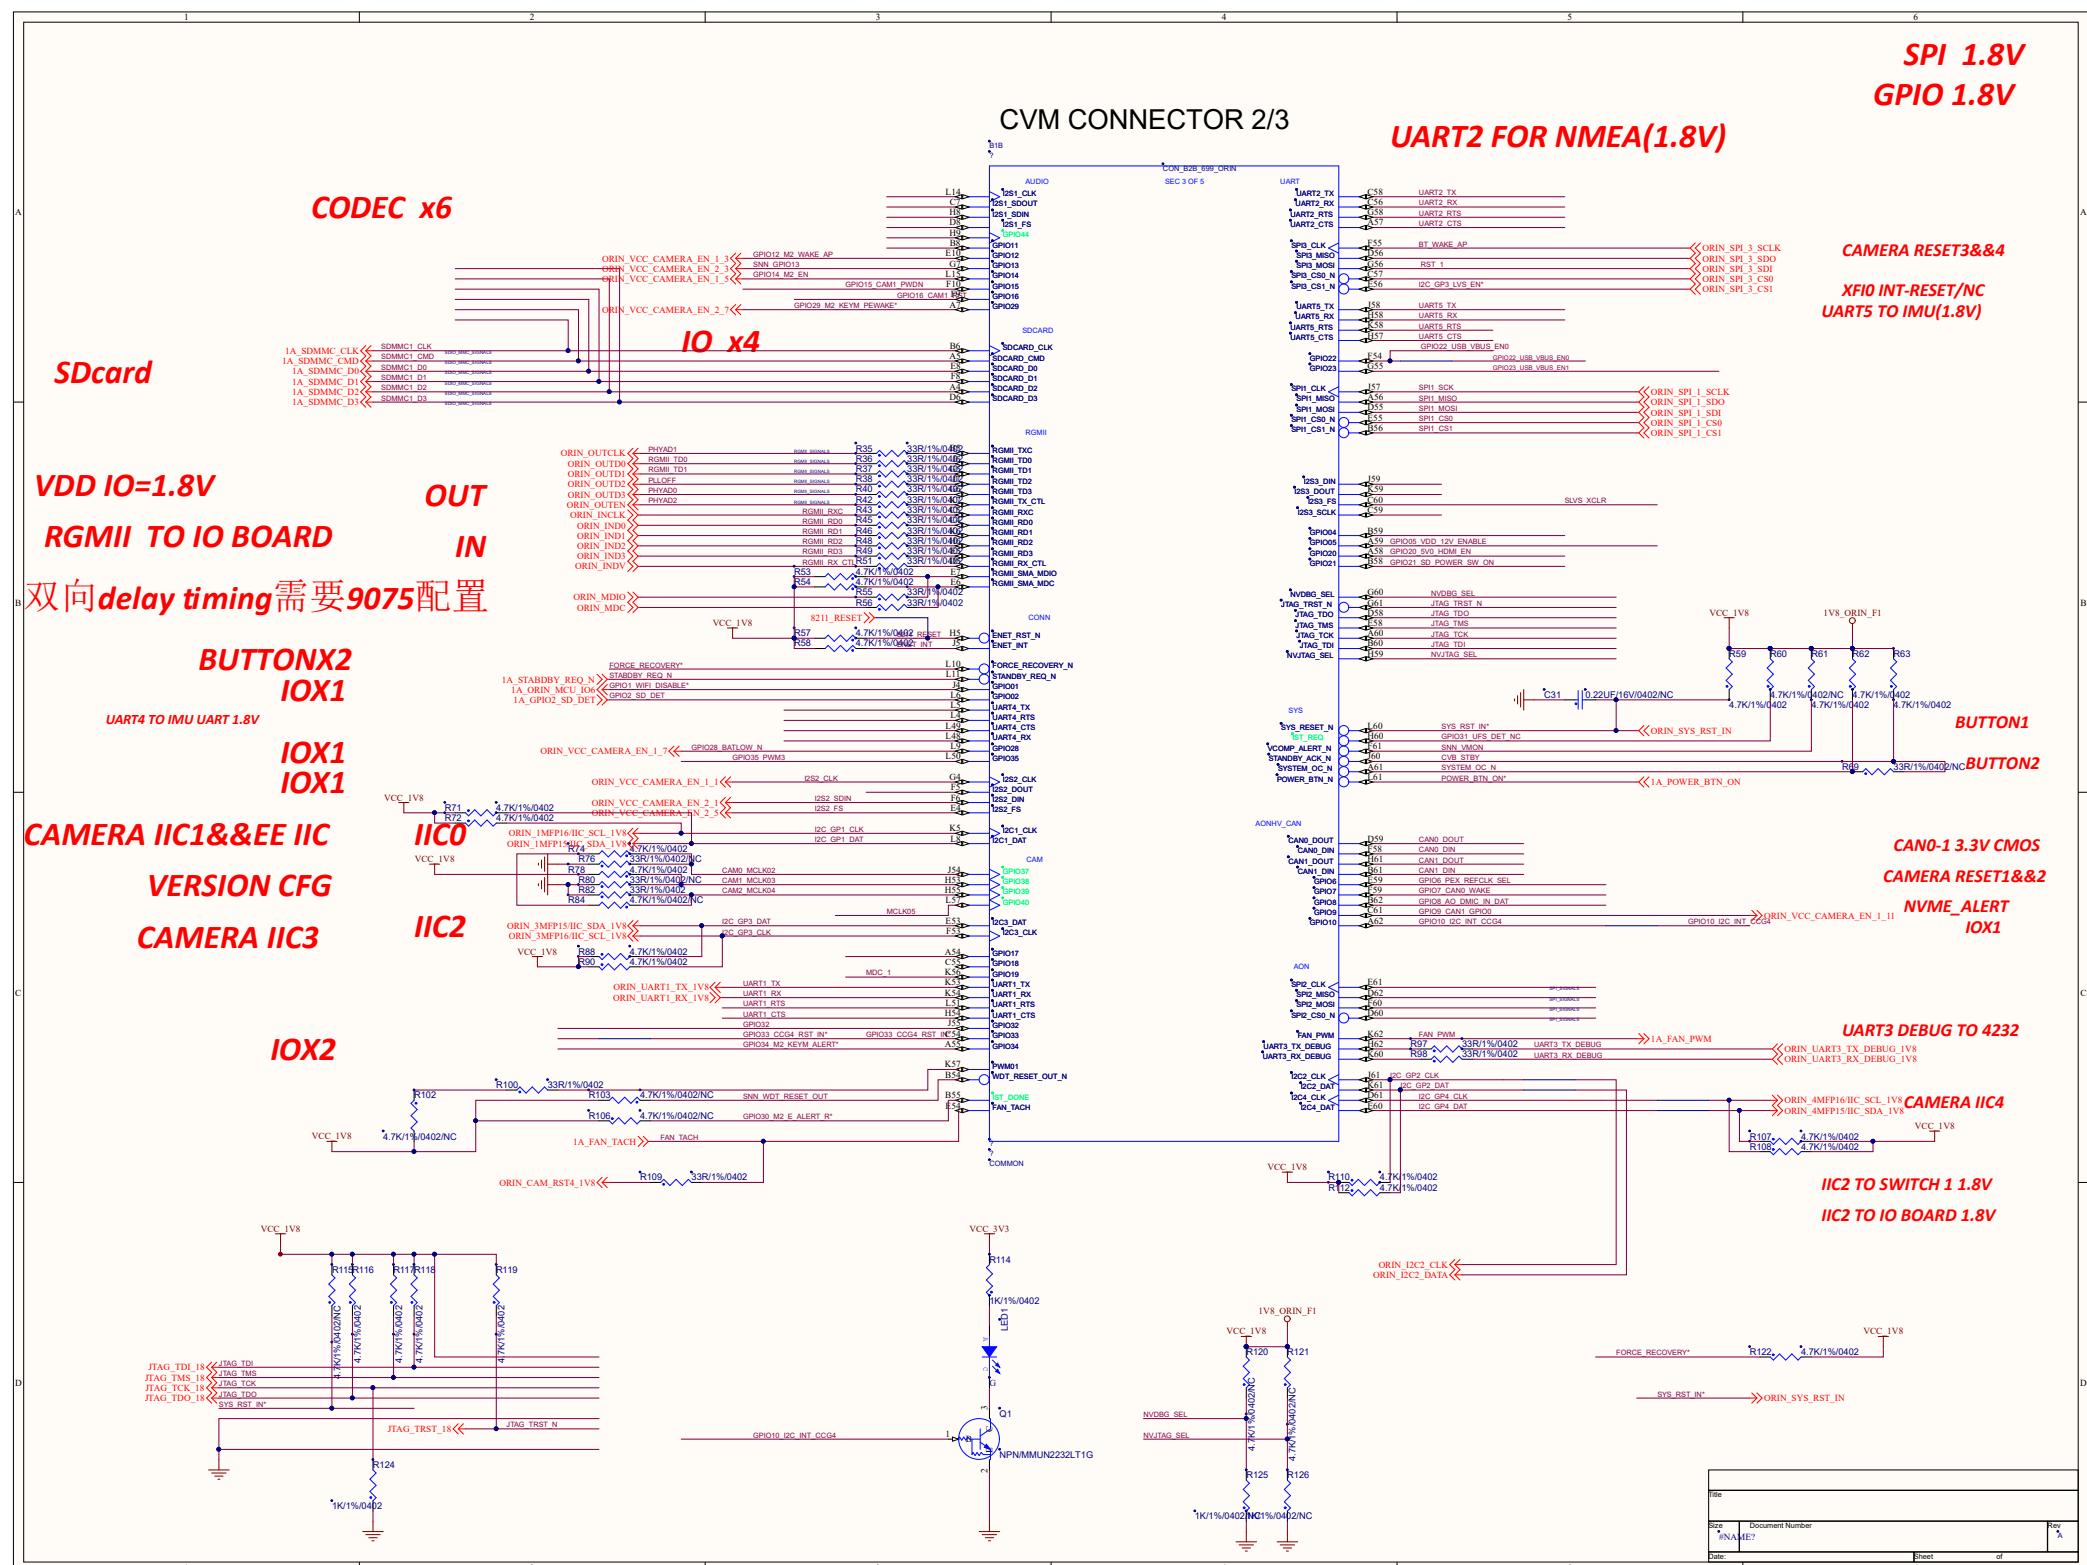

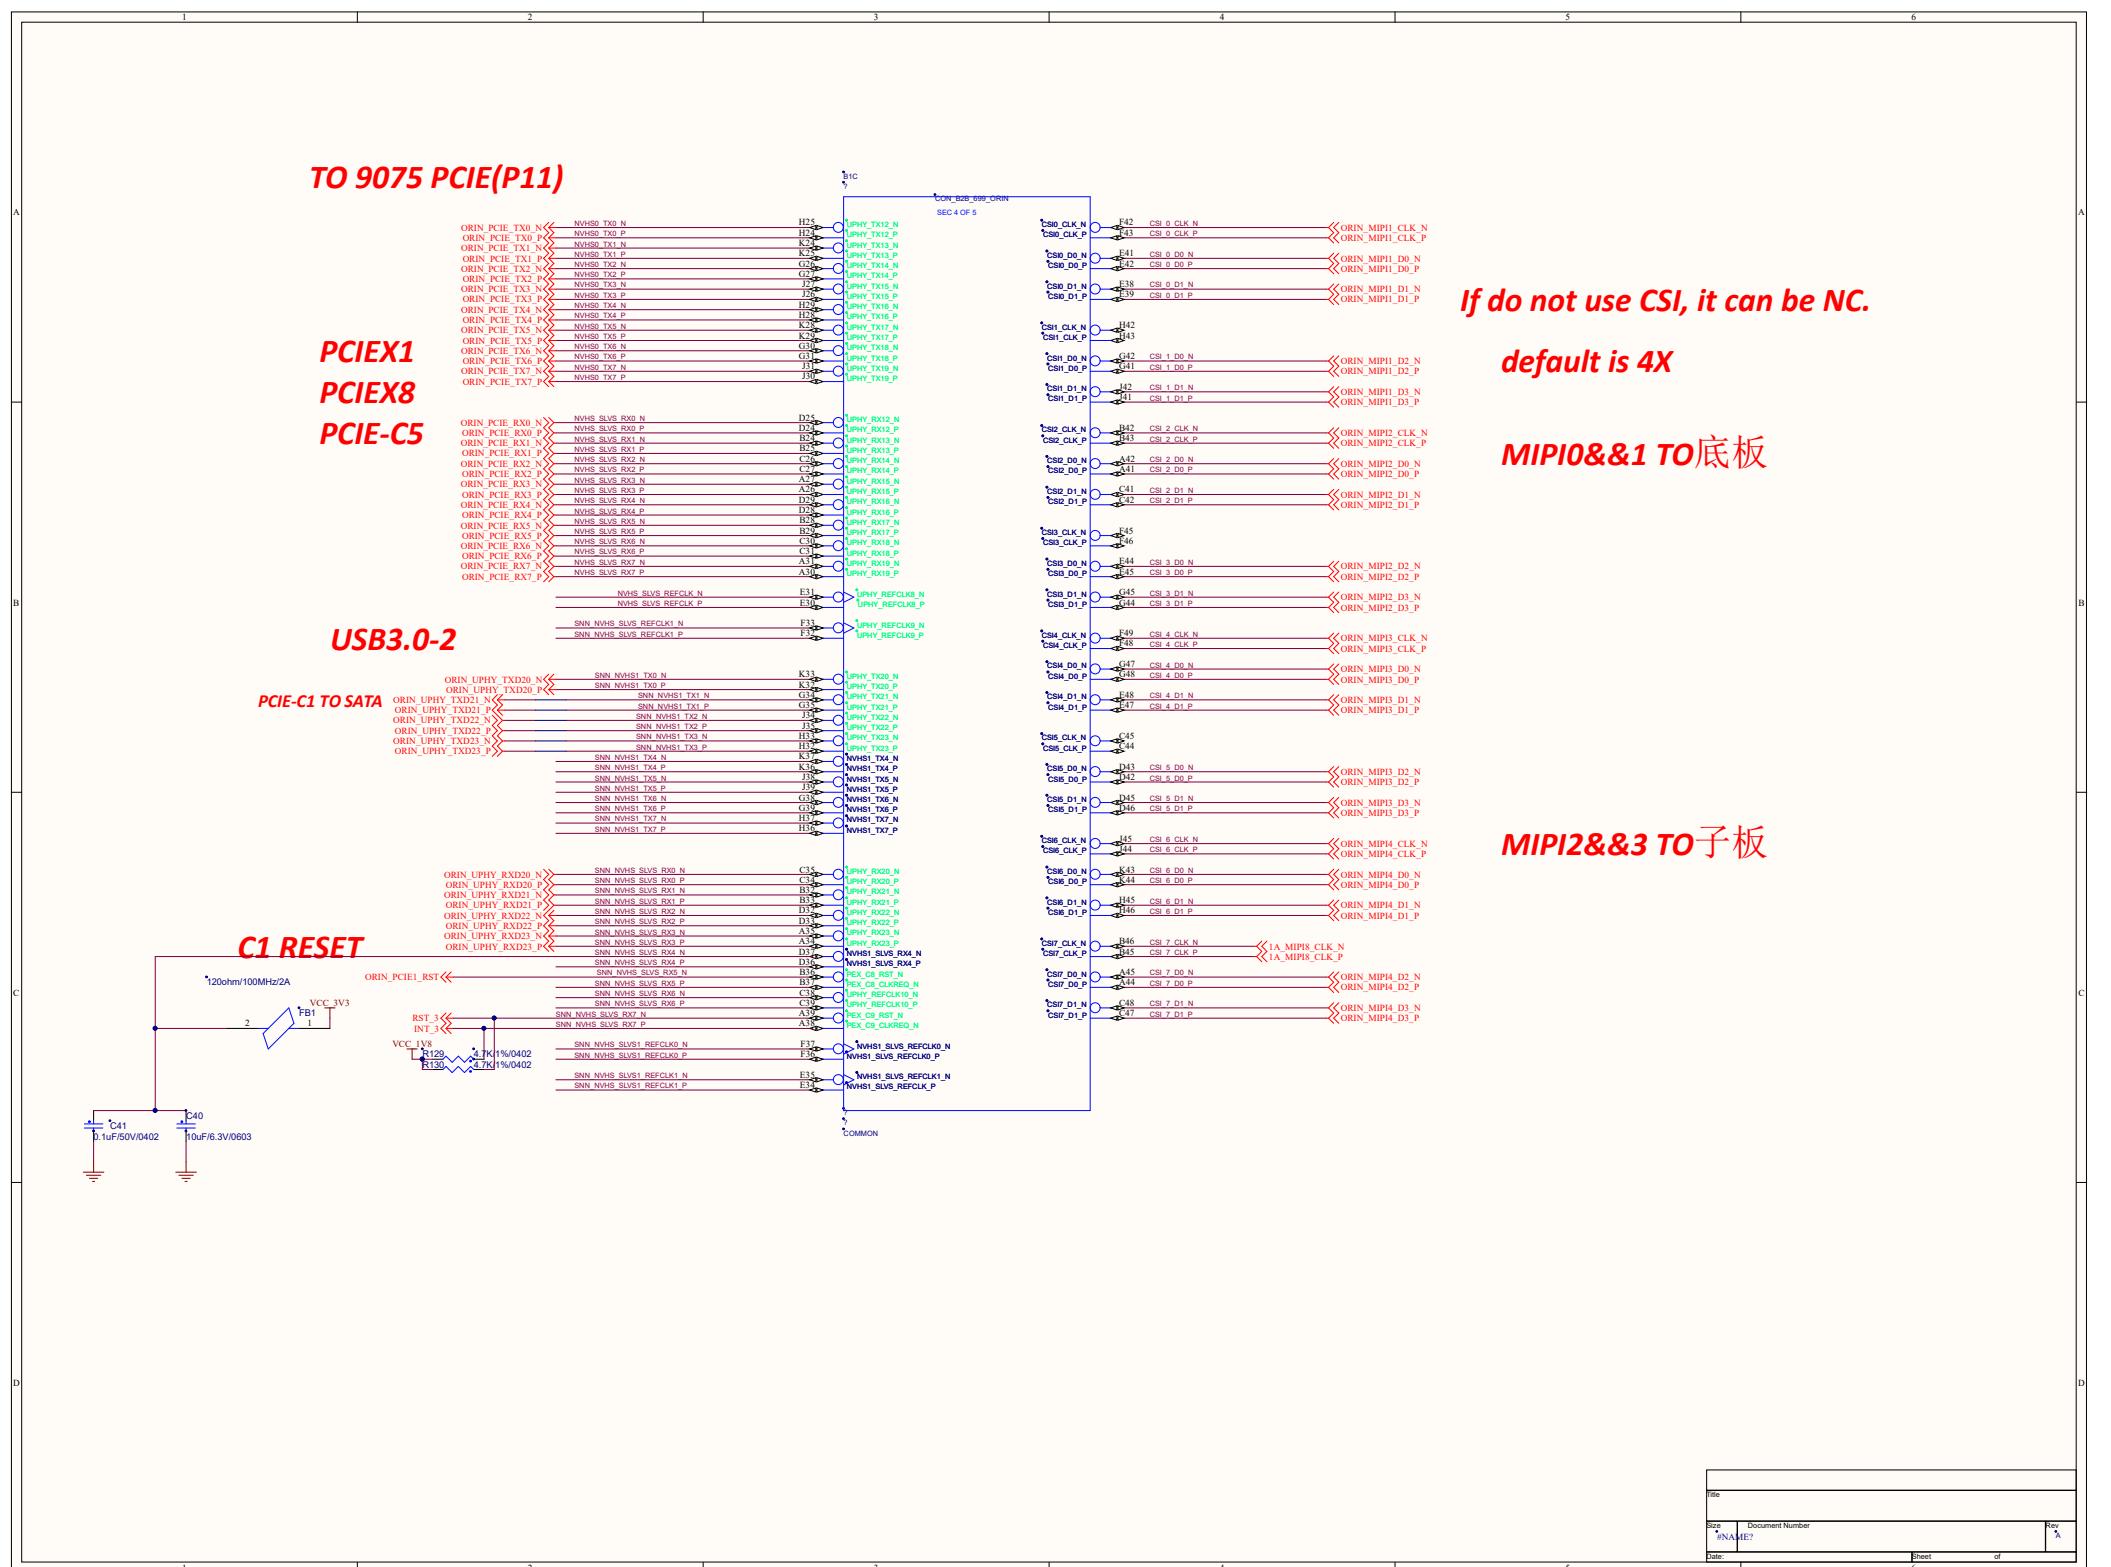


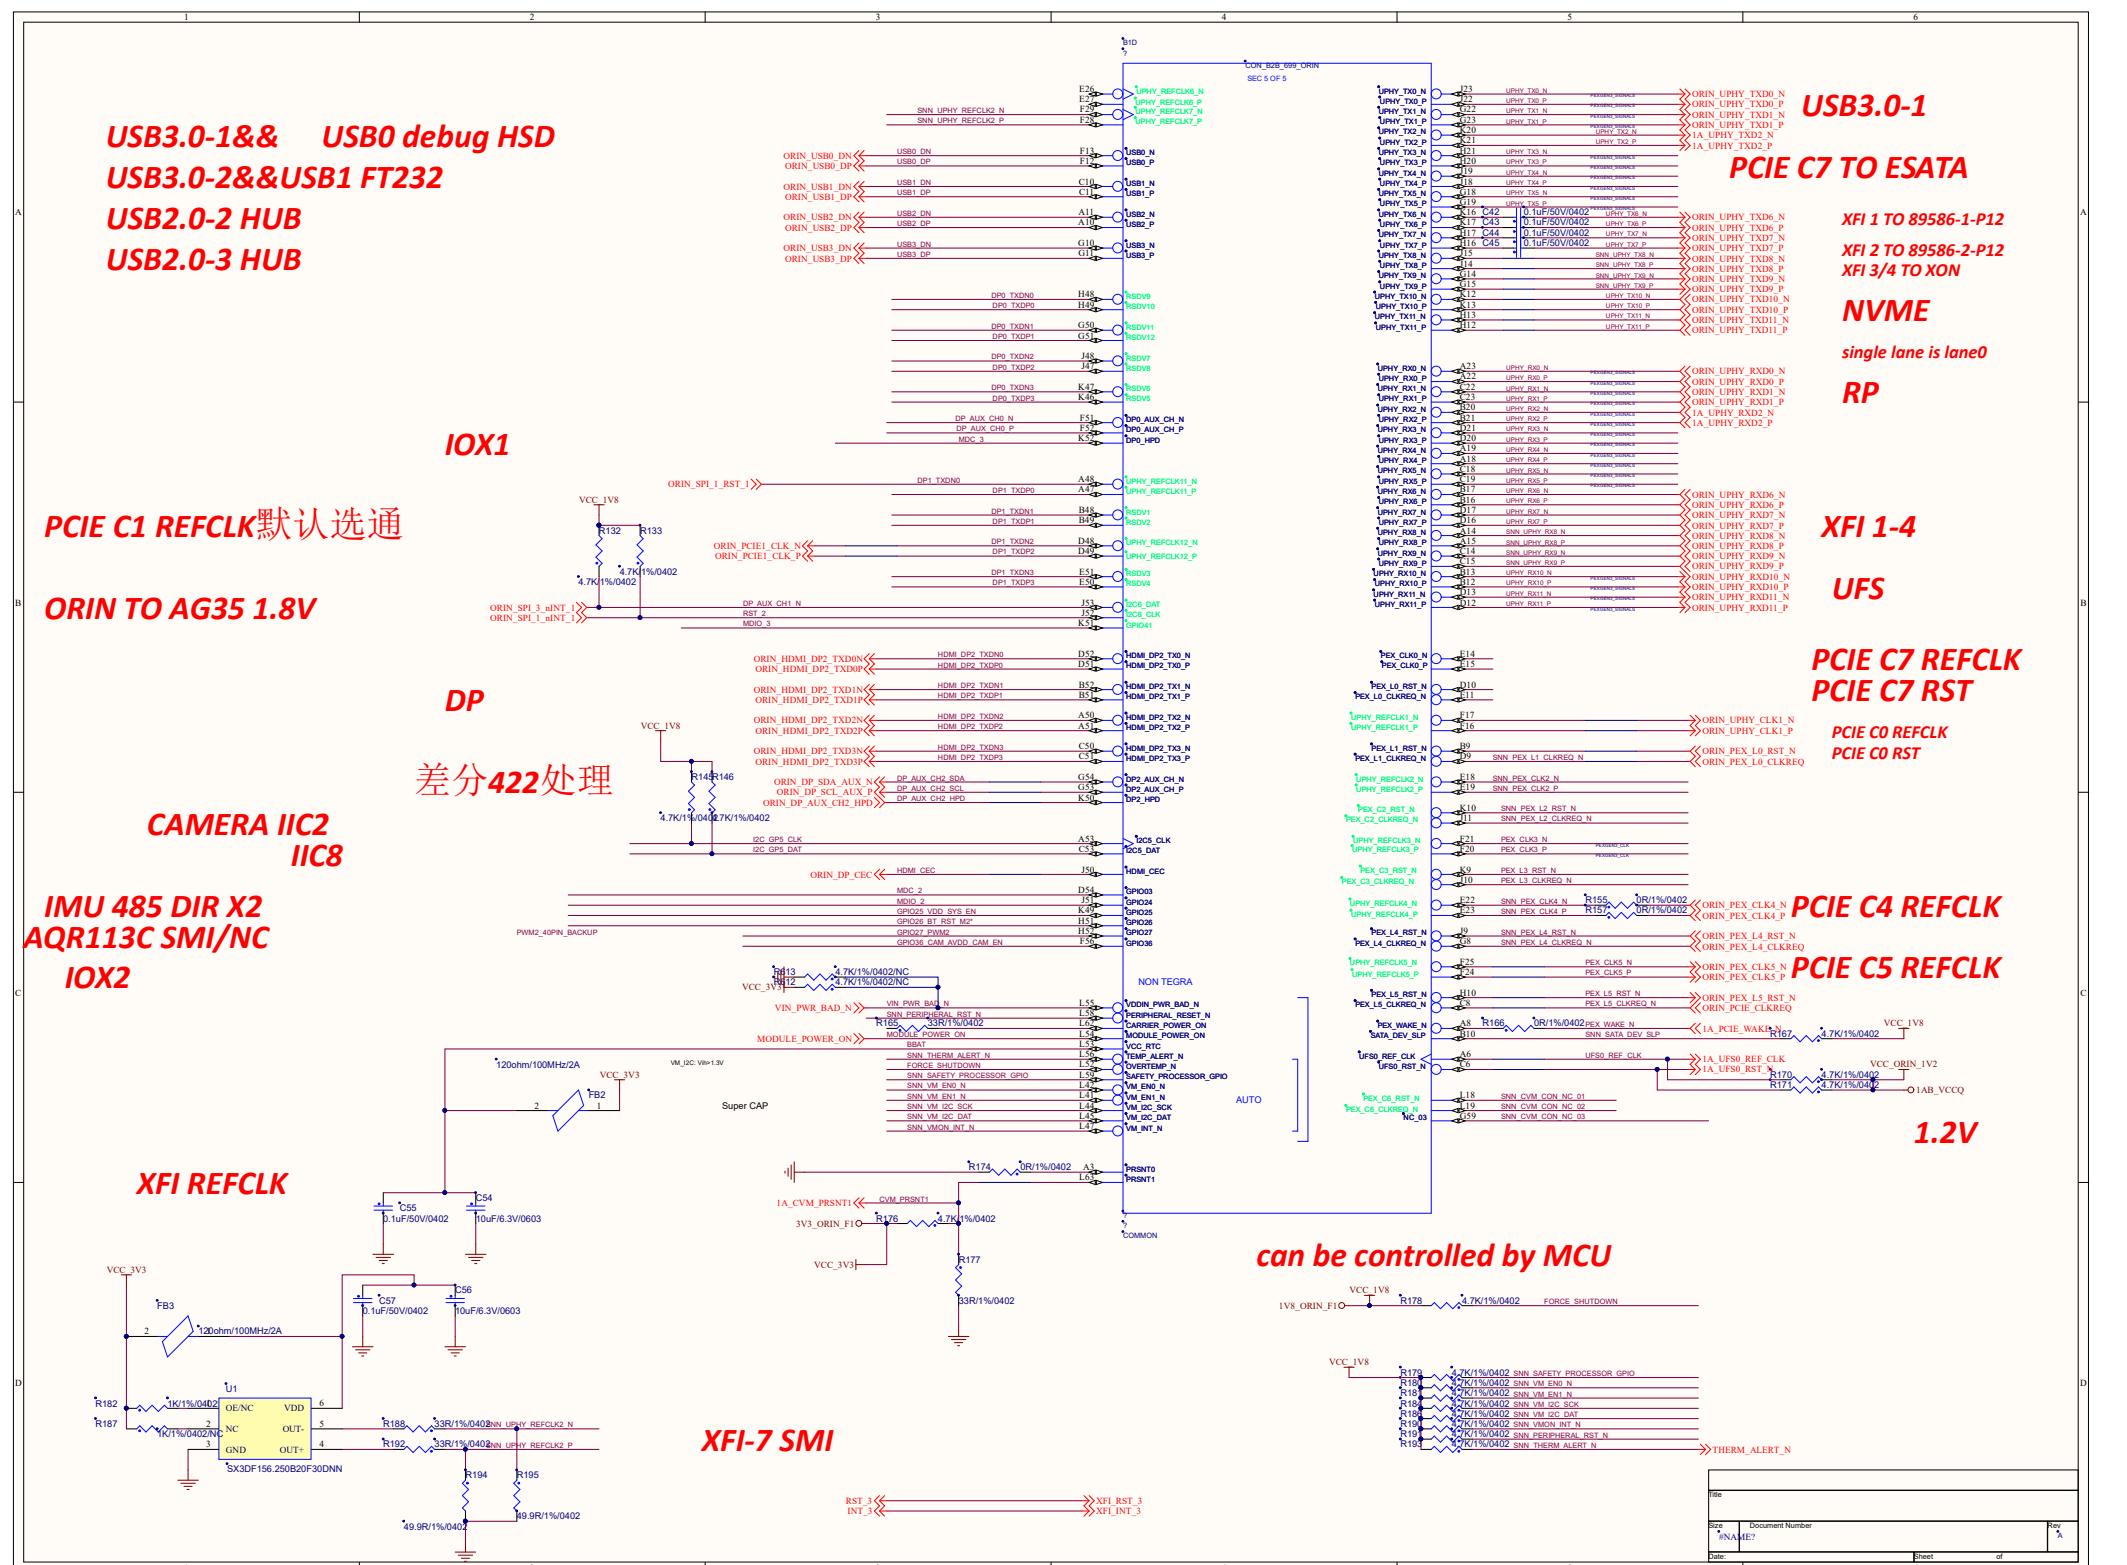

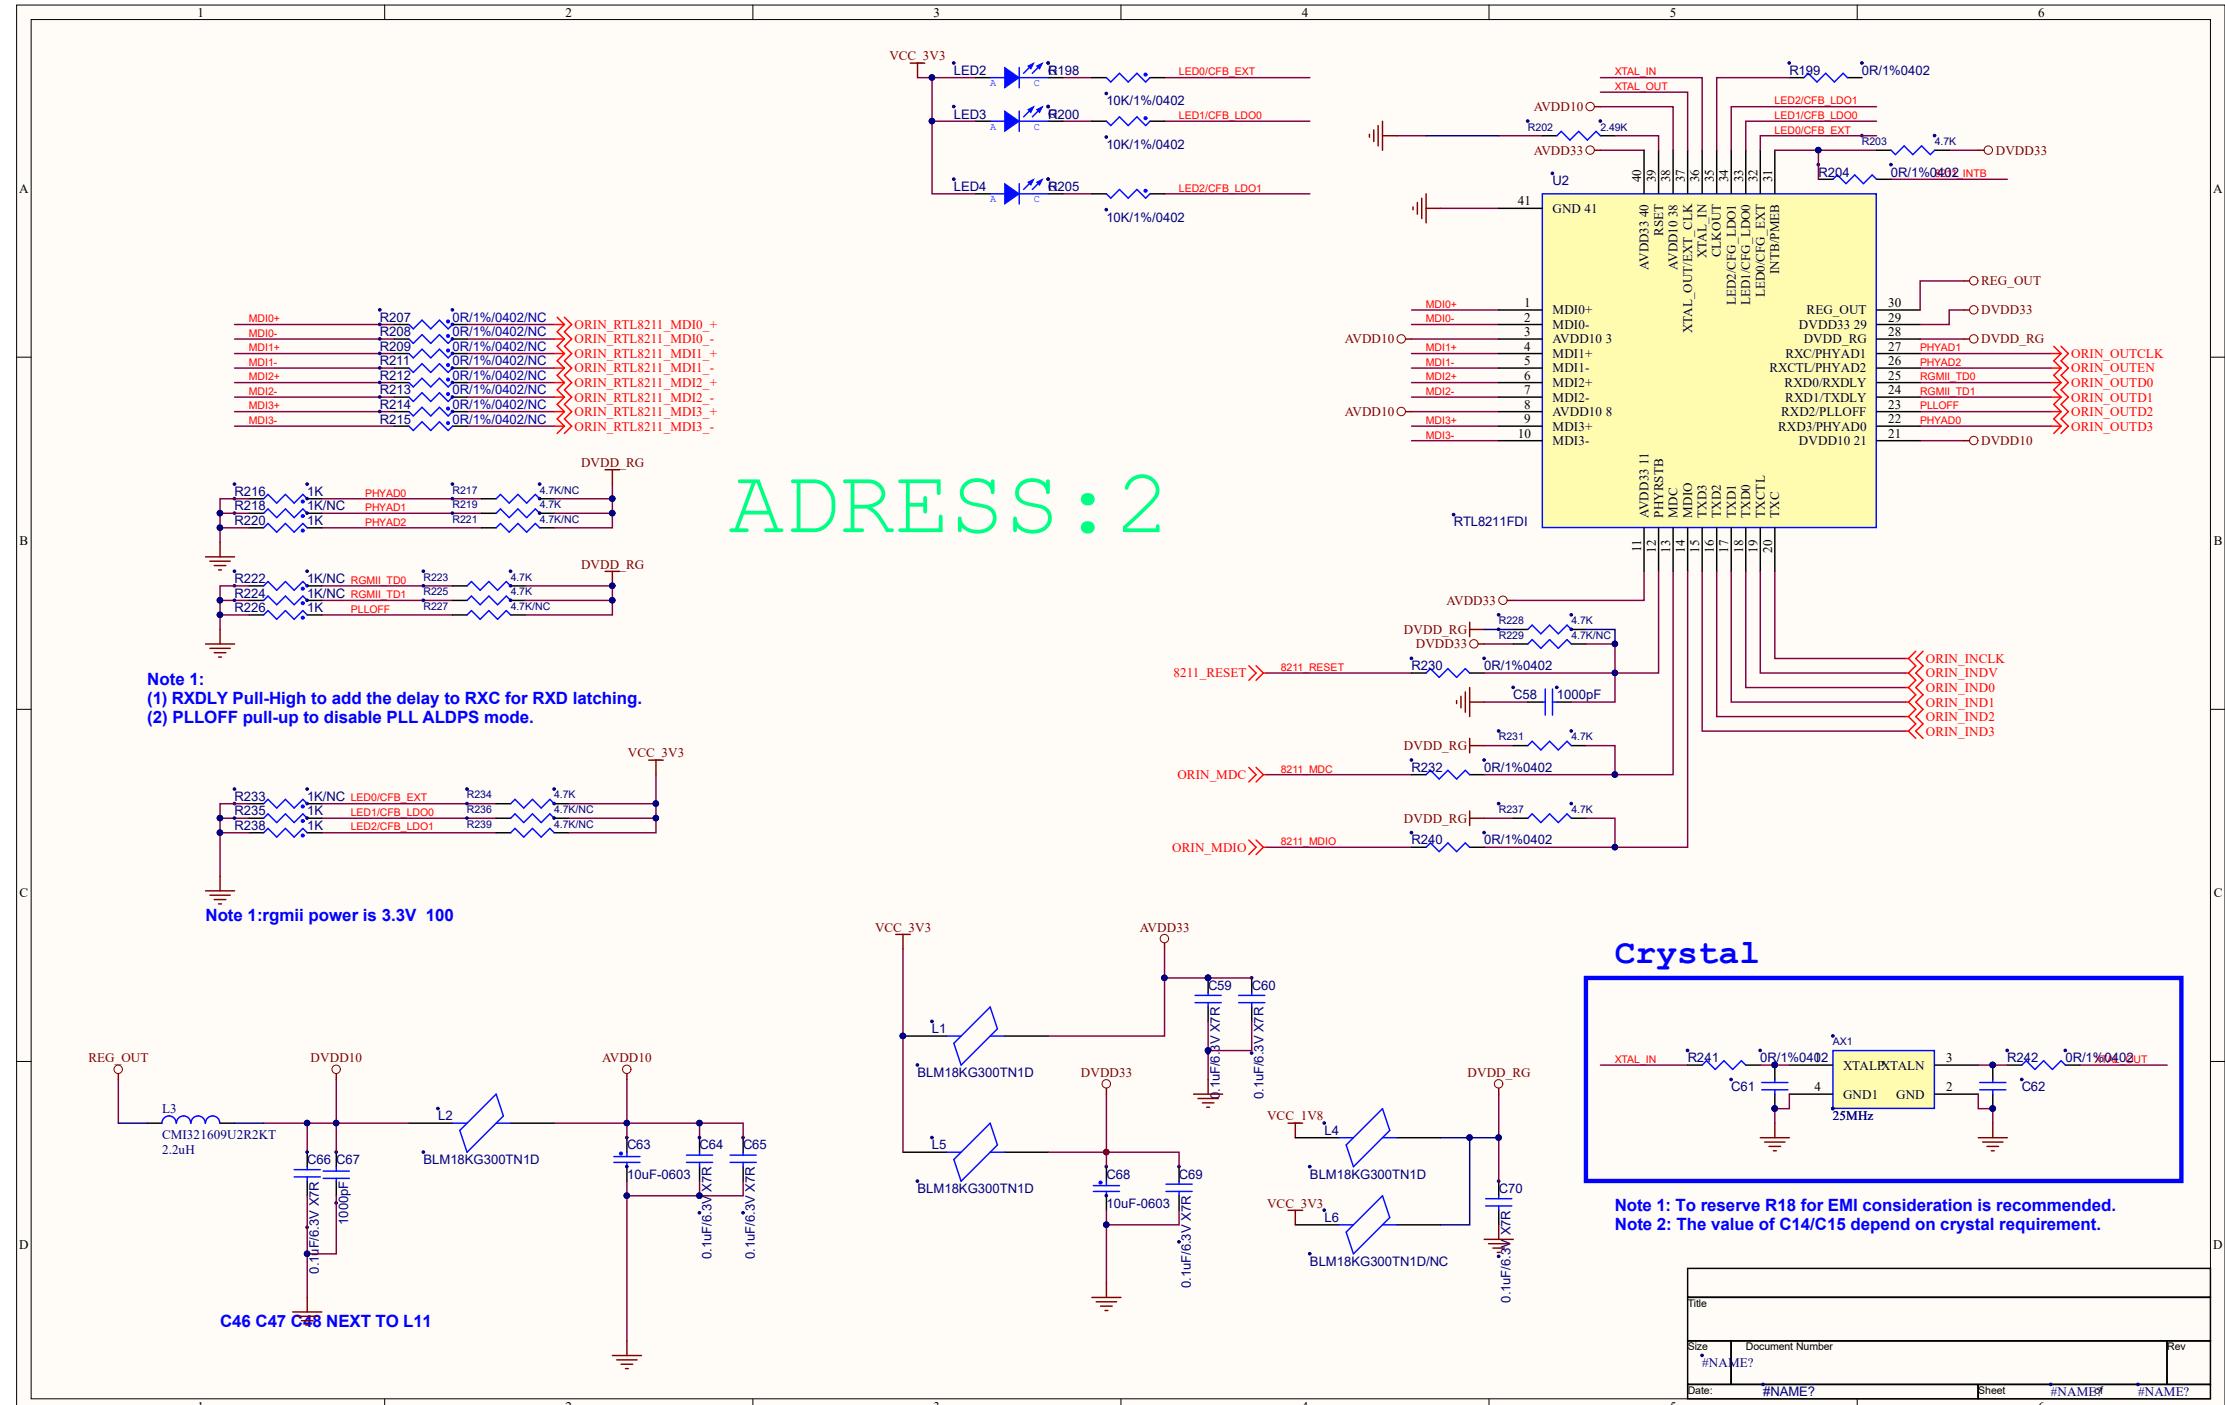


A

A

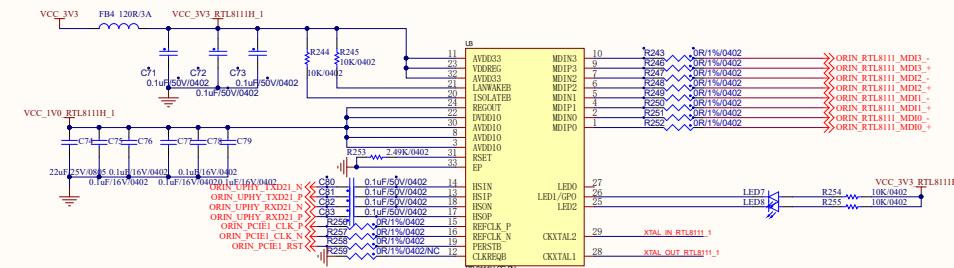

B


B




C

C

Title		
Size	Number	Revision
A2		
Date: 2024/2/17 File: D-project-06-RTL8111H-1.schdec	Sheet of 1	Drawn By

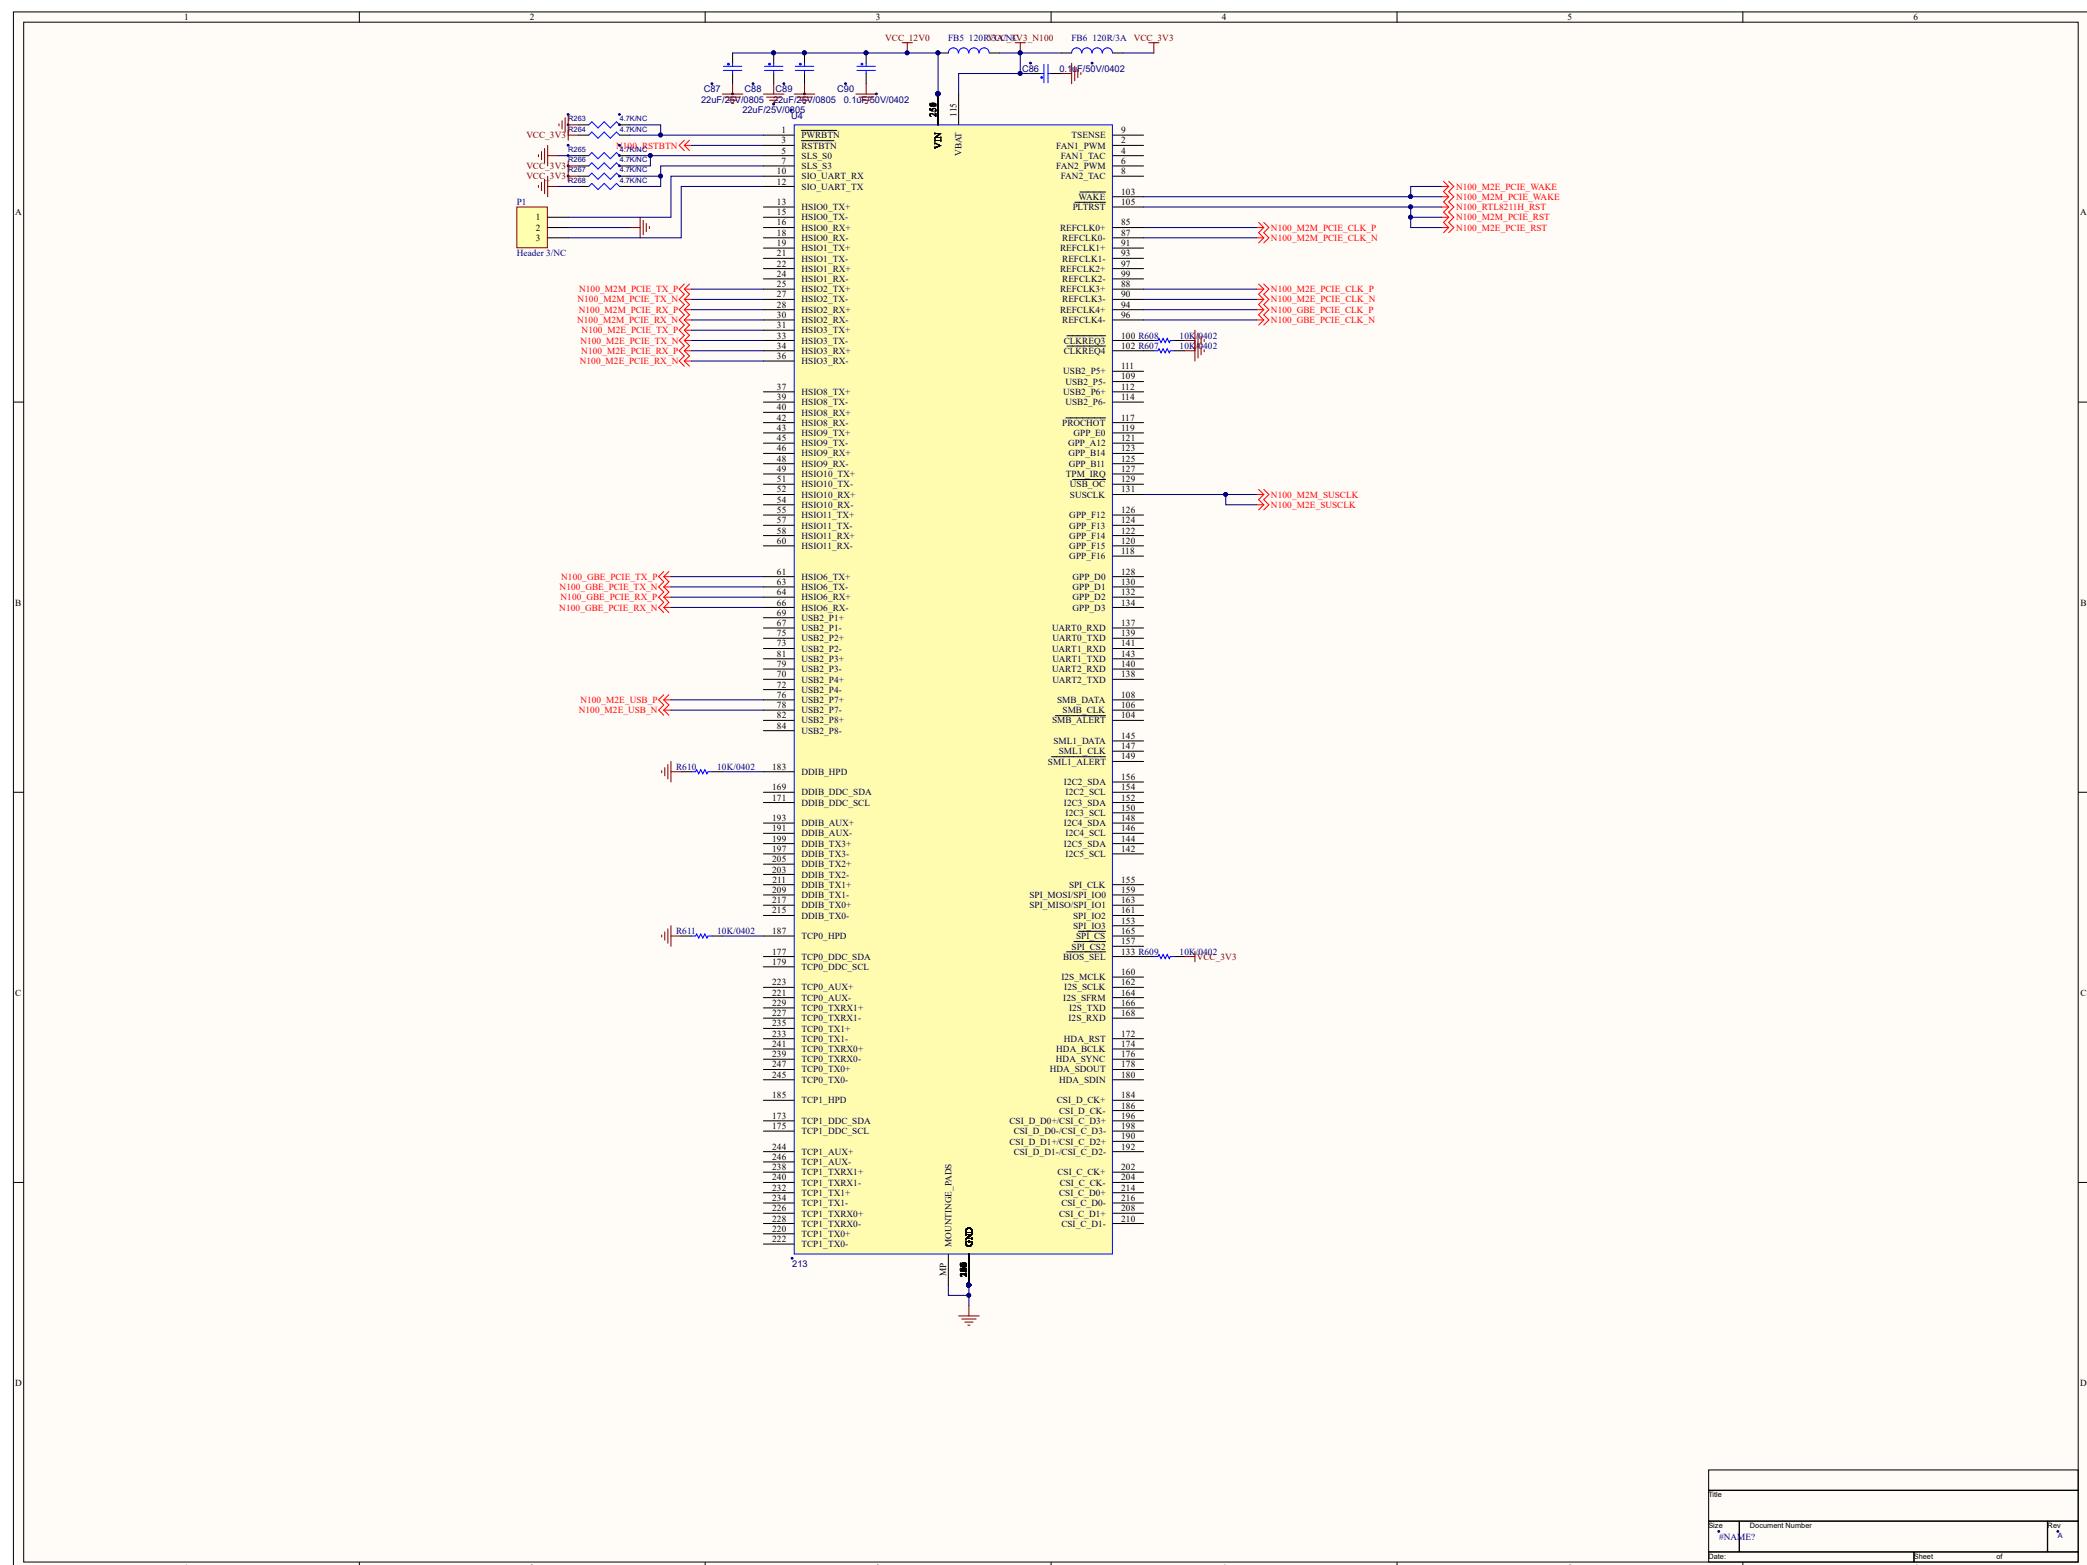


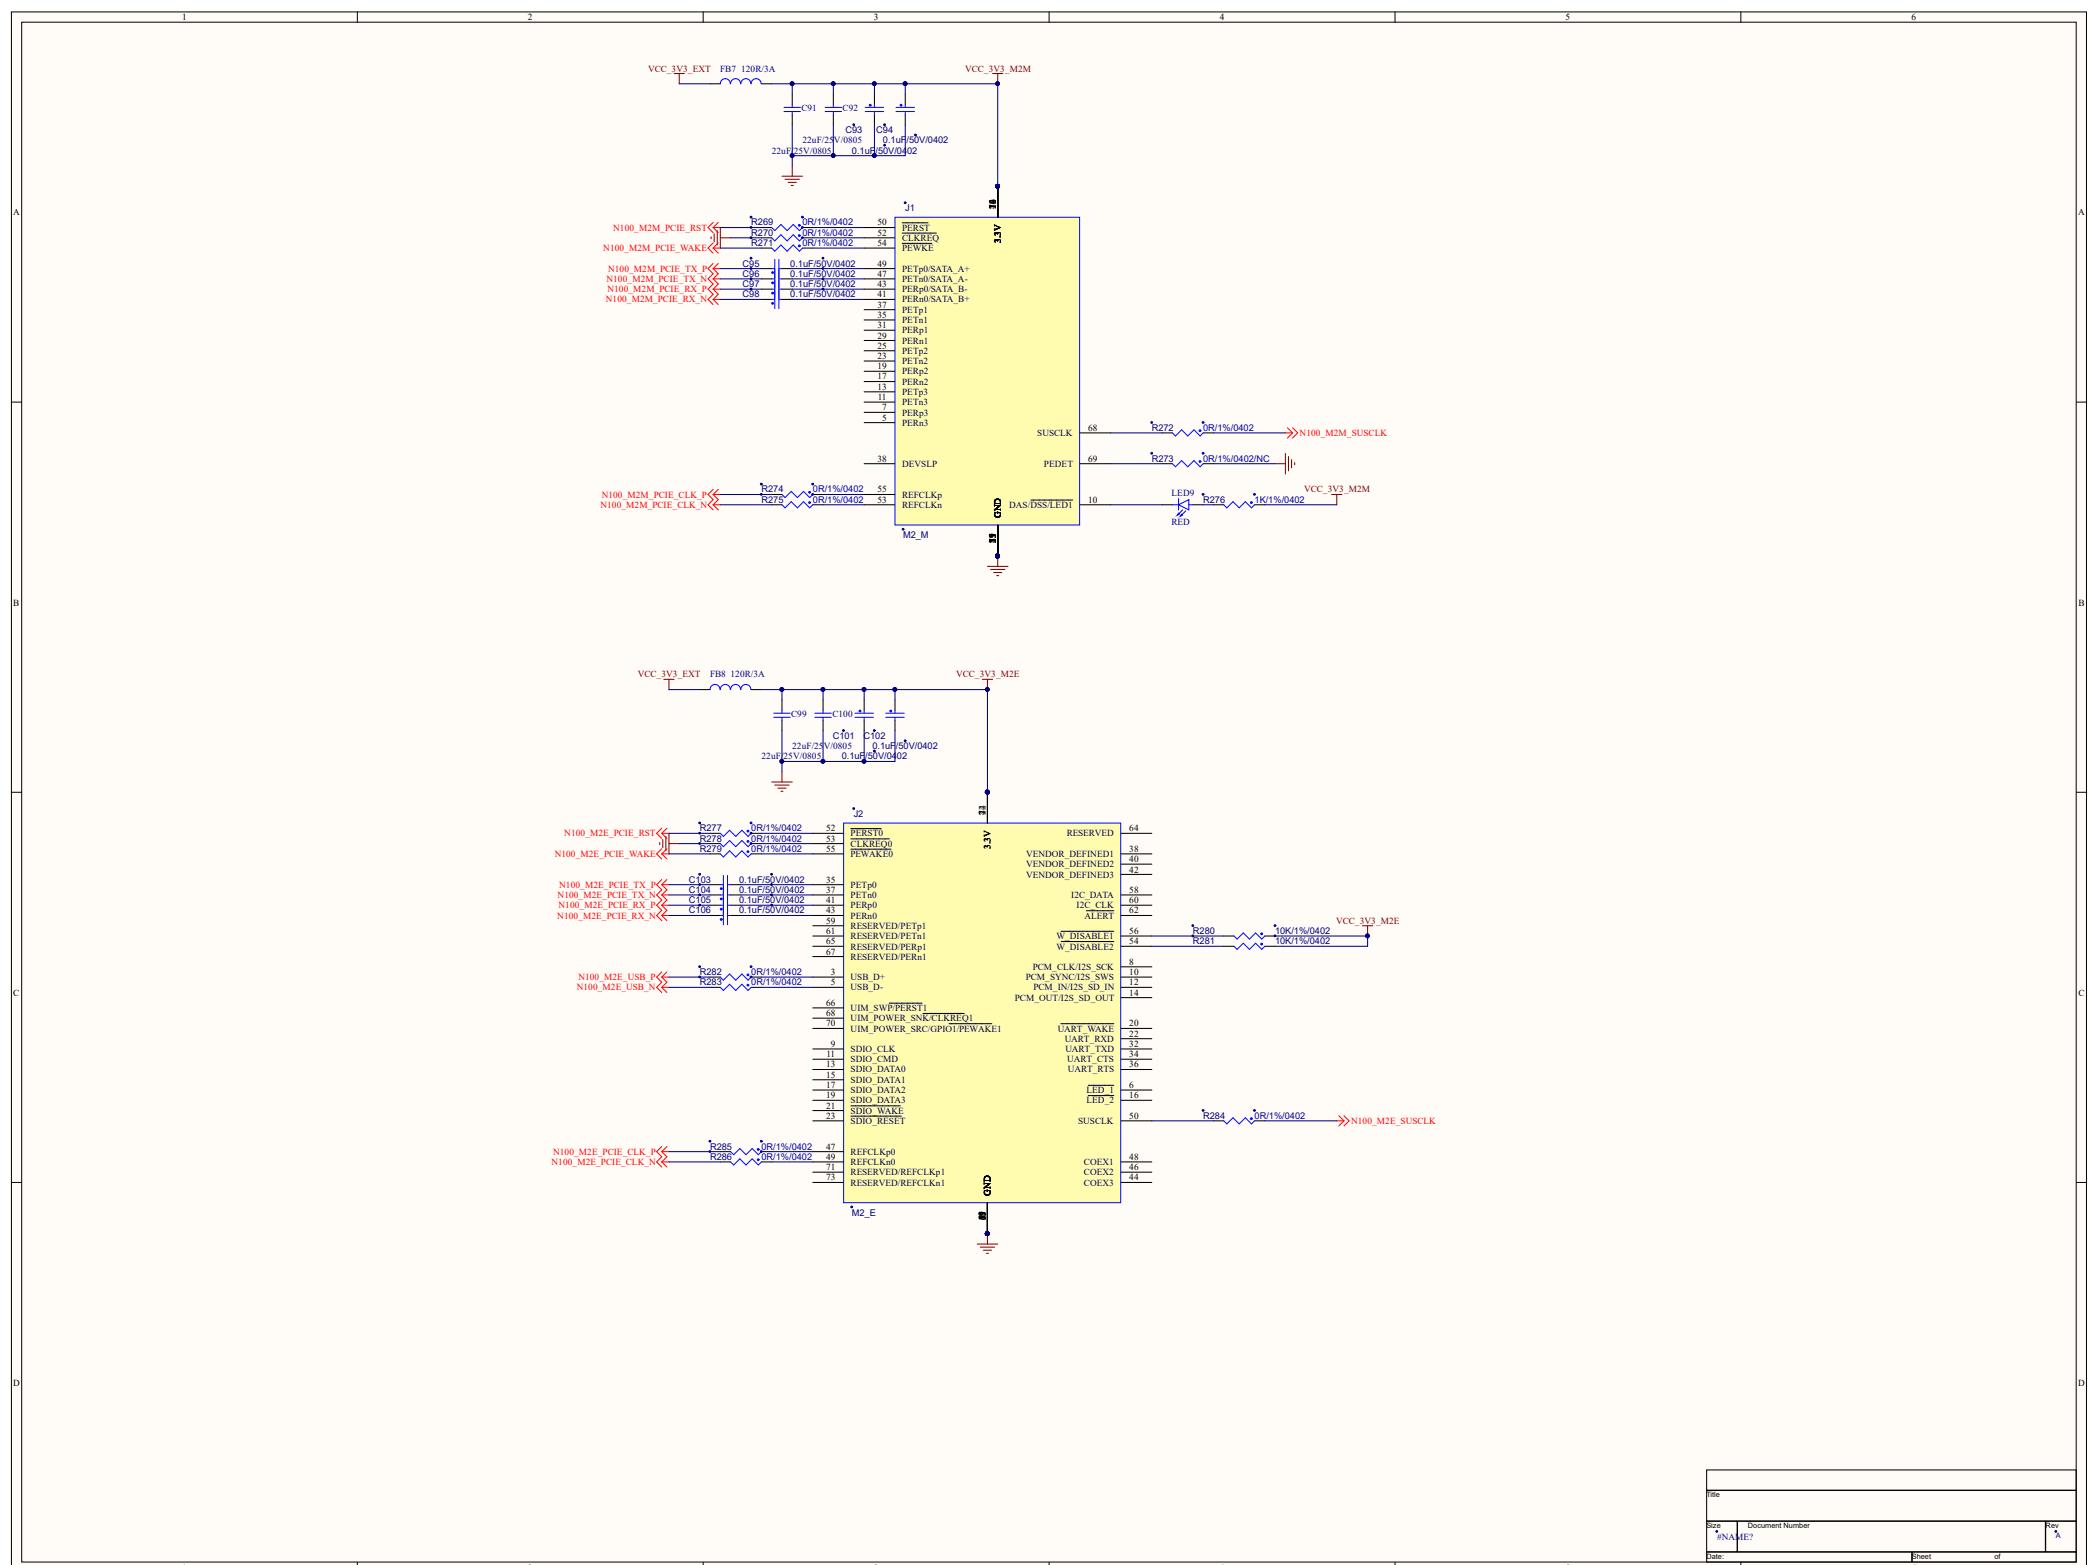

Date	Document Number	Rev
0000	NAME	X
Date	Sheet	of


A

A

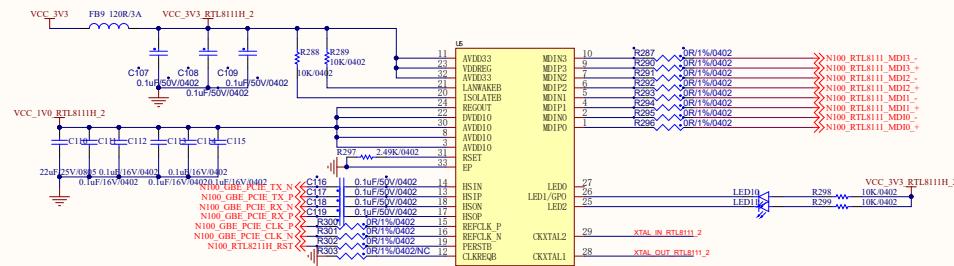


B

B

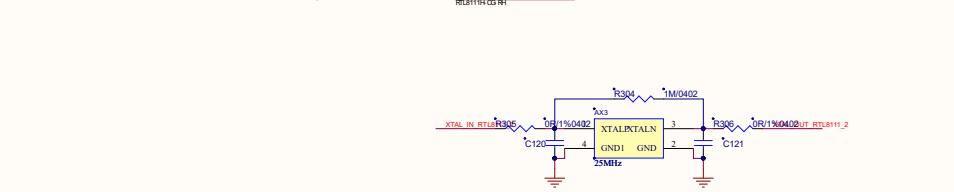

C


C




D

D

Title		
Size	Number	Revision
A2		
Date: 2024/2/17 File: D-project-09-RTL8111H-2.schdec	Sheet of 1	Drawn By

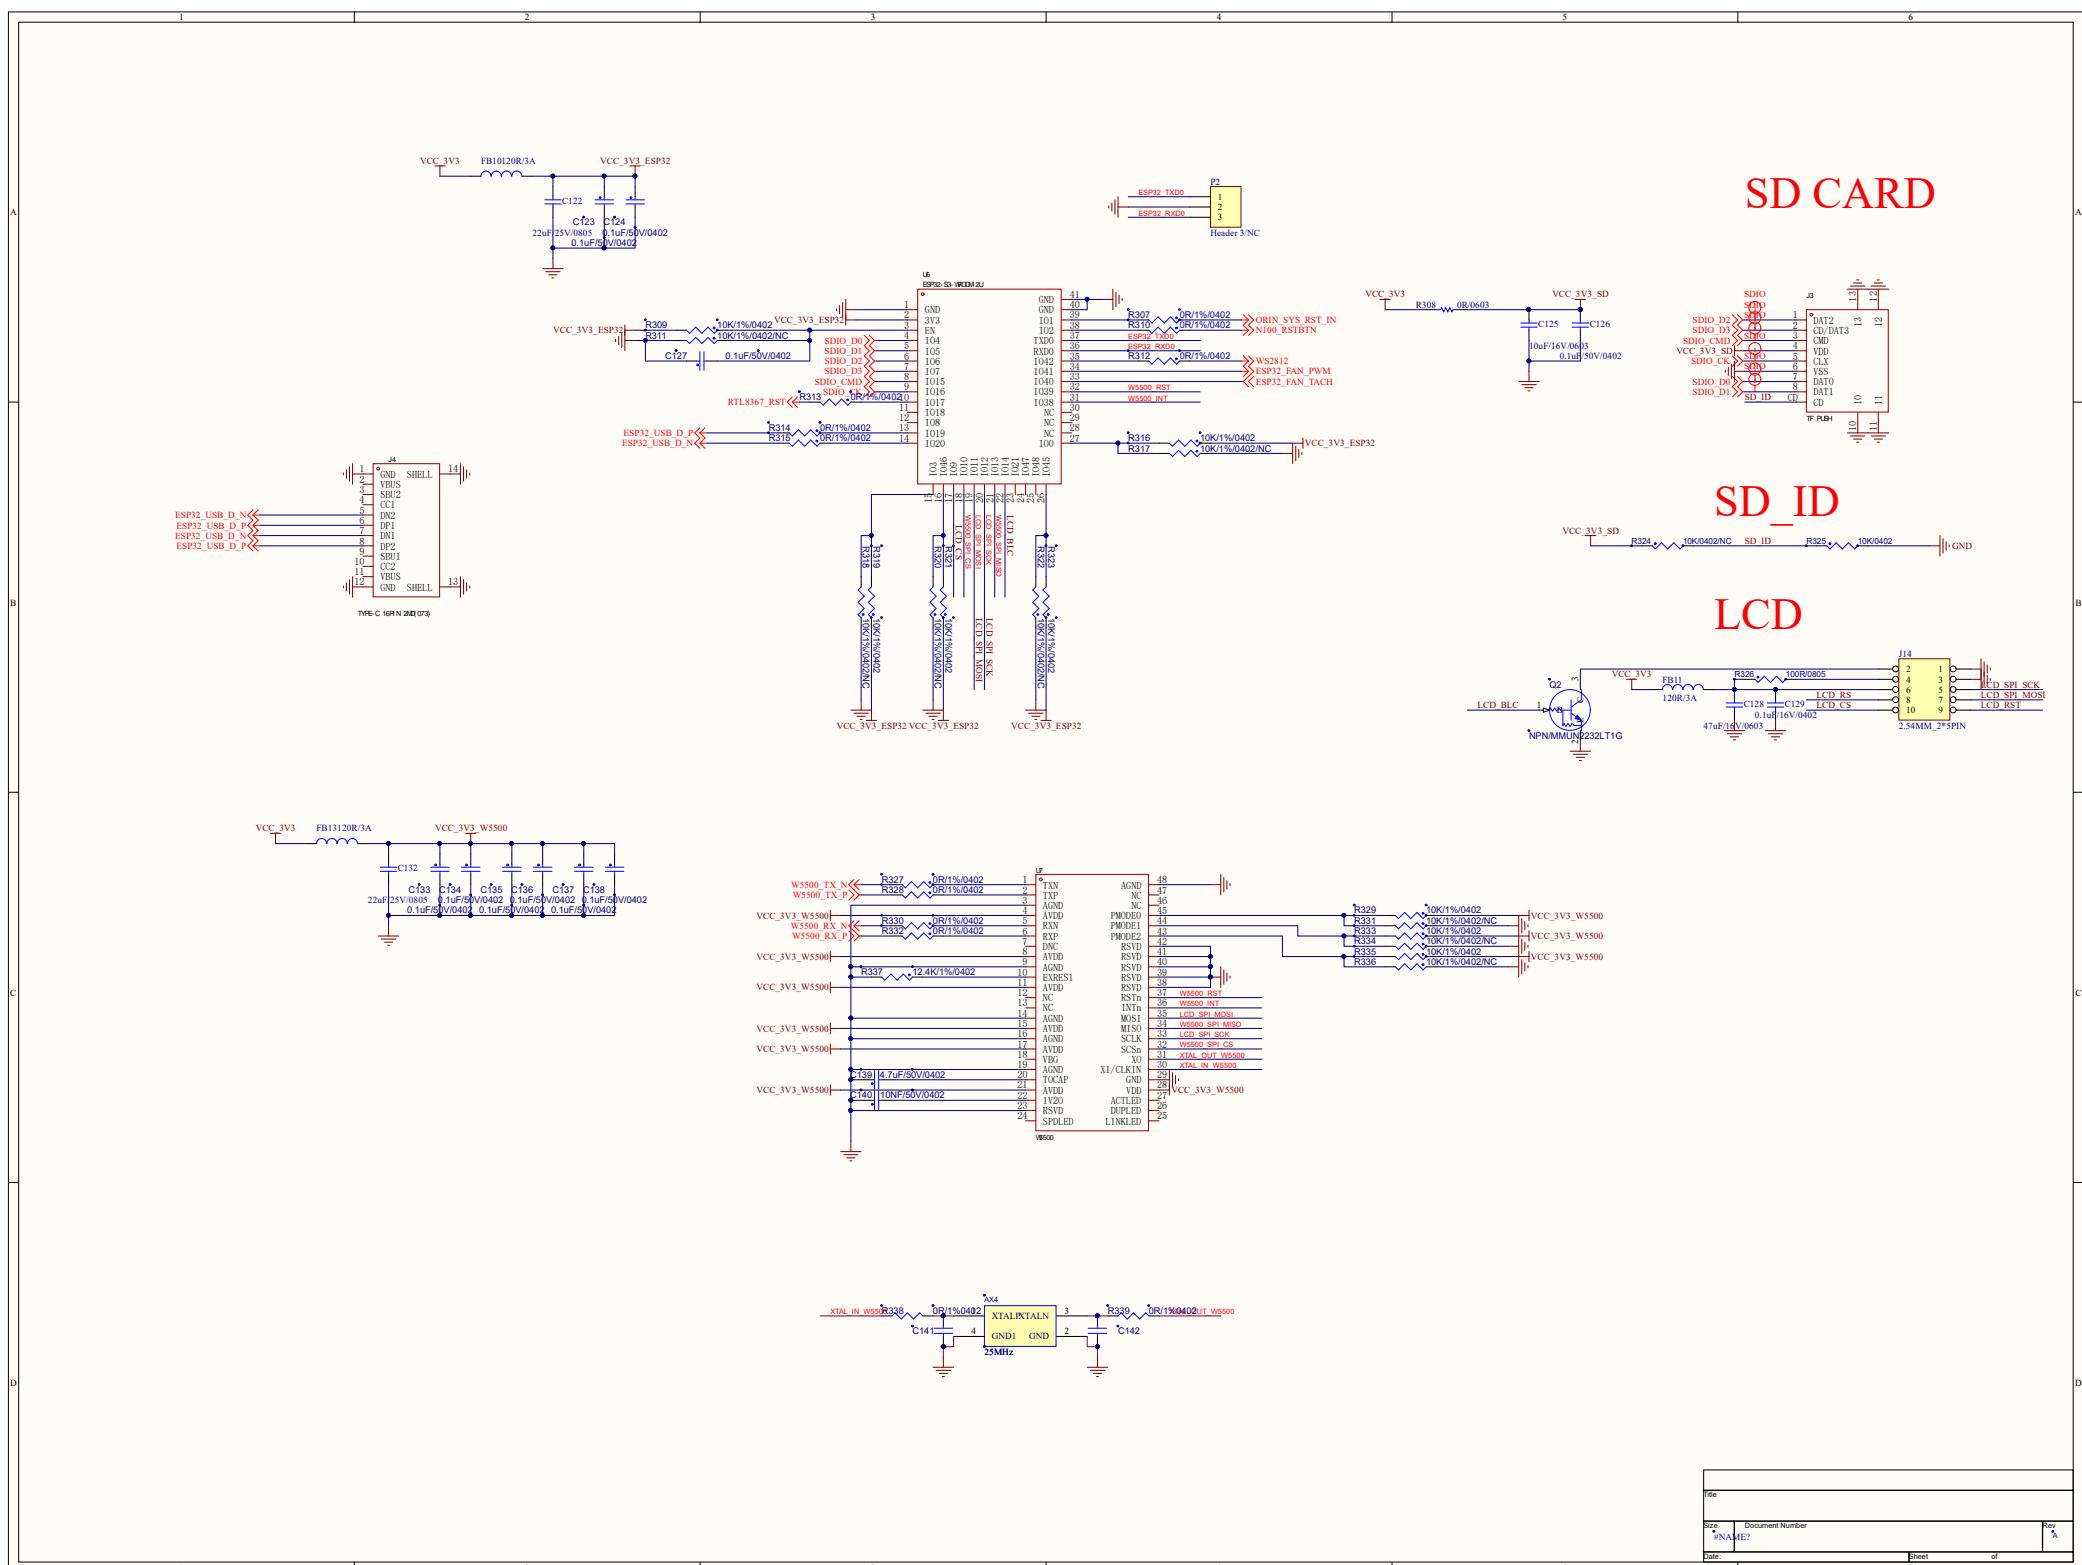

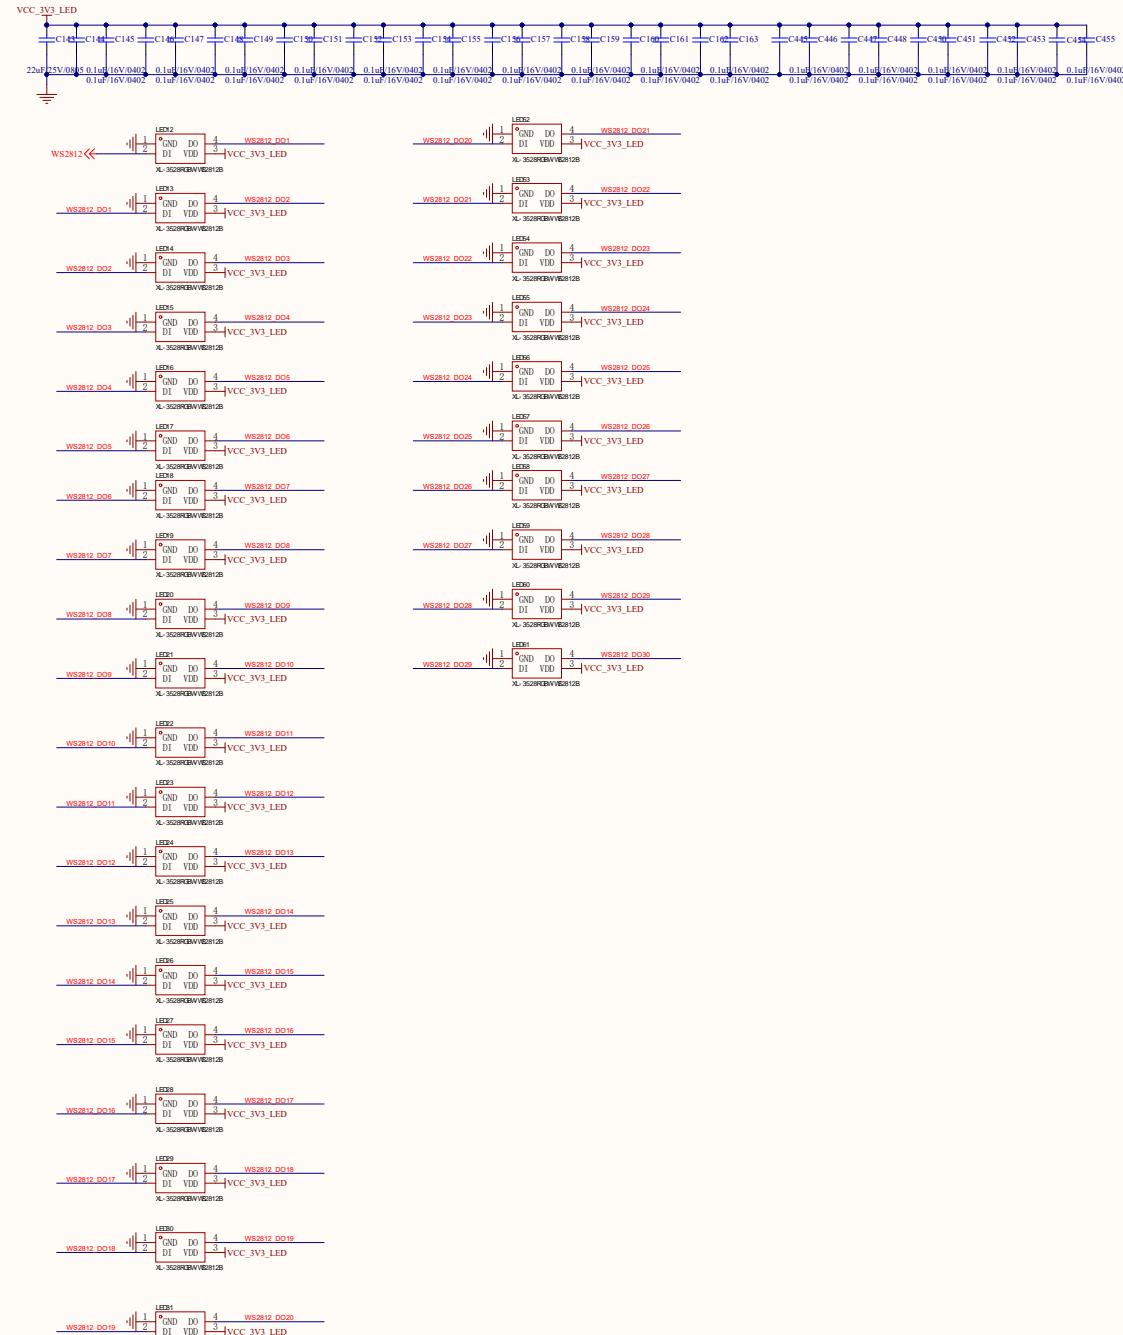

Title		
Size	Number	Revision
A2		
Date: 2024/2/17 File: D:\project\11-LED.schdoc	Sheet of 1	Drawn By

A

A

B


B

C


C

D


D

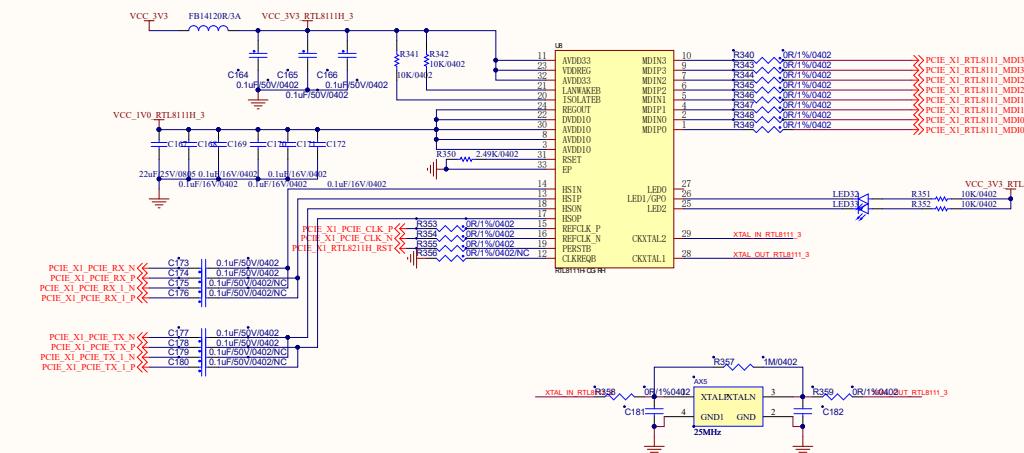


Title		
Size	Number	Revision
A2		
Date:	2014/2/17	Sheet of
File:	D:\project\112-RTL8111H-3.schdec	Drawn By

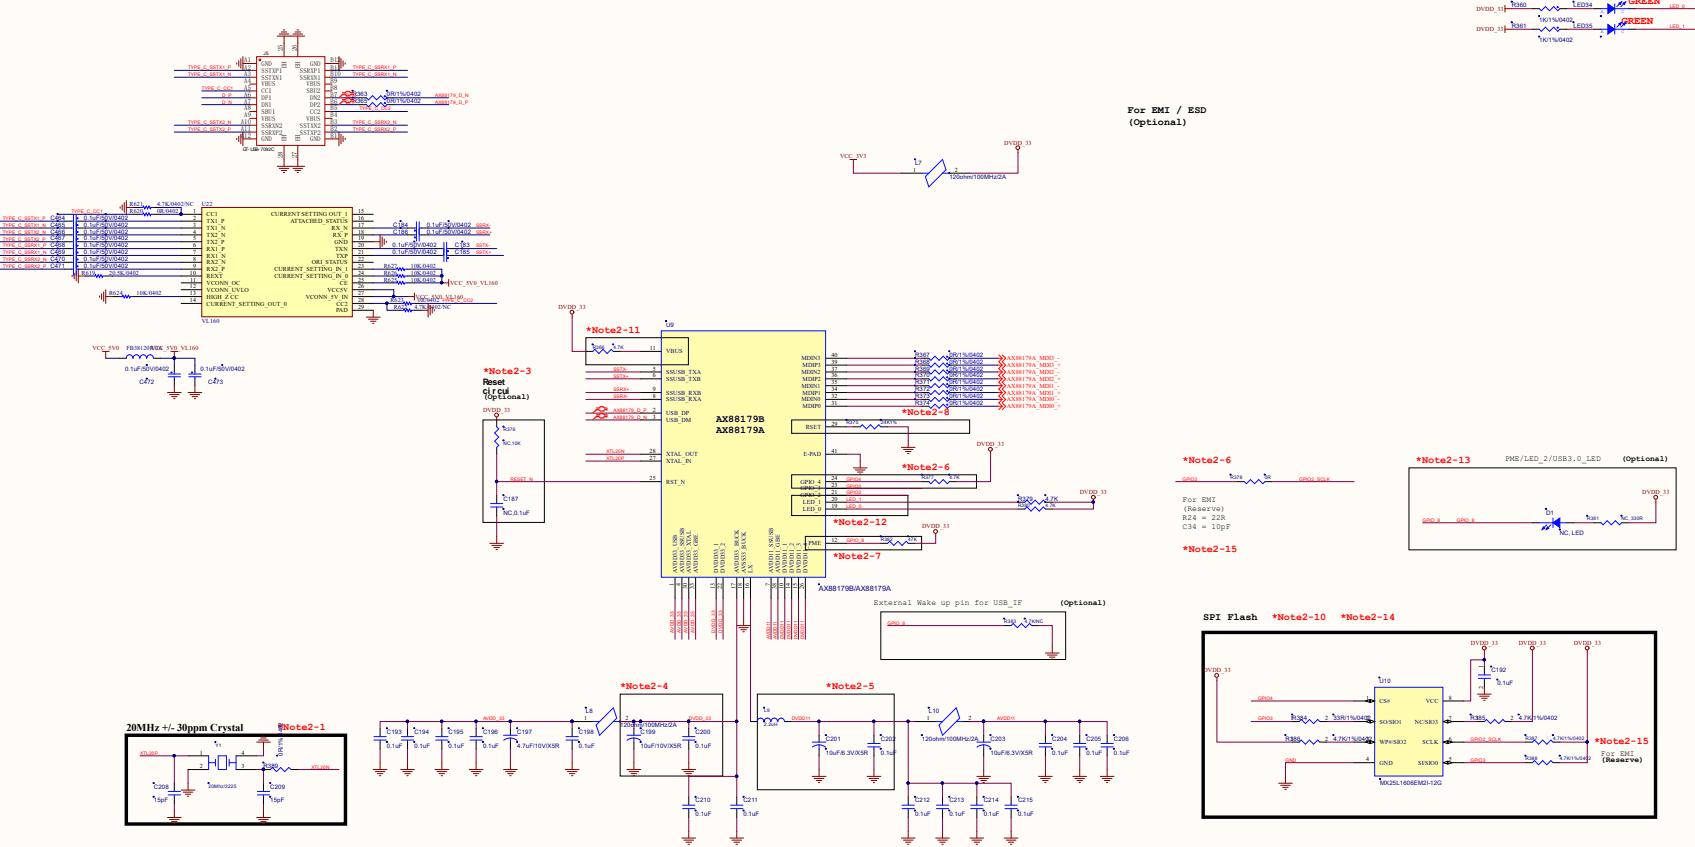



RTL8010A Reference Design
PCB: 100% Copper, No ESD protection, Solder mask, Infrared, THT, Wave soldering, Tin, Tin/Lead, Tin/Lead-Free, Lead-Free
IC: 100% Lead-Free
NAME: RTL8010AA Reference Design
PCB: 100% Copper, No ESD protection, Solder mask, Infrared, THT, Wave soldering, Tin, Tin/Lead, Tin/Lead-Free, Lead-Free

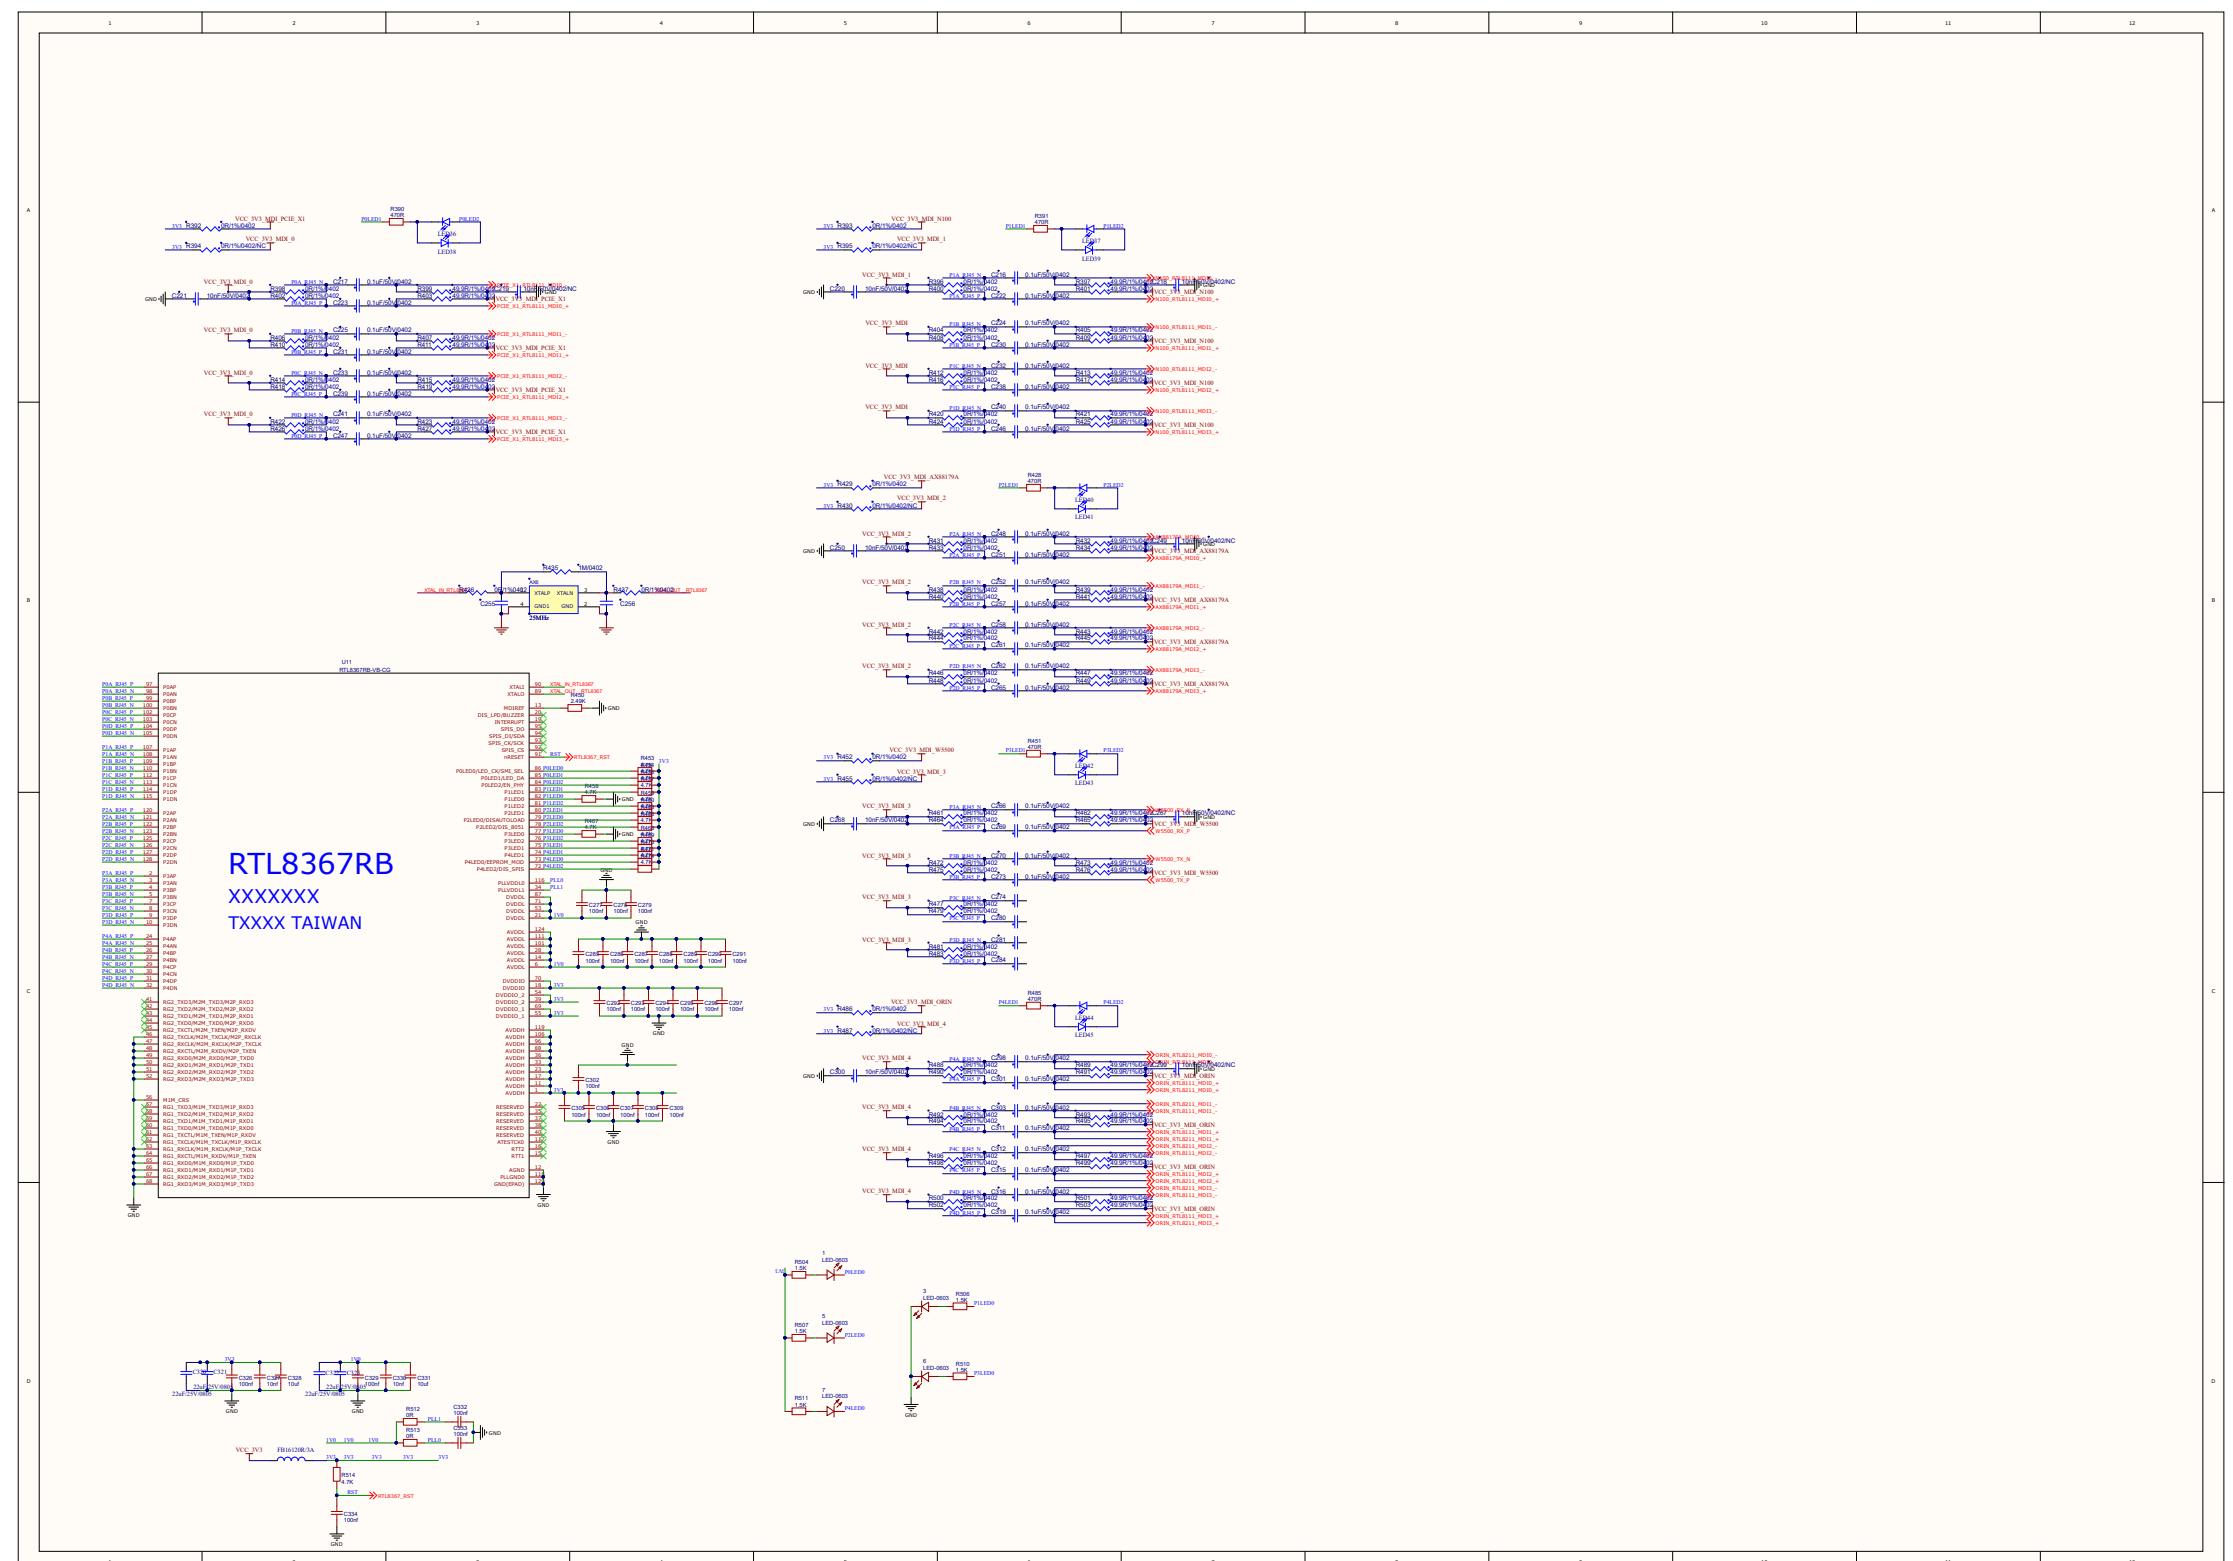

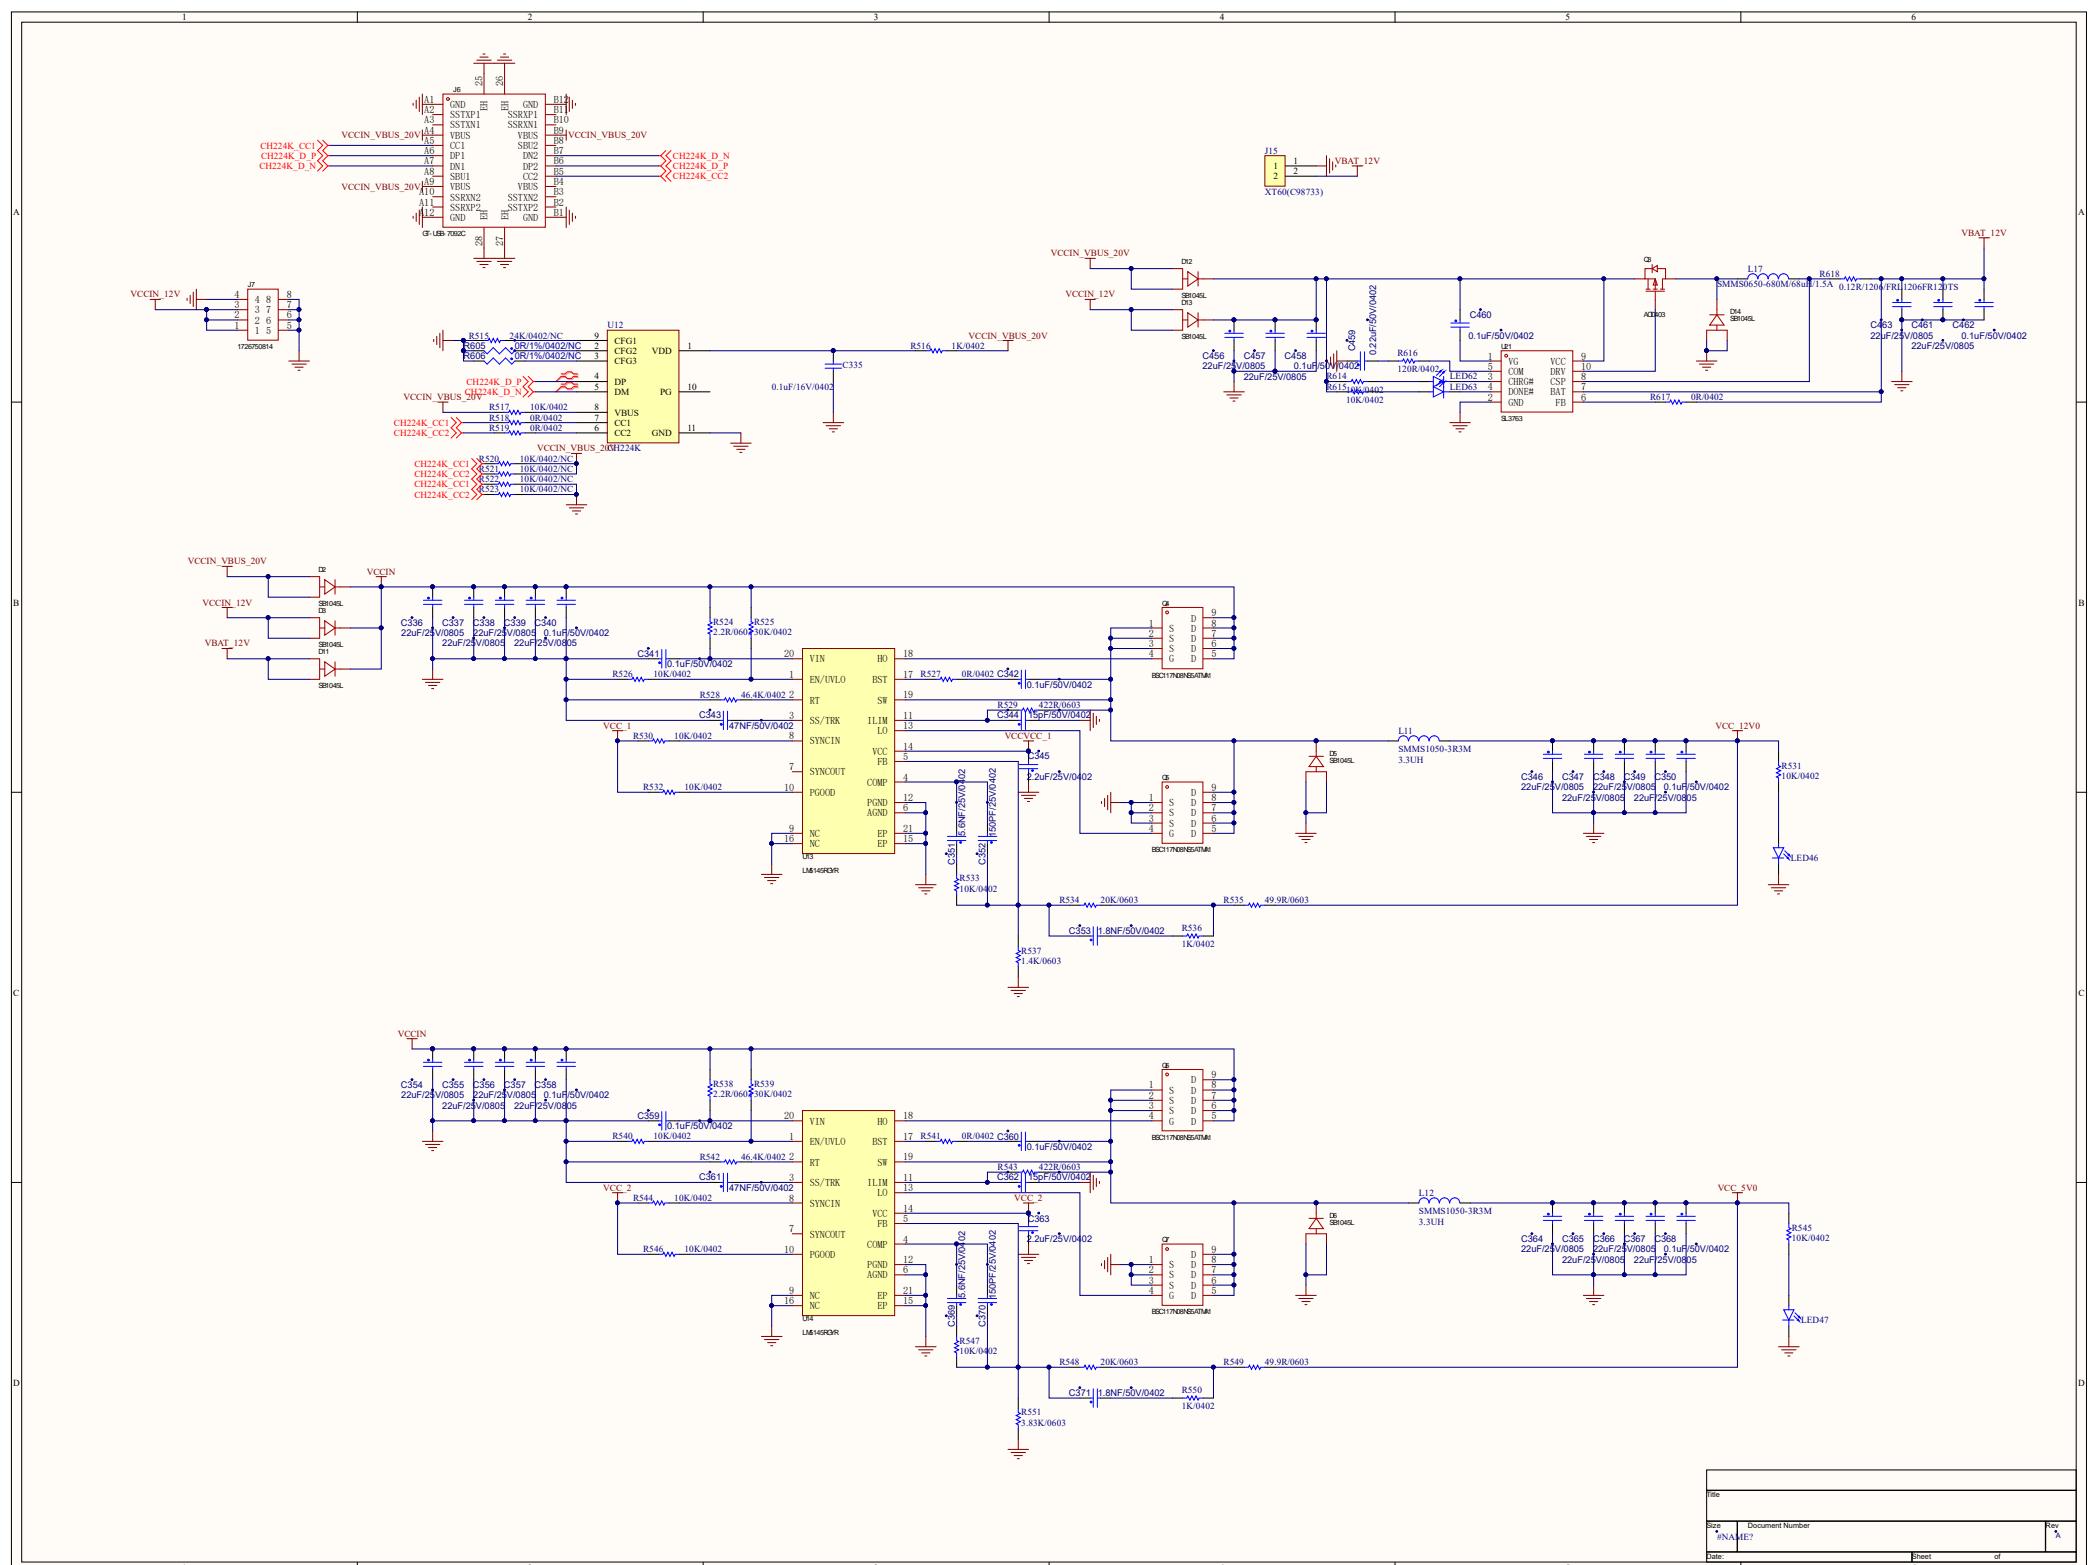

Date:	
Rev:	X
Doc. Number:	

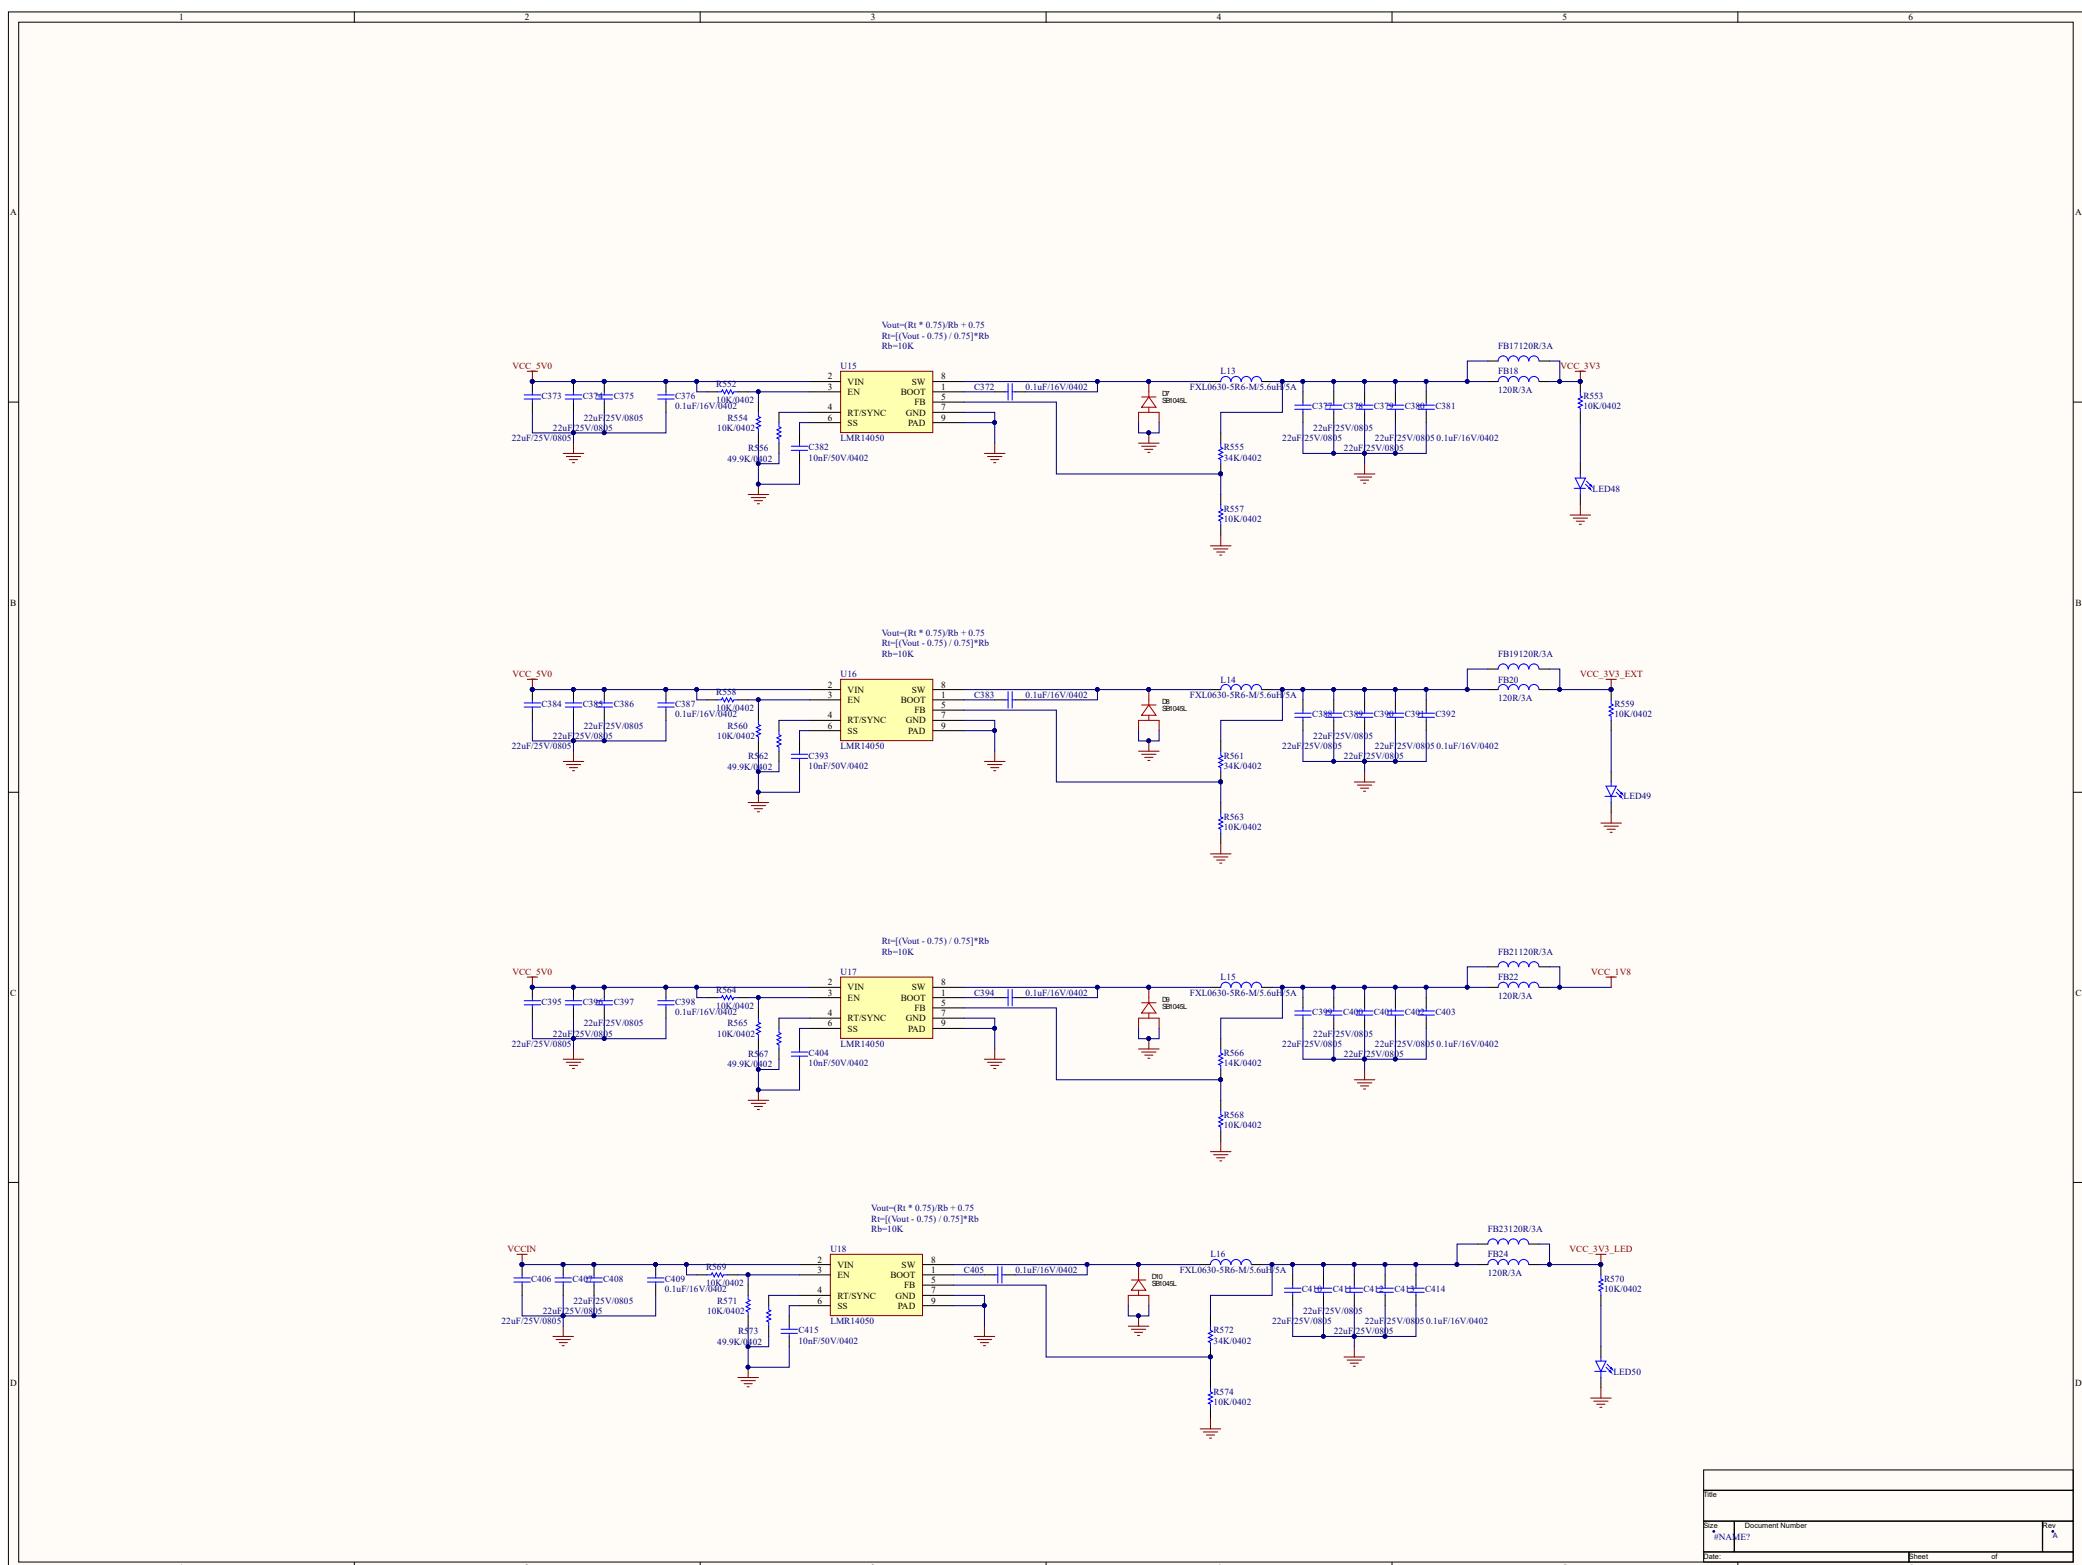

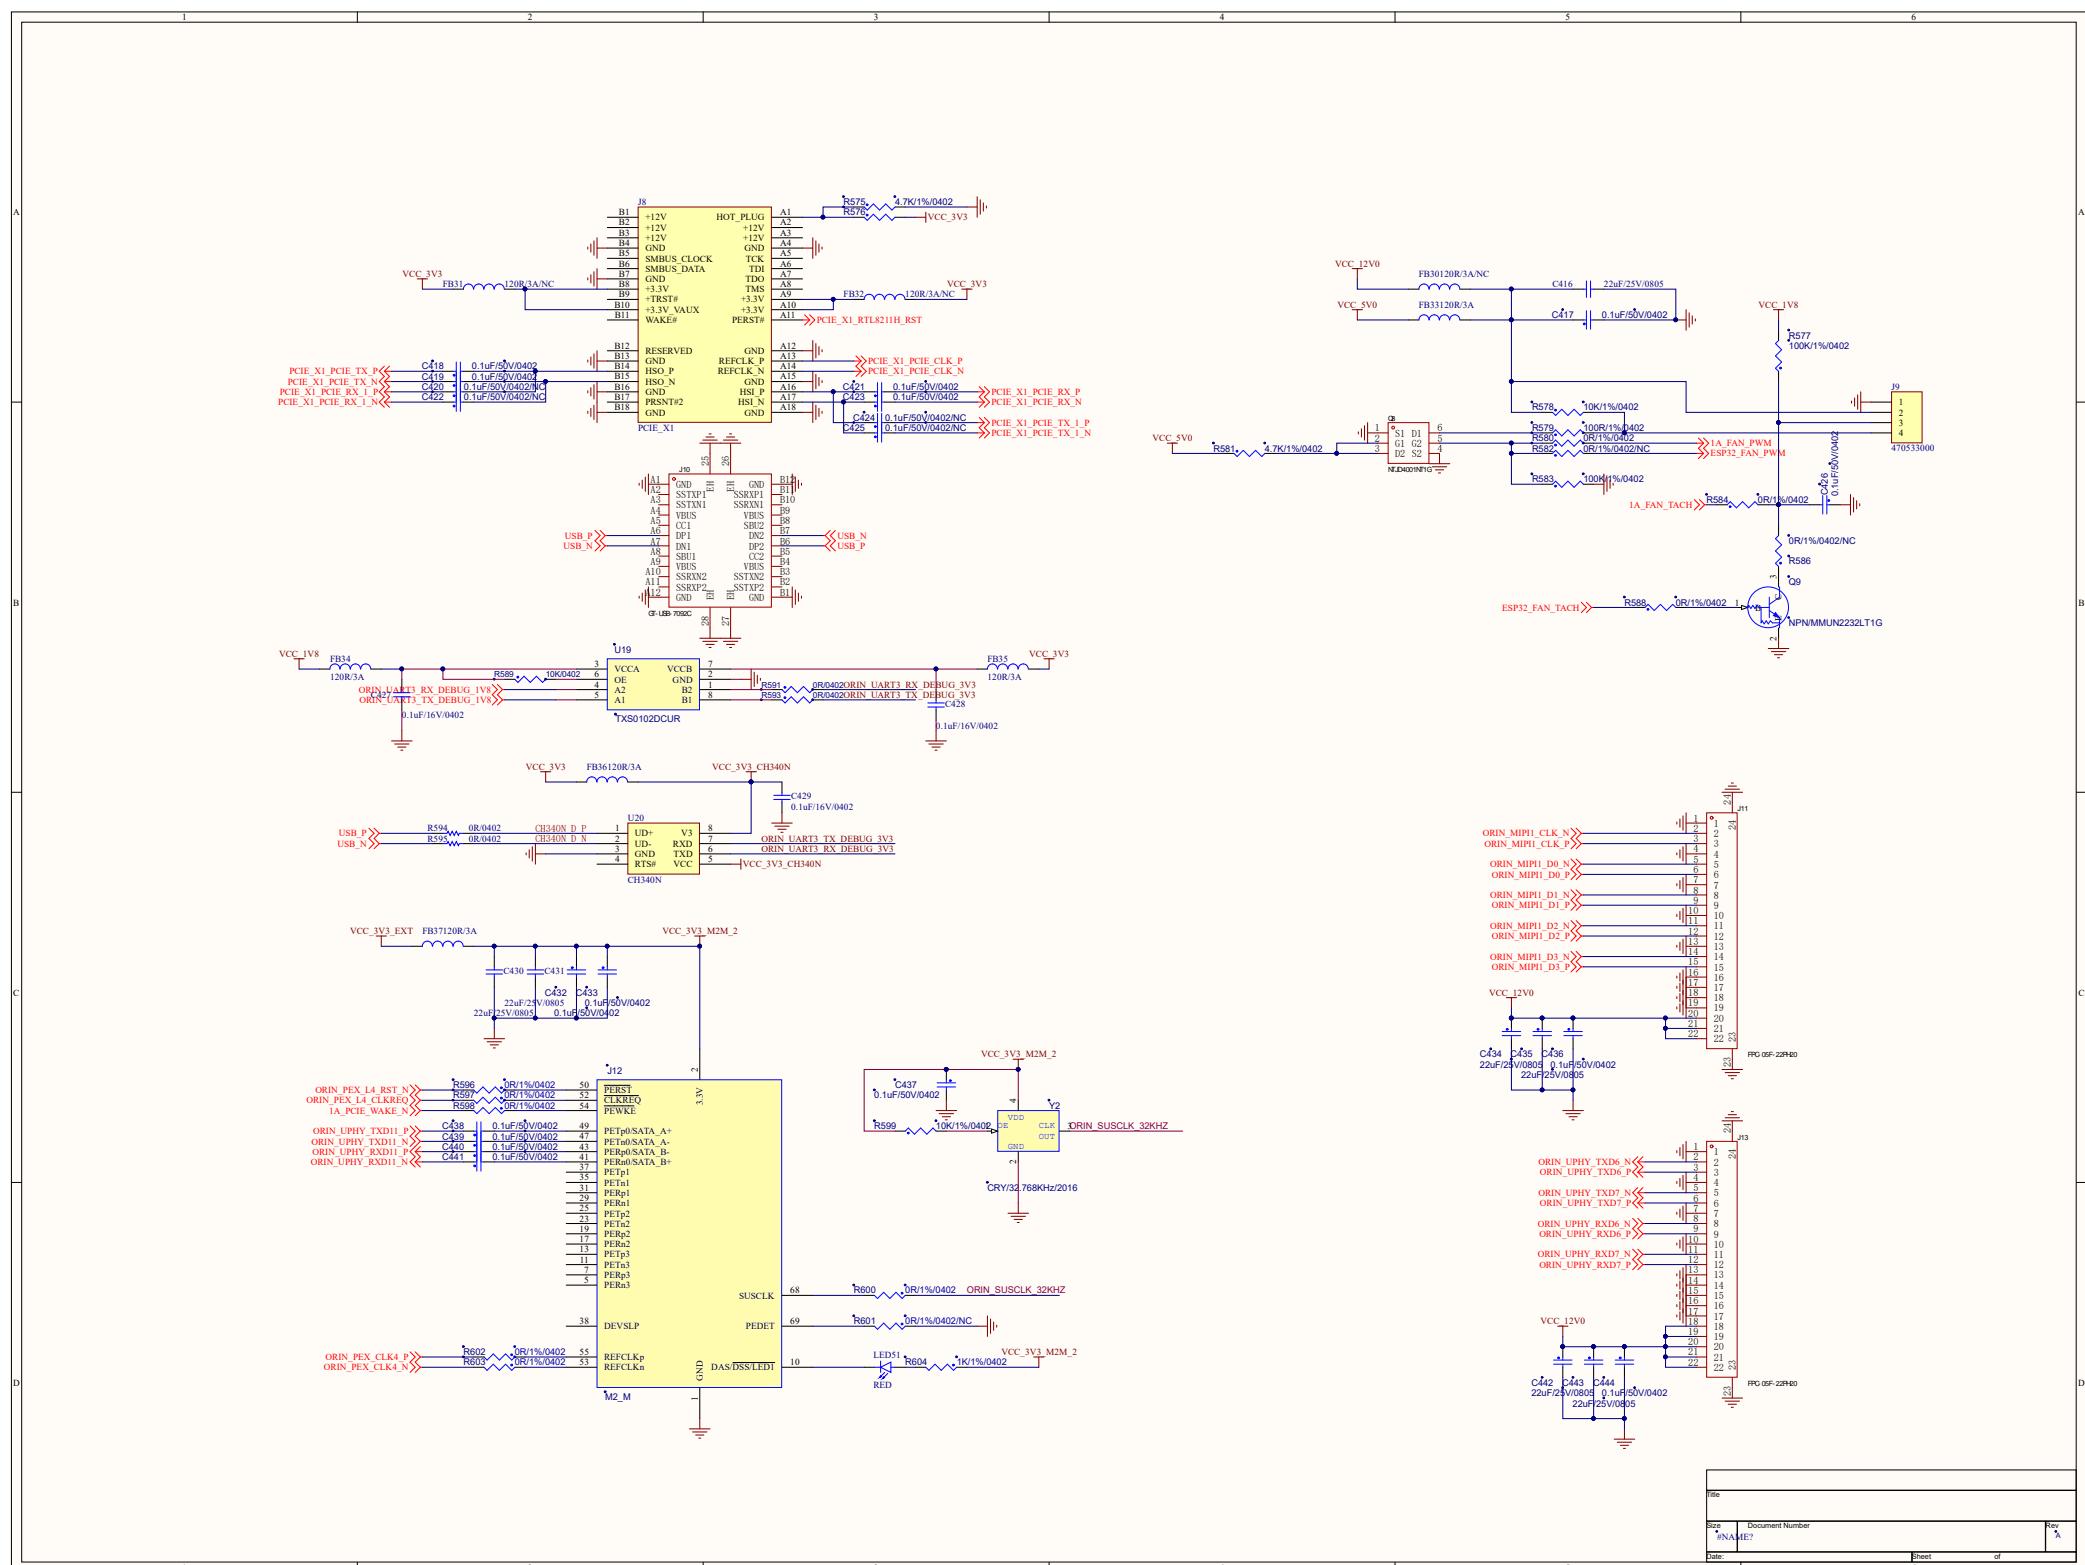

Page	Document Number	Rev
1	NAME:	X