




DWM1000

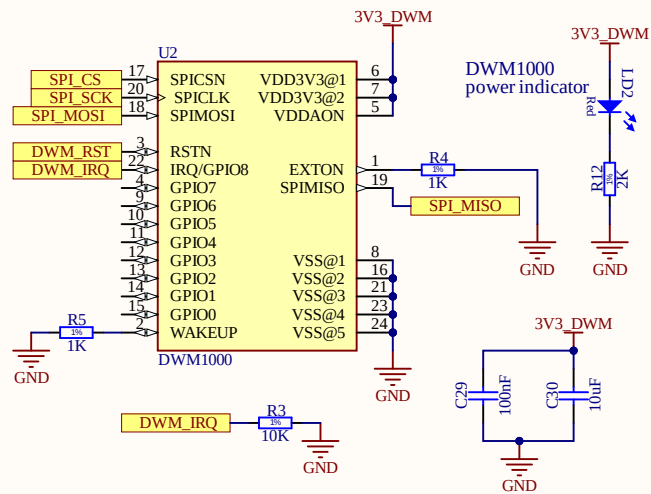



IMU

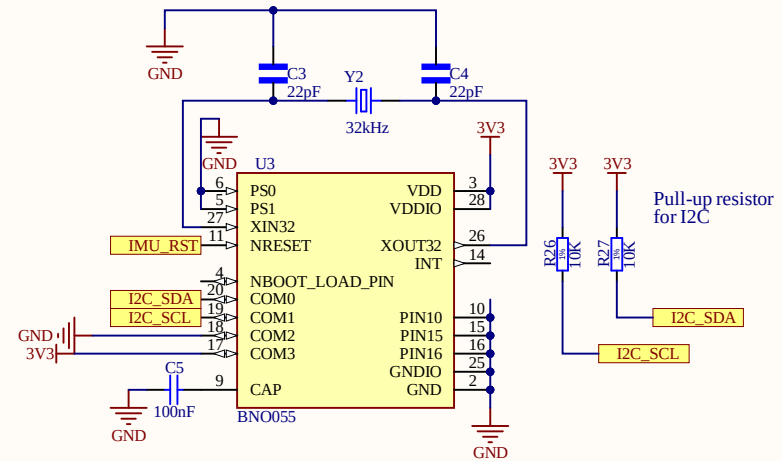

Title		
Size	Number	Revision
A4		
Date:	7/11/2026	Sheet of
File:	C:\Users\...\UWB_IMU.SchDoc	Drawn By:

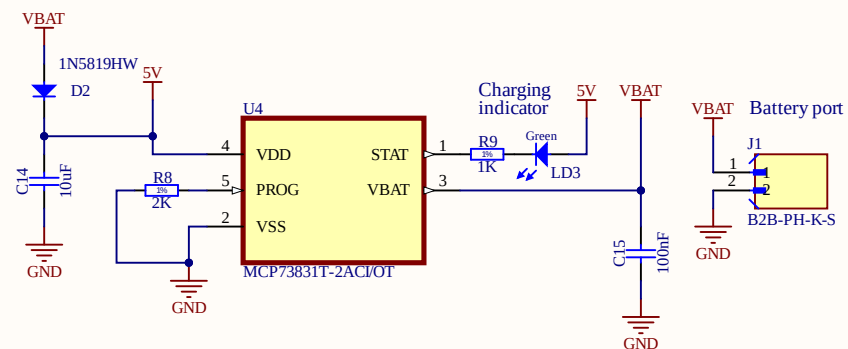

Title		
Size A4	Number	Revision
Date:	7/11/2026	Sheet of
File:	C:\Users\...\Power.SchDoc	Drawn By:

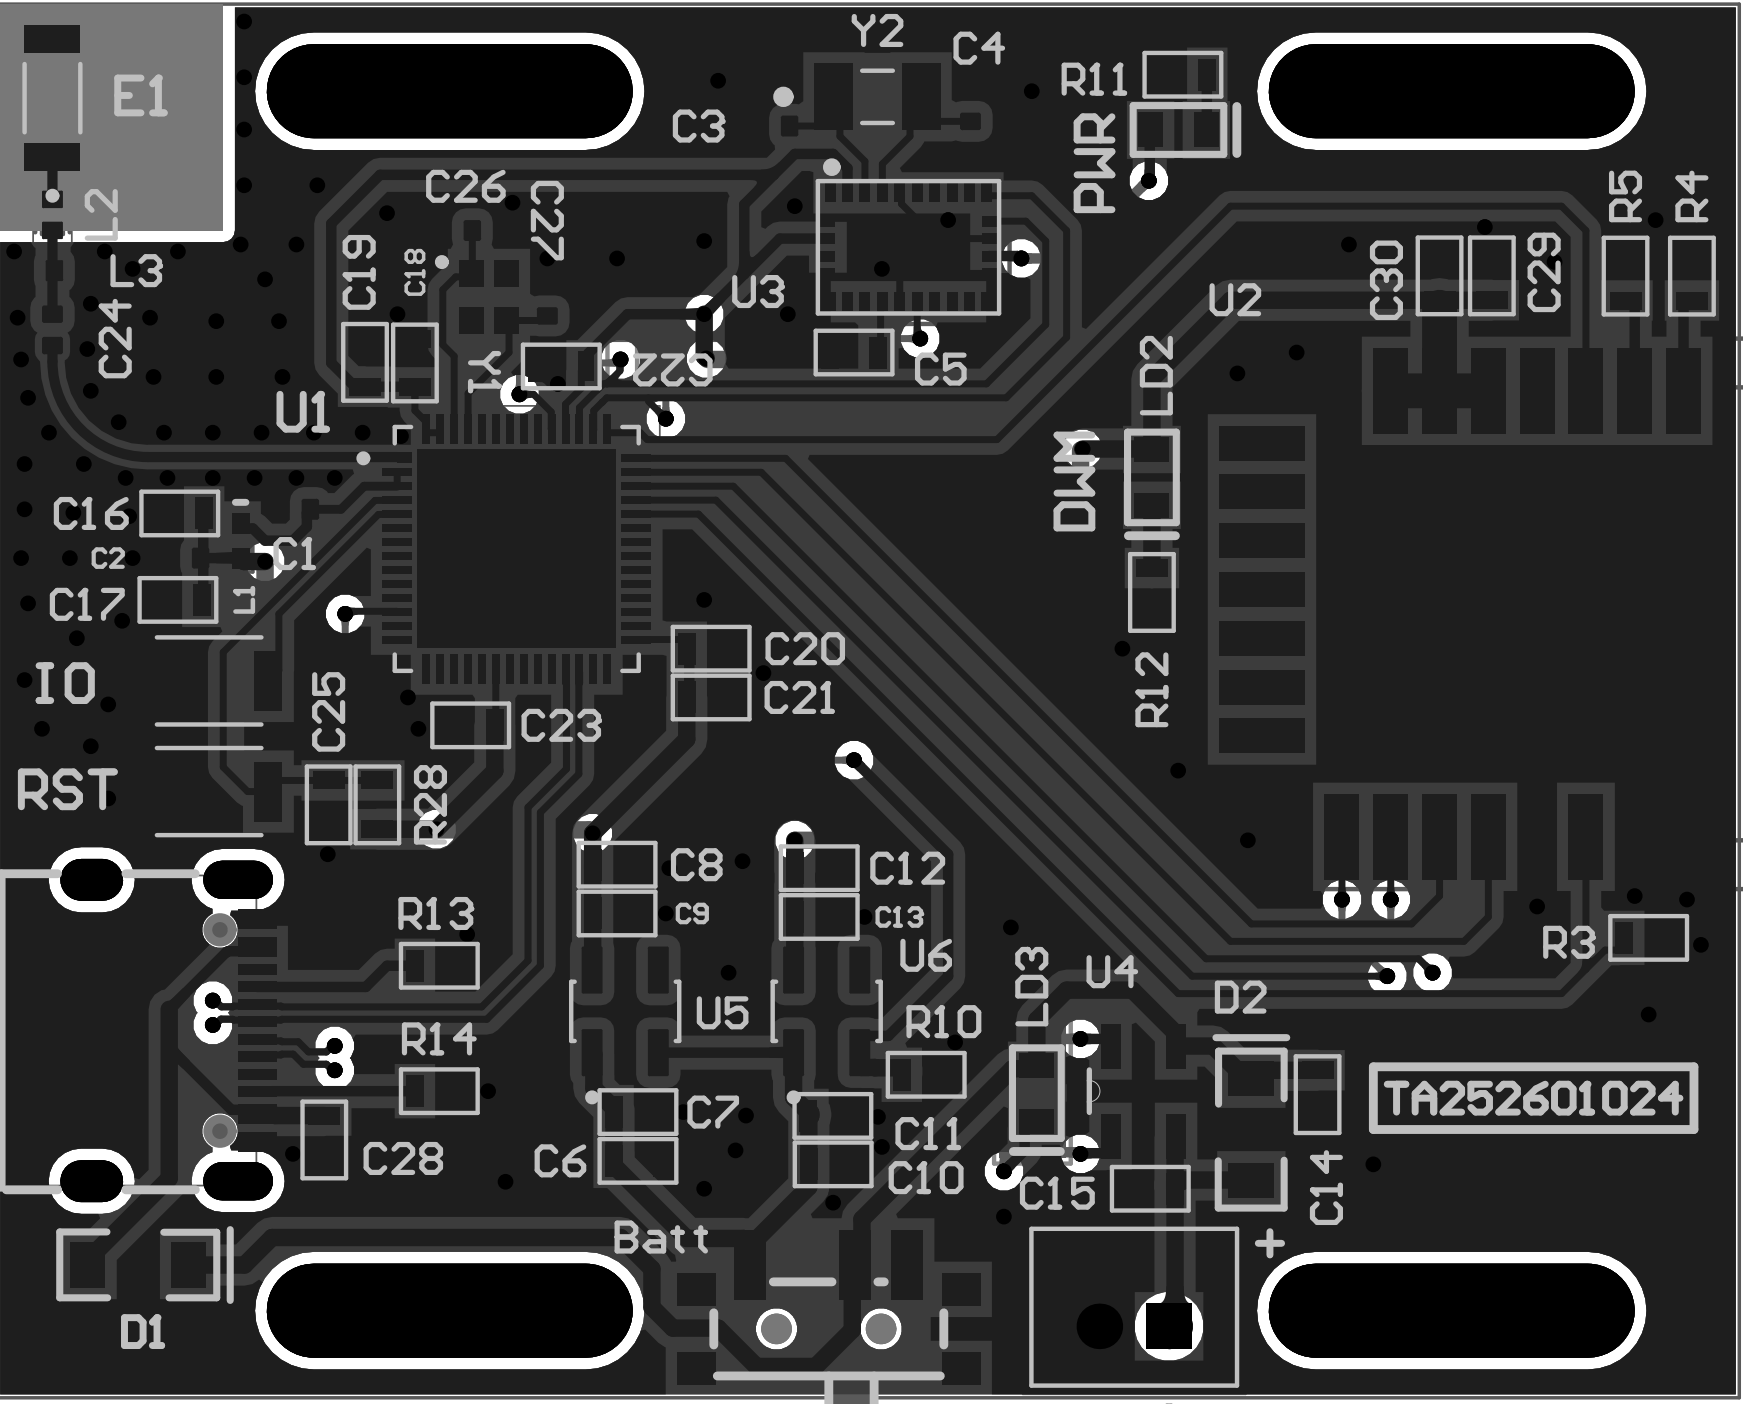

Comment	Description	Designator	Footprint	LibRef	Quantity
100nF	10 pF A±5%50V Ceramic Capacitor C0G, NP0 0402 (1.005 Metric)	C1, C2	CAPC1005X55N	0402N100.500CT	2
22pF	10 pF A±5%50V Ceramic Capacitor C0G, NP0 0402 (1.005 Metric)	C3, C4	CAPC1005X55N	0402N100.500CT	2
100nF	Non-polarised capacitor	C5, C7, C9, C11, C13, C15, C18, C20, C22, C23, C29	0603C	Capacitor - non polarized	11
10uF	Non-polarised capacitor	C6, C8, C10, C12, C14, C16, C17, C19, C21, C25, C28, C30	0603C	Capacitor - non polarized	12
500R07SLR2B4T	1.2 pF A±0.1pF50V Ceramic Capacitor C0G, NP0 0402 (1.005 Metric)	C24	CAPC1005X55N	500R07SLR2B4T	1
12pF	10 pF A±5%50V Ceramic Capacitor C0G, NP0 0402 (1.005 Metric)	C26, C27	CAPC1005X55N	0402N100.500CT	2
1N5819HW	Diode Anode Pin 1 Cathode Pin 3 (Pas de pin 2)	D1, D2	SOD-123FL	Diode 1LC3	2
2450AT18B100E	2.4GHz- Chip RF Antenna 2.4GHz ~ 2.5GHz 0.5dBi Solder Surface Mount	E1	XDOR_2450AT18B100 E	2450AT18B100E	1
B2B-PH-K-S	Connector Header Through Hole 2 position 0.079 (2.00mm)	J1	JST_B2B-PH-K-S	B2B-PH-K-S	1
Inductor	Inductor	L1	0402-A	Inductor	1
L-07C3N3S6T	3.3 nH Unshielded Multilayer Inductor 300 mA 190mOhm Max 0402 (1.005 Metric)	L2	INDC1005X60N	L-07C3N3S6T	1
L-07C2N7S6T	3.3 nH Unshielded Multilayer Inductor 300 mA 190mOhm Max 0402 (1.005 Metric)	L3	INDC1005X60N	L-07C3N3S6T	1
	LED Red 1C2A	LD1, LD2	0603 LED	LED Red 1C2A	2
GREEN	LED Green 1C2A	LD3	0603 LED	LED Green 1C2A	1
10K	Resistor - 1%	R3, R26, R27, R28	0603R	Resistor - 1% 1	4
1K	Resistor - 1%	R4, R5, R9, R10	0603R	Resistor - 1% 1	4
2K	Resistor - 1%	R8, R11, R12	0603R	Resistor - 1% 1	3
5K1	Resistor - 1%	R13, R14	0603R	Resistor - 1% 1	2
B3U-1000PM	Top, w/o Boss 1k Feet 1, Omron Electronic Components B3U- 1000PM	SW1, SW2	SW_B3U-1000PM	B3U-1000PM	2
MK-12C02-G020		SW3	SW-SMD_MK-12C02- G020	MK-12C02-G020	1
ESP32-S3FH4R2	RF System on a Chip - SoC-SMD IC ESP32- S3FH4R2, dual-core MCU, Wi-Fi 2.4G & BLE 5.0 combo, 4 MB flash and 2 MB PSRAM inside, QFN 56-pin, 7* 7 mm	U1	QFN40P700X700X90- 57N	ESP32-S3FH4R2	1
DWM1000	802.15.4 IR UWB Transceiver Module 3.5GHz ~ 6.5GHz Integrated, Chip Surface Mount	U2	XCVR_DWM1000	DWM1000	1
BNO055	BNO055 9-axis Absolute Orientation Sensor (5P) w/ Sensors and Sensor Fusion	U3	LGA28P50P4X10_380 X520X100	BNO055	1
MCP73831T-2ACI/OT	Charger IC Lithium Ion/Polymer SOT-23-5	U4	SOT95P280X145-5N	MCP73831T-2ACI/OT	1
AP2112K-3.3TRG1	Linear Voltage Regulator IC Positive Fixed 1 Output 600mA SOT-25	U5, U6	SOT95P285X140-5N	AP2112K-3.3TRG1	2
TYPE-C 16PIN 2MD(073)		USB1	USB-C-SMD_TYPE-C- 6PIN-2MD-073	TYPE-C 16PIN 2MD(073)	1
XRCGB40M000F1SLB R0	Crystal 40MHz A±10ppm (ToI) A±10ppm (Stability) 8pF 50Ohm 4-Pin CSMD T/R	Y1	OSC_XRCGB40M000F 1SLBR0	XRCGB40M000F1SLB R0	1
32kHz	32.768kHz 20ppm Crystal 6pF 20 kOhm - 40C ~ 85C Surface Mount 2-SMD, No Lead 3.2x1.5	Y2	XTAL_ECS_327-6- 34RRR-TR	ECS-327-6-34RRR-TR	1