


USB to serial UART interface

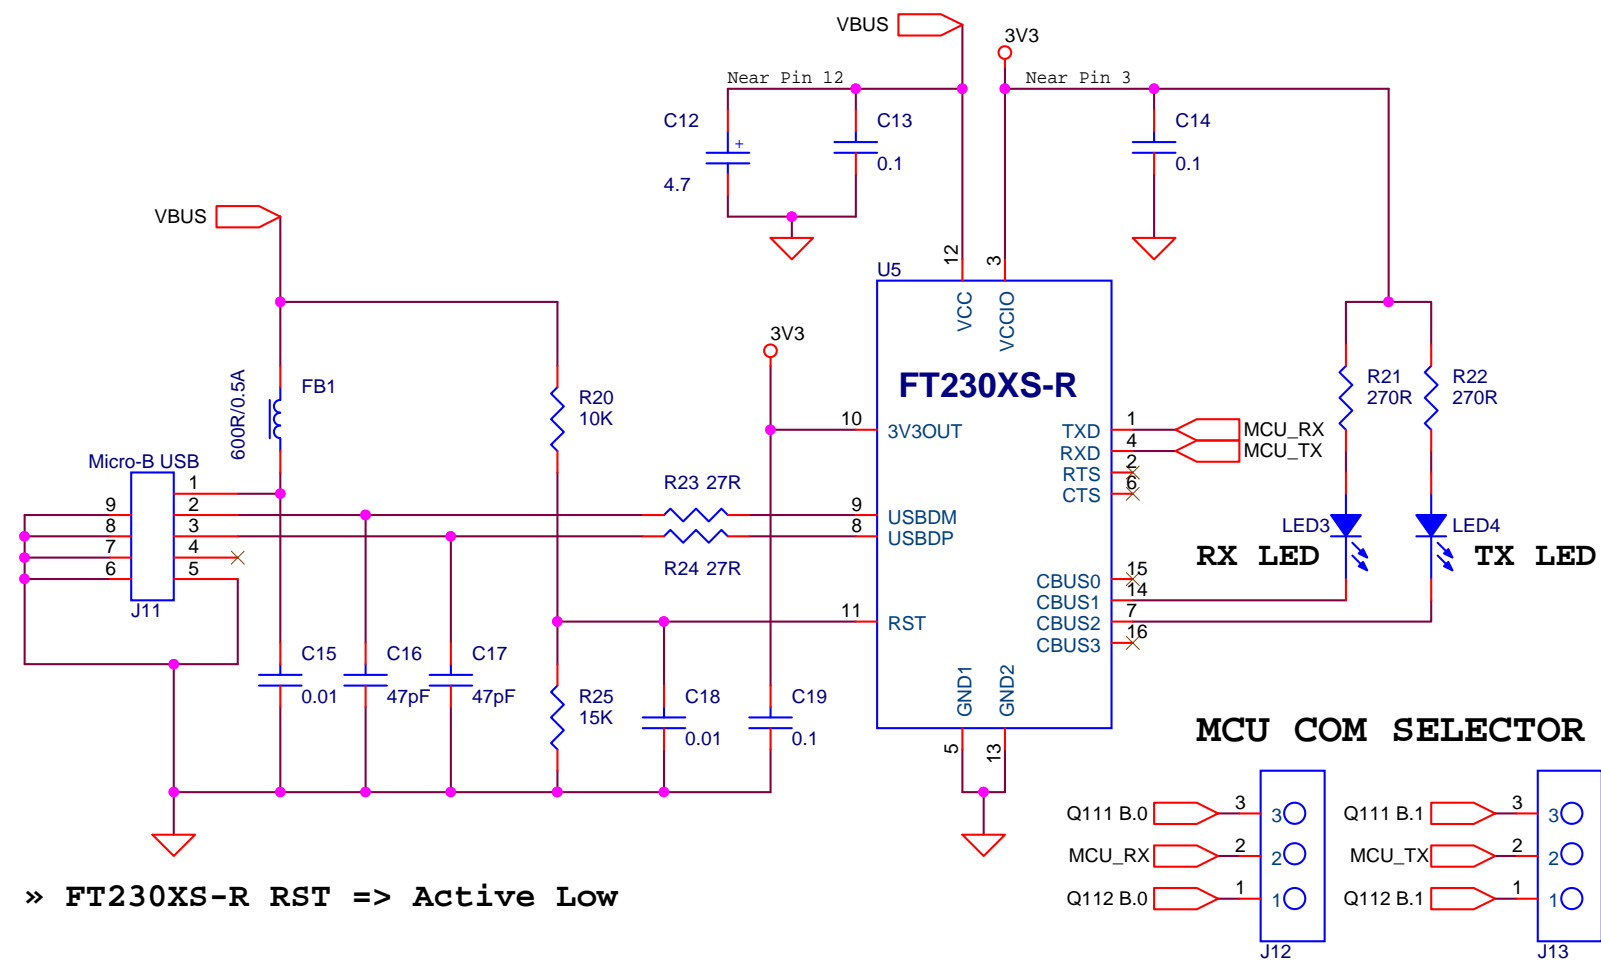

The MTP memory on this FT-230XS-R device can be programmed directly over USB, using the FT\_Prog utility to set the required options and program it. See: [www.ftdichip.com/Support/Utilities.htm#FT\\_Prog](http://www.ftdichip.com/Support/Utilities.htm#FT_Prog)

Title			LaPi - Mini LPMCU Eval Board		
Size	Document Number				Rev
B	FTDI Portion of Circuit				1.9
Date:	Wednesday, April 10, 2013		Sheet	2	of 2