High Power Low Ohmic Chip Resistors <Wide Terminal type>

LTR Series

●Features

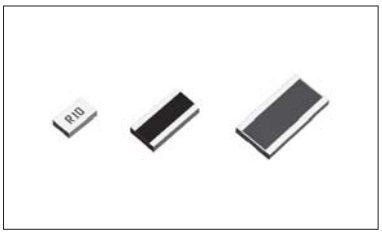

1) Chip Resistors for current detection : 10mΩ ~
2) High joint reliability with long side terminations.
3) Improvement of rated power enables to displace smaller size of resistors, and it contributes space savings in your set.
4) ROHM resistors have obtained ISO9001 / ISO / TS16949 certification.
5) Corresponds to AEC-Q200. (LTR10)

●Products List

Part No.	Size (mm)	Size (inch)	Rated Power (70˚C) (W)	Resistance Tolerance (%)	Temperature Coefficient (ppm / ˚C)	Resistance Range	Series	Operating Temperature Range (˚C)
LTR10	2012	0805	0.5	J(±5%)	±150	47mΩ to 9.1Ω	E24	–55 to +155
				F(±1%)				
LTR18	3216	1206	1	J(±5%) F(±1%)	0 to 300	10mΩ to 18mΩ		
					0 to 200	20mΩ to 47mΩ		
					0 to 150	51mΩ to 470mΩ		
					±100	510mΩ to 1Ω		
LTR100	6432	2512	2	J(±5%)	±200	100mΩ to 910mΩ		
				F(±1%)	0 to 150			

∗Design and specifications are subject to change without notice.
Carefully check the specification sheet supplied with the product before using or ordering it.

●Part Number Description

L T R	1 0	E V H	J	L	1 R 0
Part No.	**Size** (mm [inch])	**Packaging Specifications Code**	**Resistance Tolerance**	**Special part code**	**Nominal Resistance**
LTR (High Power Chip resistor <Wide Terminal type>)	10 (2012 [0805]) 18 (3216 [1206]) 100 (6432 [2512])		F (±1%) J (±5%)	U : 10mΩ S : 11mΩ to 91mΩ L : 100mΩ to	Resistance code, 3 or 4 digits.

Packaging Specifications Code

Part No.	Code	Packaging specifications	Quantity /Reel
LTR10	EVH	Paper tape (4mm Pitch)	5,000
LTR18	EZP	Paper tape (4mm Pitch)	5,000
LTR100	JZP	Embossed tape (4mm Pitch)	4,000

Nominal Resistance

Resistance tolerance + Special code	Resistance code
FU, FS, FL, JS	: 4 digits
JU, JL	: 3 digits

●Chip Resistor Dimensions and Markings

■ LTR10



■ LTR18 / 100



<Marking method>
There are three or four digits used for the calculation number according to IEC code and “R”is used for the decimal point.
Ex.) 4digits·····62mΩ = R062, 100mΩ = R100
3digits·····100mΩ = R10, 1Ω = 1R0

(Unit : mm)

Part No.	(mm)	(inch)	L	W	t	a	b	Marking existence
LTR10	2102	0805	1.2±0.1	2.0±0.1	0.55±0.1	0.3±0.2	0.35±0.2	Yes
LTR18	3216	1206	1.6±0.1	3.2±0.1	0.58±0.1	0.5±0.2	0.5±0.2	No
LTR100	6432	2512	3.2±0.15	6.4±0.15	0.55±0.15	0.4±0.25	1.13±0.25	No

●Land pattern Example

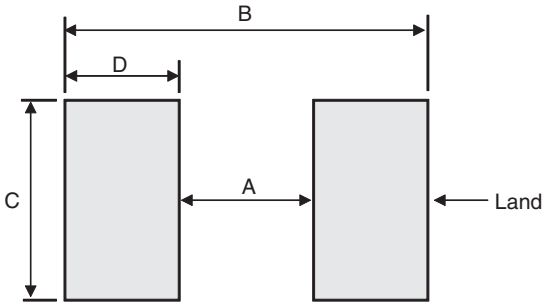

(Unit : mm)

Dimensions / Part No.	A	B	C	D
LTR10	0.50	1.98	2.20	0.74
LTR18	0.55	2.90	3.20	1.18
LTR100	0.83	3.69	6.40	1.43

●Derating Curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curves below.

■ LTR10 / 18 / 100

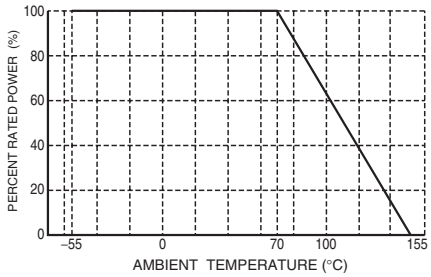

●Characteristics

Test Items	Guaranteed Value Resistor Type	Test Conditions
Resistance	See P.1	20°C Measuring method : Measure under terminations by 4 probes. 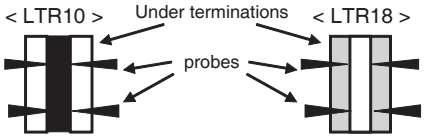
Variation of resistance with temperature	See P.1	Measurement : +20 / –55 / +20 / +125°C
Overload	± (2.0%+0.0005Ω)	Rated voltage (current) ×2.5, 2s
Solderability	A new uniform coating of minimum of 95% of the surface being immersed and no soldering damage.	Rosin·Ethanol : 25% (Weight) Soldering condition : 235±5°C Duration of immersion : 2.0±0.5s
Resistance to soldering heat	± (1.0%+0.005Ω) No remarkable abnormality on the appearance.	Soldering condition : 260±5°C Duration of immersion : 10±1s
Rapid change of temperature	± (1.0%+0.0005Ω)	Test temp. : –55°C to +125°C 5cycle
Damp heat, steady state	± (3.0%+0.0005Ω)	40°C, 93%RH (Relative Humidity) Test time : 1,000h to 1,048h
Endurance at 70°C	± (3.0%+0.0005Ω)	70°C Rated voltage (current) 1.5h : ON – 0.5h : OFF Test time : 1,000h to 1,048h
Endurance	± (3.0%+0.0005Ω)	155°C Test time : 1,000h to 1,048h
Resistance to solvent	± (0.5%+0.0005Ω)	23±5°C, Immersion cleaning, 5±0.5min Solvent : 2–propanol
Bend strength of the end face plating	Without mechanical damage such as breaks.	–

Compliance Standard(s) : IEC60115–8
JISC 5201–8

●Technical data

Parameter	Unit	LTR10	LTR18	LTR100
Failure rate	Fit	0.2484	–	–
Weight	mg/pc	5.49	12.135	38.15

●Tape Dimensions

■ Paper Tape

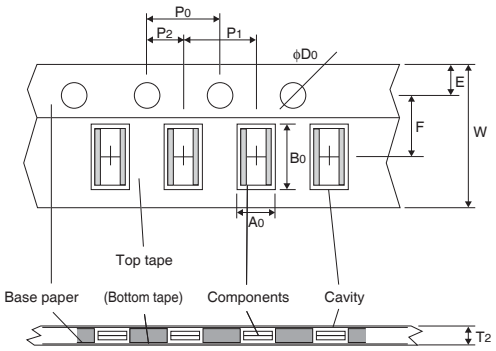

(Unit : mm)

Part No.	W	F	E	A0	B0
LTR10	8.0±0.3	3.5±0.05	1.75±0.1	1.45±0.1	2.3±0.1
LTR18	8.0±0.3	3.5±0.05	1.75±0.1	$1.95^{+0.1}_{-0.05}$	$3.5^{+0.15}_{-0.05}$

Part No.	D0	P0	P1	P2	T2
LTR10	$\phi 1.5^{+0.1}_{0}$	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1
LTR18	$\phi 1.5^{+0.1}_{0}$	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1

■ Embossed Tape

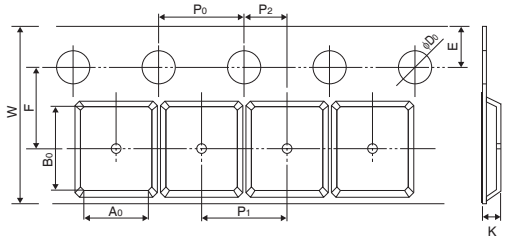

(Unit : mm)

Part No.	W	F	E	A0	B0
LTR100	12.0±0.3	5.5±0.05	1.75±0.1	3.5±0.2	6.7±0.2
	D0	P0	P1	P2	T2
	$\phi 1.5^{+0.1}_{0}$	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1

●Reel Dimensions

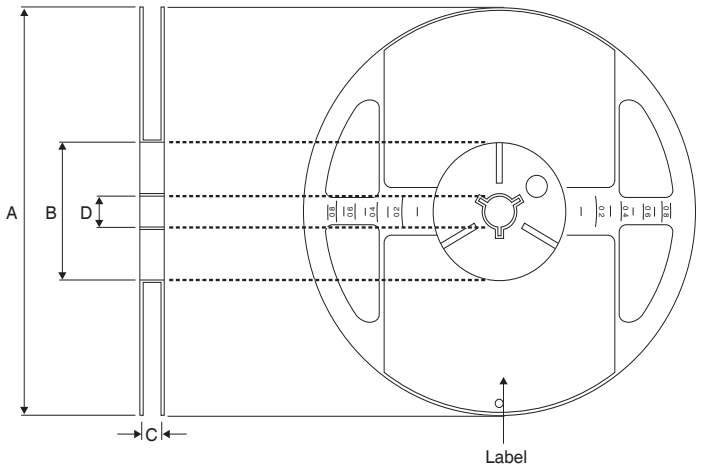

ACCORDING TO EIAJ ET-7200B

(Unit : mm)

Part No.	A	B	C	D
LTR10	$\phi 180^{0}_{-1.5}$	$\phi 60^{+1.0}_{0}$	$9^{+1.0}_{0}$	φ13±0.2
LTR18				
LTR100			$13^{+1.0}_{0}$	

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/