

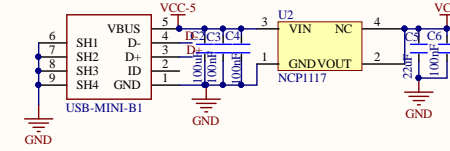


ROM

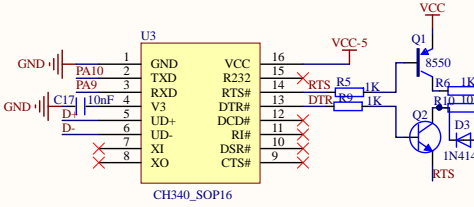


Micro USB connects usb to t1l chip, can do serial communication, ros communication can use this interfaceText


UART 1 PA9, PA10

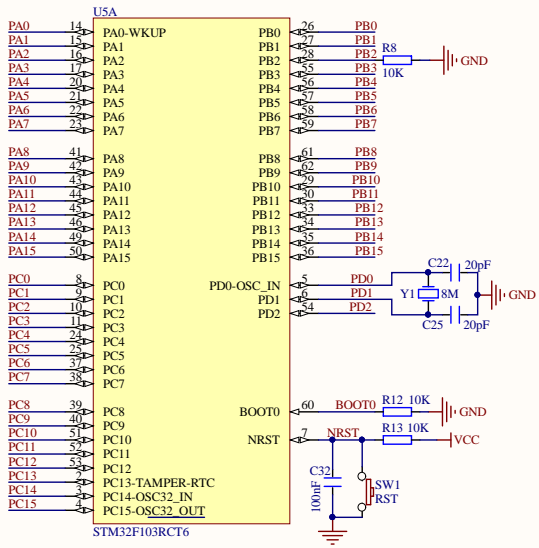


USB-UART

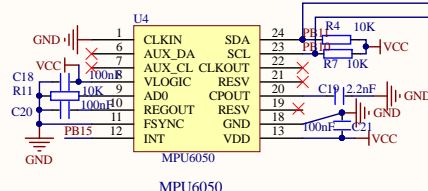


MPU6050

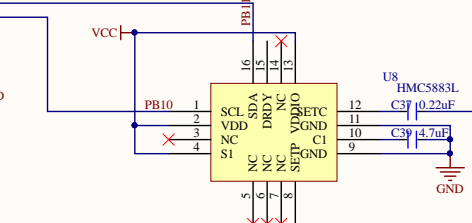


HMC5883L

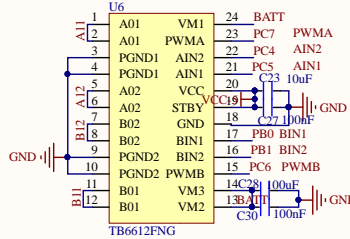


Motor Driver

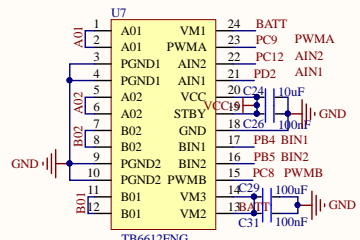


TB6612FNG




BT



UART



PS2



J3

desire
14p
14i
14o




SWD




key1


key2




MCU



TIM2




MA




MB


Encoding motor interface



MC



MD



LED

Title		
MOEBIUS TECHNOLOGY		
Size	Number	Revision
A3		
Date:	2020-10-22	Sheet of
File:	F:\moebius\1\MecanumTb66212 - 副本	Submitted By: