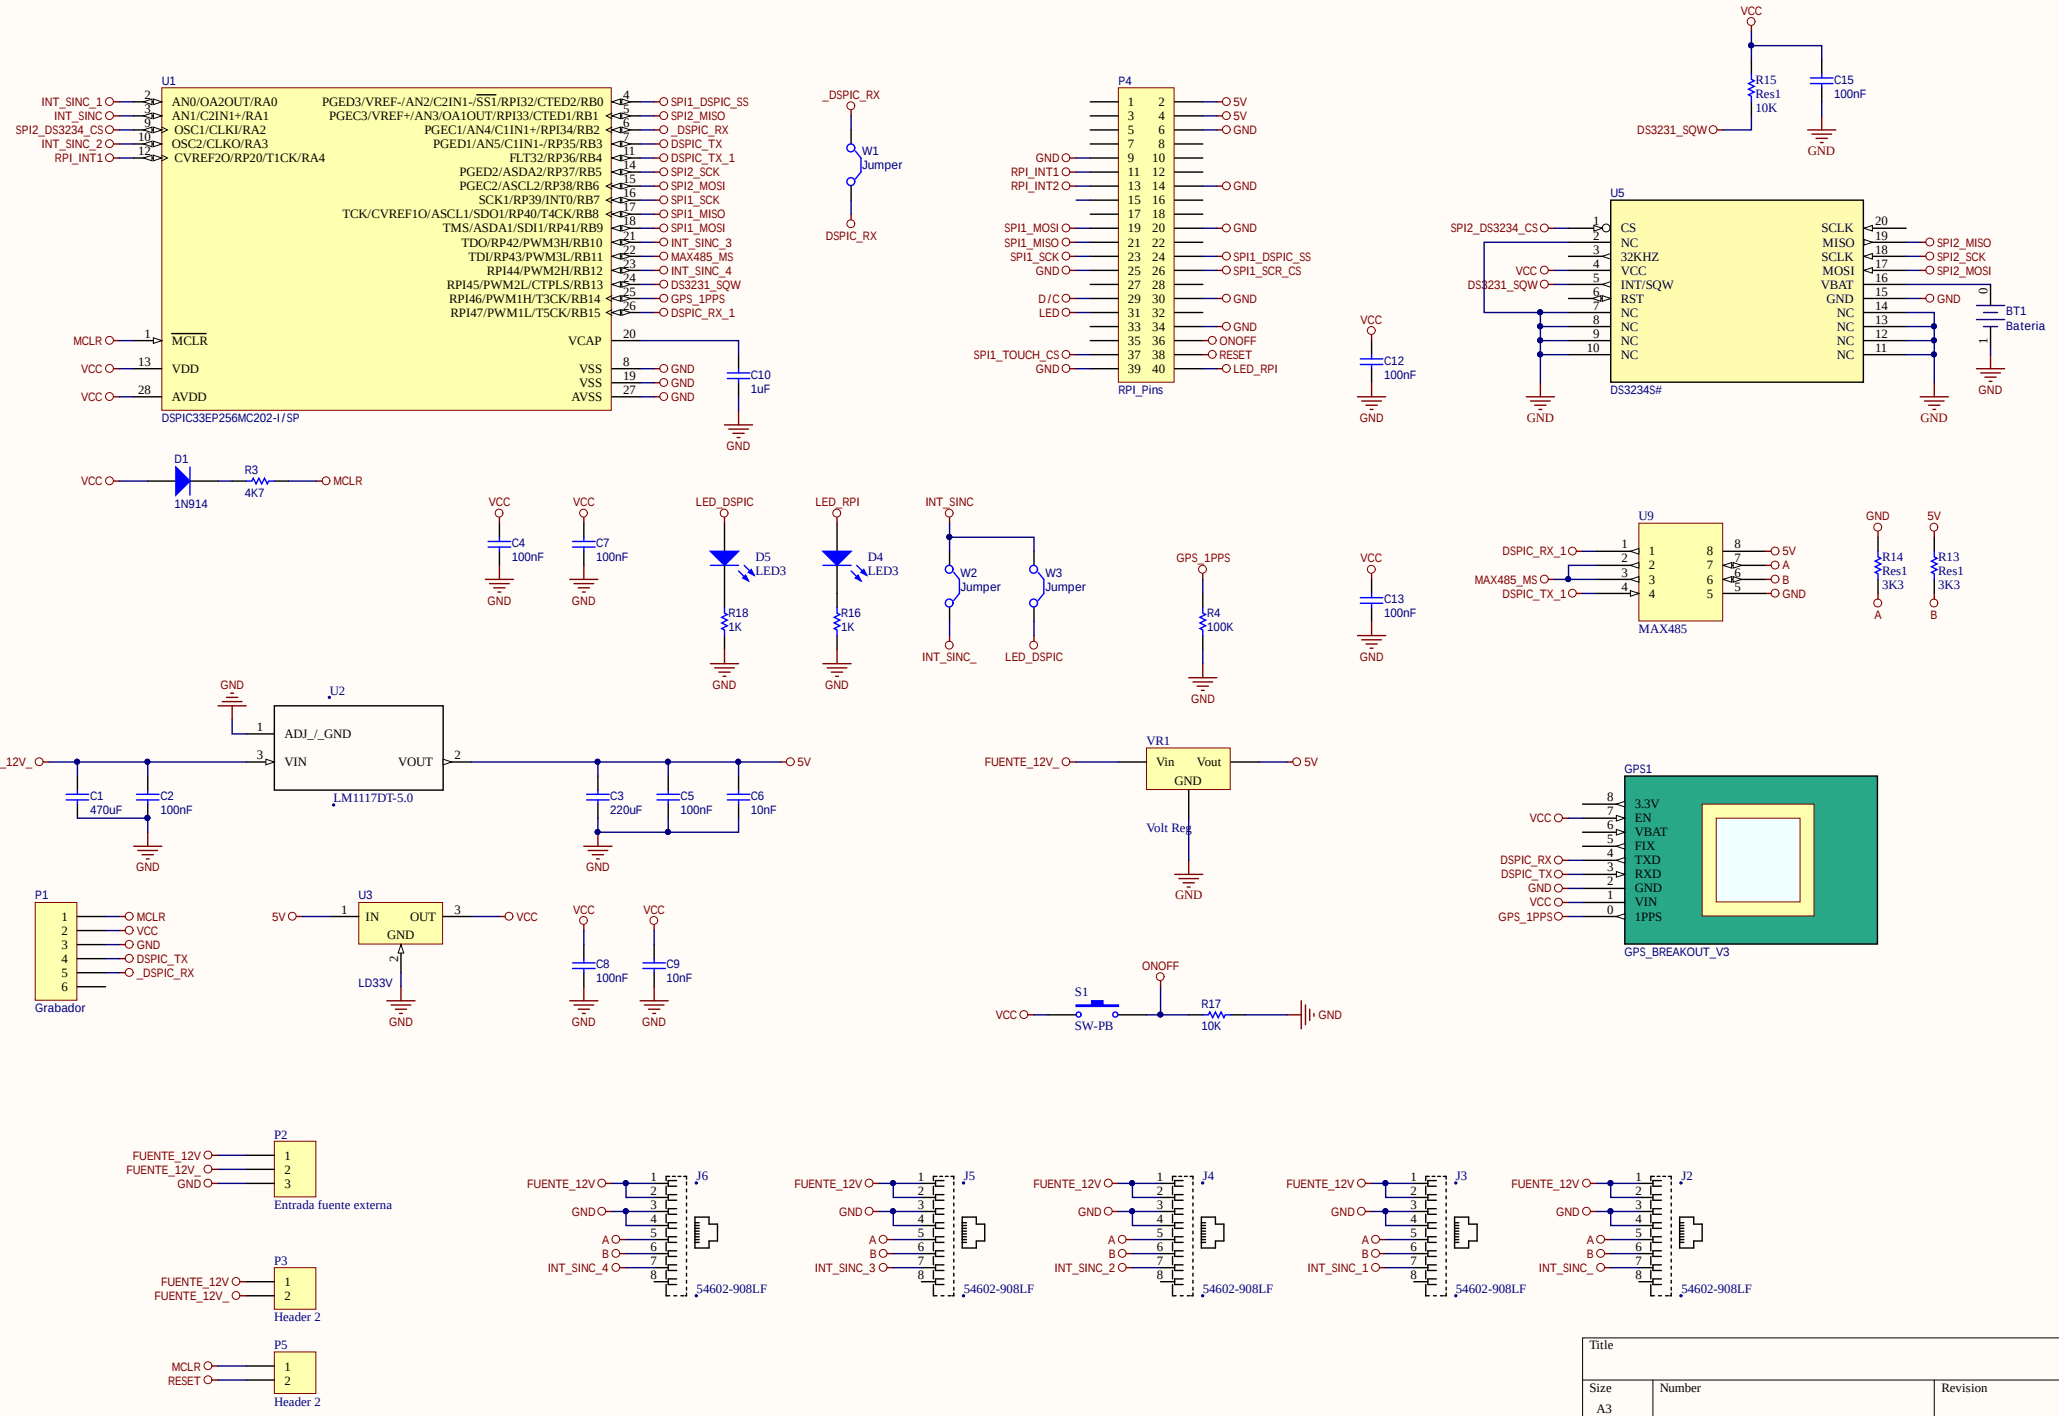

U1
DSPIC33EP256MC202-I/SP
P4
RPI_Pins
U5
DS3234S#
BT1
Bateria
D1
1N914
U2
LM1117DT-5.0
D5
LED3
D4
LED3
U9
MAX485
VR1
Volt Reg
GPS1
GPS_BREAKOUT_V3
P1
Grabador
U3
LD33V
S1
SW-PB
P2
Entrada fuente externa
P3
Header 2
P5
Header 2
J6
J5
J4
J3
J2
54602-908LF
W1
Jumper
W2
Jumper
W3
Jumper
Title
Size
A3
Number
Revision
Date: 4/4/2020
File: C:\Users\..\Sheet1.SchDoc
Sheet of
Drawn By:

Comment	Description	Designator	Footprint	LibRef	Quantity
Bateria		BT1	Bateria-DS1307	BateriaDS1307	1
Cap	Capacitor	C1, C3	C100UFB	Cap	2
Cap	Capacitor	C2, C4, C5, C6, C7, C8, C9, C10, C12, C13, C15	RAD0.2	Cap	11
1N914	High Conductance Fast Diode	D1	DO-35	Diode 1N914	1
LED3	Typical BLUE SiC LED	D4, D5	LED2	LED3	2
GPS_BREAKOUT_V3		GPS1	GPS_BREAKOUT_V3	GPS_BREAKOUT_V3	1
54602-908LF	Jack Modular Connector 8p8c _RJ45, Ethernet_ 90Â° Angle _Right_ Unshielded Cat3	J2, J3, J4, J5, J6	*AMPHENOL_54602-908LF	54602-908LF	5
Grabador	Header, 6-Pin	P1	HDR1X6	Header 6	1
Entrada fuente externa	Header, 3-Pin	P2	MOLEX-3	Header 3	1
Header 2	Header, 2-Pin	P3, P5	Header 1X2	Header 2	2
RPI_Pins	Header, 20-Pin, Dual row	P4	HDR2X20	Header 20X2	1
Res1	Resistor	R3, R4, R13, R14, R15, R16, R17, R18	AXIAL-0.3	Res1	8
SW-PB	Switch	S1	PULSA4	SW-PB	1
DSPIC33EP256MC202-I/SP	16-Bit Microcontroller and Digital Signal Controller with High-Speed PWM, Op Amps and Advanced Analog, 70 MIPS, 21 I/O, GPIO, -40 to 85 degC, 28-pin SPDIP (SP28), Tube	U1	MCHP-SPDIP-SP28	DSPIC33EP256MC202-I/SP	1
LM1117DT-5.0	Linear Voltage Regulator IC 1 Output 800mA TO-252-3	U2	*TO228P970X238-3N	LM1117DT-5.0	1
LD33V	High-Performance 16-bit Digital Signal Controller, 24 KB Flash, 2 KB SRAM, 1 KB EEPROM, 40-Pin PDIP, Industrial Temperature	U3	SOT-223	LD33V	1
DS3234S#	No Description Available	U5	21-0042B_20	DS3234S#	1
MAX485		U9	MAX485	MAX485	1
Volt Reg	Voltage Regulator	VR1	TO-220V	Volt Reg	1
Jumper	Jumper Wire	W1, W2, W3	SIP-2	Jumper	3